

SHIELDED SMD INDUCTOR DR331-9 SERIES

Features






- Surface Mount Design
- Inductance Range from 10 μ H to 1000 μ H
- Operating Temp. -40°C to +85°C
- Tinned Leads with Leaded Solder is Available (note 8)



ELECTRICAL SPECIFICATIONS AT 25°C

Part No.	Inductance (μ H) $\pm$ 20%	DCR (Ω) Max.	I rms (A) Max.	I sat (A) Max.	SRF MHz (REF.)
DR331-9-102	1	0.009	8.6	20	80
DR331-9-222	2.2	0.014	7.1	16	80
DR331-9-332	3.3	0.018	6.2	14	60
DR331-9-562	5.6	0.020	5.3	12	40
DR331-9-103	10	0.031	4.3	10	30
DR331-9-153	15	0.036	4	8.0	22
DR331-9-223	22	0.047	3.5	7.0	20
DR331-9-333	33	0.066	3	5.5	15
DR331-9-473	47	0.086	2.6	4.5	9.0
DR331-9-683	68	0.13	2.3	3.5	8.0
DR331-9-104	100	0.19	1.8	3.0	7.0
DR331-9-154	150	0.25	1.5	2.6	6.0
DR331-9-224	220	0.38	1.2	2.4	5.0
DR331-9-334	330	0.56	1.0	1.9	4.0
DR331-9-474	470	0.85	0.82	1.4	3.0
DR331-9-684	680	1.1	0.72	1.2	2.5
DR331-9-105	1000	1.8	0.56	1.0	2.0

MECHANICAL SPECIFICATIONS

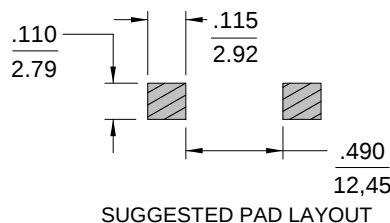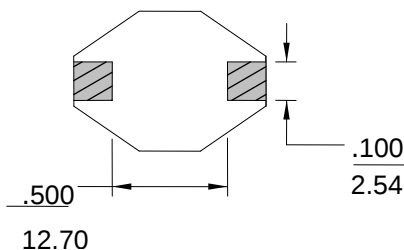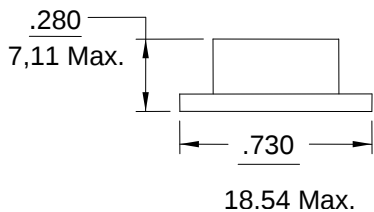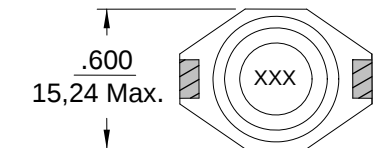

NOTES:

1. Dimensions are shown in inches/millimeters
Unless otherwise specified, tolerance
= Inches: ± 0.010
= Millimeters: $\pm 0,30$
2. Isat based on the inductance being 90% of its initial value
3. Irms based on temperature rise of 40°C
4. Tape & Reel Packaging, 400 pcs / reel.
5. Inductance tested at 0.1 Vrms @ 100 kHz
6. Terminal finish is compliant to RoHS requirements
7. Solder in accordance with J-STD-002 Rev. D
8. Non-RoHS series parts 42-331-9-XXX are finished with leaded solder Sn60Pb40 or equivalent