


DIGITAL PROCESS DATA LINE PROTECTOR

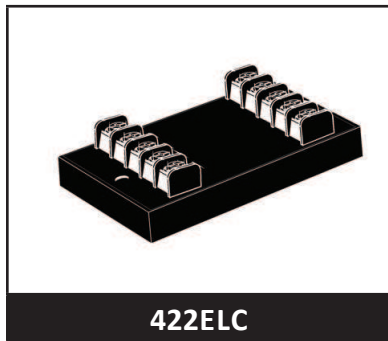

422ELC

DESCRIPTION

The 422ELC is low capacitance, two-stage transient voltage protector that provides primary and secondary protection against lightning, inductive switching and electrostatic discharge (ESD) transient threats. The first stage diverts the transient current through the ground terminal return path and the second stage clamps the voltage to a safe level without interruption of service.

The 422ELC is designed to protect data lines from differential (line-line) and common-mode (line-to-ground) transients. Terminals 1 & 2 and 3 & 4 for the 422ELC are designed as line pairs. A transient voltage suppressor is connected across each line pair for differential mode protection. Each line pair is referenced to ground.

This product can also be used on telephone, signal/data lines, security, timing and control interface circuits. For most applications, the product should be located as close as possible to the equipment being protected. A low impedance grounding system is important to maintain a low voltage clamp between the line-to-ground connection. Capacitance over the operating voltage range is important. If capacitance is nonlinear, distortion, loss of data or access to the I/O port can occur (See Figure 1).

APPLICATIONS


- RS-422 Data Lines
- Digital Process Control Loop
- Long Line Digital Systems
- Digital Transmission
- Telemetry Systems
- Smoke Detector and Fire Alarm Systems

FEATURES

- Compatible with IEC 61000-4-2 (ESD): Air - 15kV, Contact - 8kV
- Compatible with IEC 61000-4-4 (EFT): 40A - 5/50ns
- Compatible with IEC 61000-4-5 (Surge): 95A, 8/20 μ s, Level 4 (Line-Gnd) & 48A, Level 4 (Line-Line)
- Low Capacitance - 25pF
- Designed for EIA Standard RS-422 Data Lines
- Permanent Two-Stage 2 Line Pair Protector
- Subnanosecond Response Time
- Common & Differential Mode Protection
- Automatic Reset - Does Not Interrupt Service
- Effective Against Lightning, Inductive Switching and ESD

MECHANICAL CHARACTERISTICS

- Approximate Weight: 142 grams
- Flammability Rating UL 94V-0

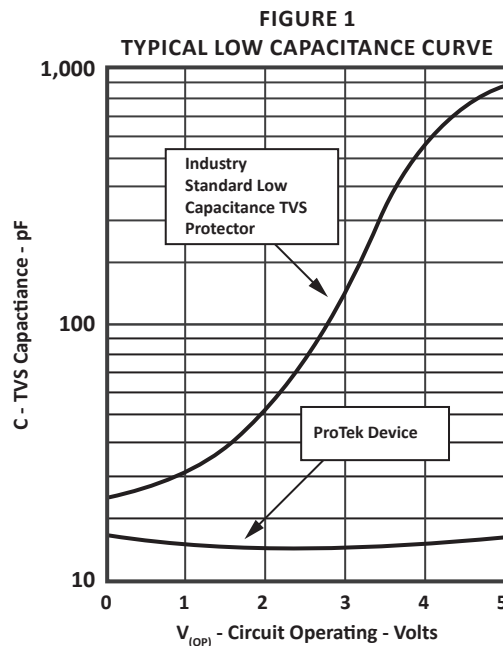

TYPICAL DEVICE CHARACTERISTICS

MAXIMUM RATINGS @ 25°C Unless Otherwise Specified			
PARAMETER	SYMBOL	VALUE	UNITS
Peak Operating Line Voltage	V_{OP}	±12	Volts
Operating Line Current	I_O	200	mA
Transient Voltage	-	20	kV/Wire
Transient Current - 8/20µs waveform	-	10	kA/Wire
Transient Current - 8/20µs waveform	-	40	kA/Wire
Operating Temperature	T_A	-55 to 100	°C
Storage Temperature	T_{STG}	-55 to 100	°C
Response Time	-	< 1	ns


ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified					
PART NUMBER	MAXIMUM CLAMPING VOLTAGE (8/20µs) LINE-LINE @ 500A V_C ±VOLTS	MAXIMUM CLAMPING VOLTAGE (8/20µs) LINE-GND @ 500A V_C ±VOLTS	MAXIMUM LINE THROUGHPUT RESISTANCE R OHMS	MAXIMUM LEAKAGE CURRENT @ 12V_{OP} I_D µA	MAXIMUM CAPACITANCE @ 0V, 1MHz C pF
422ELC	30.0	30.0	12	1	25

PACKAGE INFORMATION

INSTALLATION INSTRUCTIONS & DIAGRAM

There are five (5) terminals on the LINE SIDE and five (5) terminals on the EQUIPMENT SIDE of the 422ELC, 4 data lines and one ground. Both grounds are connected together internally. A single low impedance ground is sufficient. Incoming data lines are cut or disconnected from the equipment to insert the 422ELC product. The incoming lines are to be connected to the line side terminals as the equipment side lines are connected to the equipment side terminals. The location of the product should be as close to the equipment as possible. The 422ELC series is designed with a short circuit failure mode to give maximum protection. A fuse, fusible link, or circuit breaker is recommended for each data/signal line on the input side for those that require an open circuit failure mode.

Caution: A low DC resistance ground may not be a good ground. Lightning contains a broad spectrum of frequencies up to 1 MHz. A low impedance path to ground at the transient frequencies is necessary. A ground strap is recommended or a #6 AWG stranded wire. For wire lengths over 1.5 meters, there may be some excessive line to earth potential under severe thunderstorm conditions.


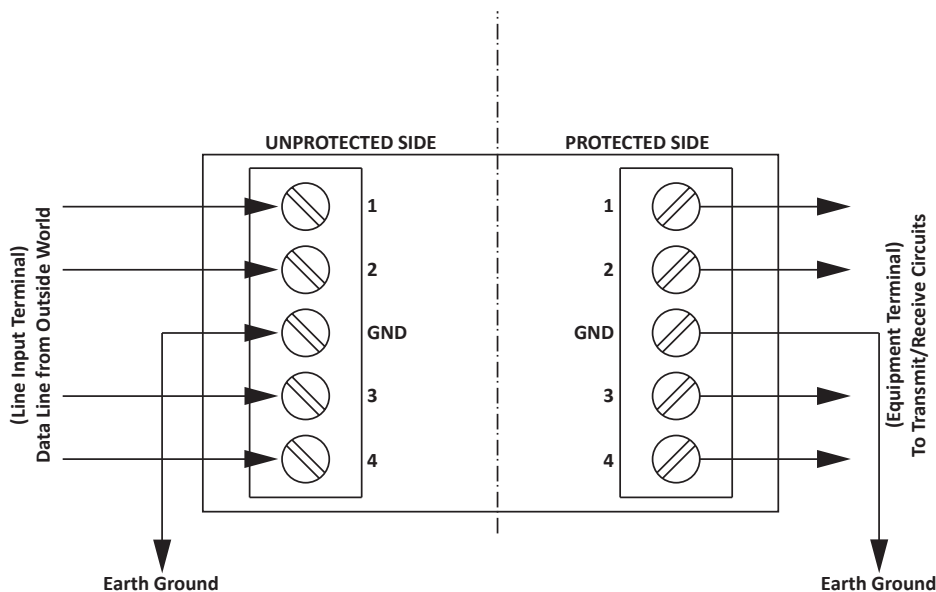


Note: Both ground terminals are common. Use second ground wire to reduce impedance on long runs to earth ground connections.

PACKAGE INFORMATION

OUTLINE DIMENSIONS

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	-	95.5	-	3.8
B	82.22	82.98	3.235	3.265
C	-	57.2	-	2.25
D	-	30.2	-	1.125
E	-	15.5	-	0.61
F	-	30.2	-	1.19

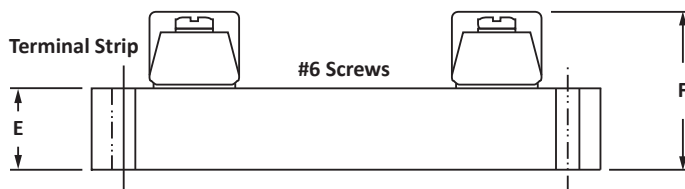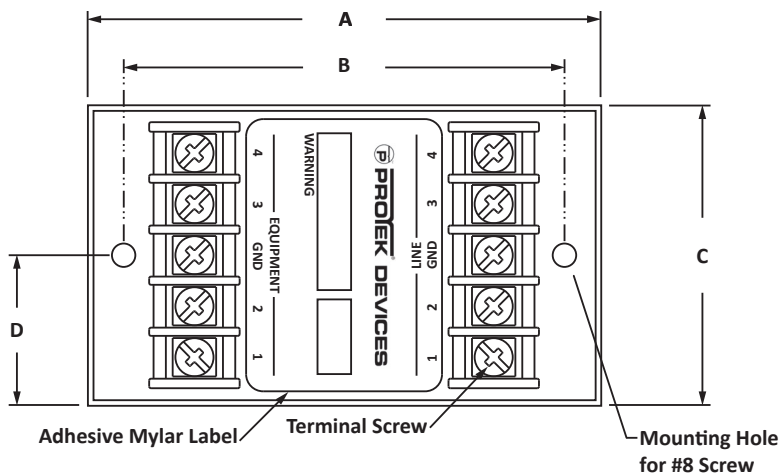

ORDERING INFORMATION

BASE PART NUMBER	MARKING
422ELC	Logo, Date Code, Terminal Designations and Part Number

COMPANY INFORMATION

COMPANY PROFILE

In business more than 20 years, ProTek Devices™ is a privately-held company located in Tempe, Arizona, that offers a product line of transient voltage suppressors (TVS); avalanche breakdown diodes; steering diode TVS arrays and other surge suppressor component products. These TVS devices protect electronic systems from the effects of lightning, electrostatic discharge (ESD), nuclear electromagnetic pulses (NEMP), inductive switching and EMI / RFI. ProTek Devices also offers high performance interface and linear products that include analog switches; multiplexers; LED drivers; audio control ICs; RF and related high frequency products. The analog devices work in a host of consumer; industrial; automotive and other applications.

CONTACT US

Corporate Headquarters

2929 South Fair Lane
Tempe, Arizona 85282
USA

By Telephone

General: 602-431-8101
Sales: & Marketing: 602-414-5109
Customer Service: 602-414-5114
Product Technical Support: 602-414-5107

By Fax

General: 602-431-2288

By E-mail:

Sales: sales@protekdevices.com
Customer Service: service@protekdevices.com
Technical Support: support@protekdevices.com

ProTek Devices (Asia Pacific) Pte. Ltd.

8 Ubi Road 2, #06-19
Zervex
Singapore - 408538
Tel: +65-67488312
Fax: +65-67488313

Web

www.protekdevices.com

COPYRIGHT © ProTek Devices 1998 - This literature is subject to all applicable copyright laws and is not for resale in any manner.

SPECIFICATIONS: ProTek reserves the right to change the electrical and or mechanical characteristics described herein without notice.

DESIGN CHANGES: ProTek reserves the right to discontinue product lines without notice and that the final judgement concerning selection and specifications is the buyer's and that in furnishing engineering and technical assistance. ProTek assumes no responsibility with respect to the selection or specifications of such products. ProTek makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ProTek assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability without limitation special, consequential or incidental damages.

LIFE SUPPORT POLICY: ProTek Devices products are not authorized for use in life support systems without written consent from the factory.