

## 250W ENCAPSULATED FLIP CHIP TVS ARRAY

### DESCRIPTION

The PKFCxxC series encapsulated flip chips employ advanced silicon P/N junction technology for unmatched board-level transient voltage protection against Electrostatic Discharge (ESD) and Electrical Fast Transients (EFT). Developed specifically for high-density circuit protection, this series meets the IEC 61000-4-2 and 61000-4-4 requirements. These devices are ideally suited for handheld devices, PCMCIA and SMART cards.

This series provides ESD protection greater than 25 kilovolts with a peak pulse power dissipation of 250 Watts per line for an 8/20 $\mu$ s waveform. In addition, the PKFCxxC series features superior clamping performance, low leakage current characteristics and a response time of less than a nanosecond. Their low inductance virtually eliminates overshoot voltage due to package inductance.

### FEATURES

- Compatible with IEC 61000-4-2 (ESD): Air 15kV, Contact 8kV
- Compatible with IEC 61000-4-4 (EFT): 40A, 5/50ns
- Chip Scale Package 0.050" x 0.030"
- ESD Protection > 25 kilovolts
- Available in Voltages Ranging from 3.3V to 36V
- 250 Watts Peak Pulse Power per Line ( $t_p = 8/20\mu s$ )
- Bidirectional Configuration & Monolithic Structure
- Protection for 1 Line
- RoHS Compliant
- REACH Compliant

### APPLICATIONS

- Cellular Phones
- MCM Boards
- Wireless Communication Circuits
- IR LEDs
- SMART & PCMCIA Cards

### MECHANICAL CHARACTERISTICS

- Molded DFN-2 Package Configuration
- Approximate Weight: 0.73 milligrams
- Lead-Free Plating
- Solder Reflow Temperature:
  - Lead-Free - Sn/Ag/Cu, 96/3.5/0.5: 260-270°C
- Flammability Rating UL 94V-0
- 8mm Tape per EIA Standard 481

### CIRCUIT DIAGRAM



**TYPICAL DEVICE CHARACTERISTICS**
**MAXIMUM RATINGS @ 25°C Unless Otherwise Specified**

PARAMETER	SYMBOL	VALUE	UNITS
Peak Pulse Power (tp = 8/20μs) - See Figure 1	$P_{PP}$	250	Watts
Operating Temperature	$T_A$	-55 to 150	°C
Storage Temperature	$T_{STG}$	-55 to 150	°C

**ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified**


PART NUMBER (Note 1)	DEVICE MARKING	RATED STAND-OFF VOLTAGE  $V_{WM}$ VOLTS	MINIMUM BREAKDOWN VOLTAGE  @ 1mA $V_{(BR)}$ VOLTS	MAXIMUM CLAMPING VOLTAGE (Fig. 2)  @ $I_p = 1A$ $V_C$ VOLTS	MAXIMUM CLAMPING VOLTAGE (Fig. 2)  @ 8/20μS $V_C @ I_{PP}$	MAXIMUM LEAKAGE CURRENT (Note 2)  @ $V_{WM}$ $I_D$ μA	TYPICAL CAPACITANCE  @ 0V, 1MHz C pF
PKFC3.3C	03	3.3	4.0	7.0	12.5V @ 20A	75*	150
PKFC05C	05	5.0	6.0	11.0	14.7V @ 17A	10**	100
PKFC08C	08	8.0	8.5	13.2	19.2V @ 13A	10***	75
PKFC12C	12	12.0	13.3	19.8	29.7V @ 9A	1	50
PKFC15C	15	15.0	16.7	25.4	35.7V @ 7A	1	40
PKFC24C	24	24.0	26.7	37.2	55.0V @ 5A	1	30
PKFC36C	36	36.0	40.0	70.0	84.0V @ 3A	1	25

**NOTES**


- All devices are bidirectional. Electrical characteristics apply in both directions.
- \*Maximum leakage current < 5μA @ 2.8V. \*\*Maximum leakage current < 500nA @ 3.3V. \*\*\*Maximum leakage current < 200nA @ 5V.

**TYPICAL DEVICE CHARACTERISTICS**


**FIGURE 1**  
**PEAK PULSE POWER VS PULSE TIME**

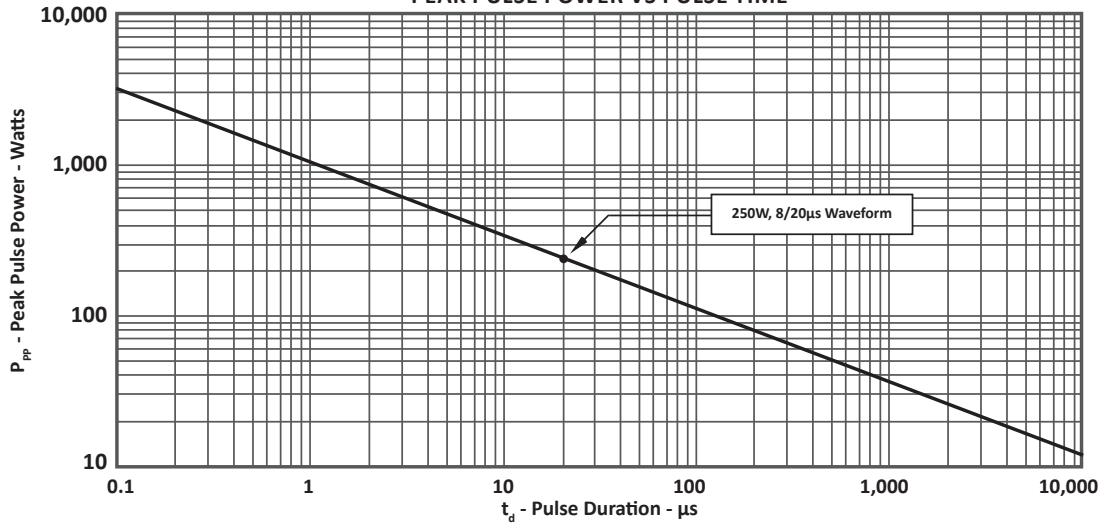

**FIGURE 2**  
**PULSE WAVE FORM**

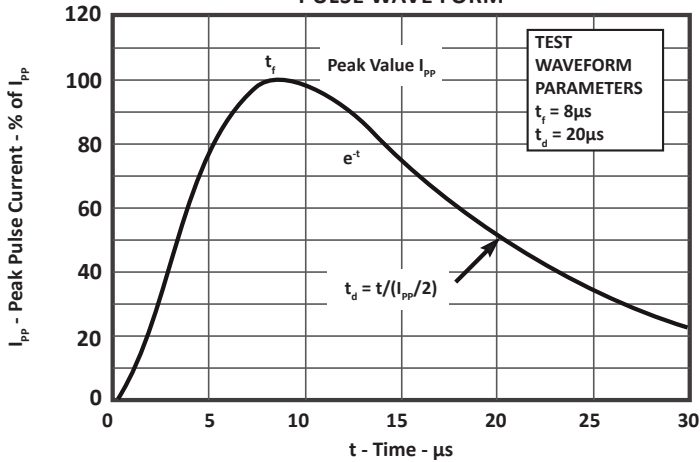

**FIGURE 3**  
**POWER DERATING CURVE**

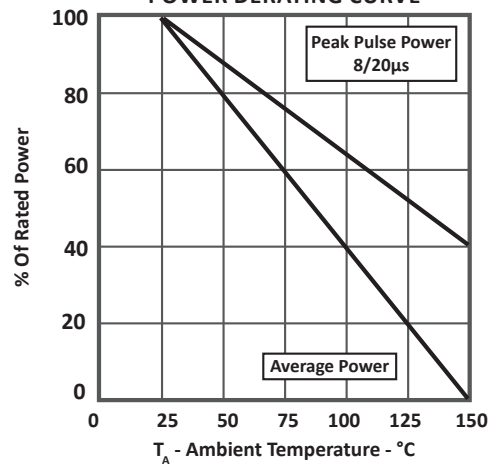

## TYPICAL DEVICE CHARACTERISTICS

FIGURE 4  
OVERSHOOT & CLAMPING VOLTAGE FOR PKFC05C


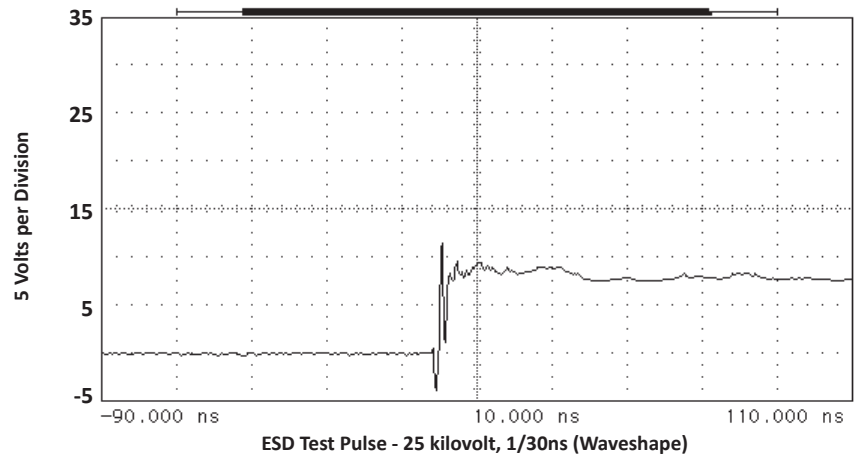


FIGURE 5  
TYPICAL CLAMPING VOLTAGE VS PEAK PULSE CURRENT PKFC05C

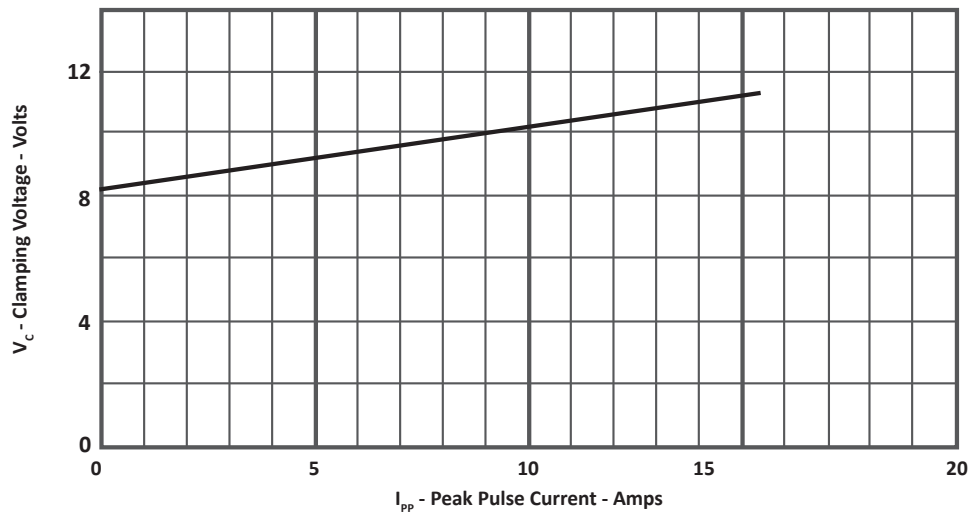


## DFN-2 PACKAGE INFORMATION

## OUTLINE DIMENSIONS

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	0.73	0.79	0.029	0.031
B	1.22	1.32	0.048	0.052
C	0.73	0.79	0.029	0.031
D	0.54	0.60	0.021	0.024
F	0.55	0.61	0.022	0.024
G	0.27	0.33	0.11	0.013
H	0.38	0.44	0.015	0.017
J	0.35	0.041	0.014	0.016
K	0.35	0.041	0.014	0.016

## NOTES

- Controlling dimensions in inches.
- Maximum size 0.052" (1.321mm) by 0.036" (0.914mm)
- All dimensions  $\pm 0.003$ ".

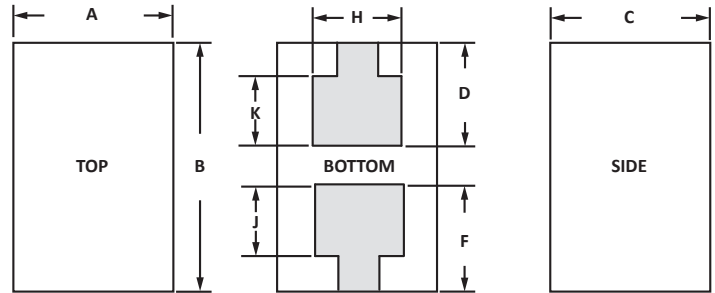


## LAYOUT DIMENSIONS


DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	1.00	1.04	0.039	0.041
B	0.62	0.66	0.024	0.026
C	1.44	1.50	0.056	0.060
E	0.18	0.22	0.007	0.009
F	0.49	0.63	0.019	0.021
G	0.31	0.035	0.012	0.014

## NOTES

- Controlling dimensions in inches.
- All dimensions  $\pm 0.003$ ".

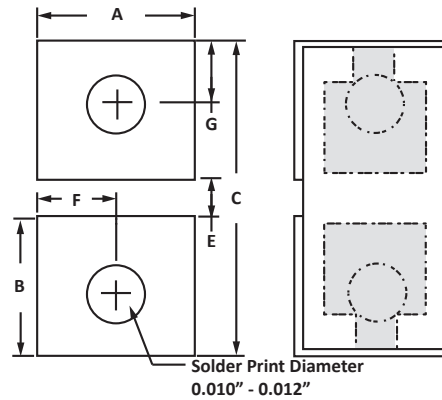

## TAPE AND REEL INFORMATION

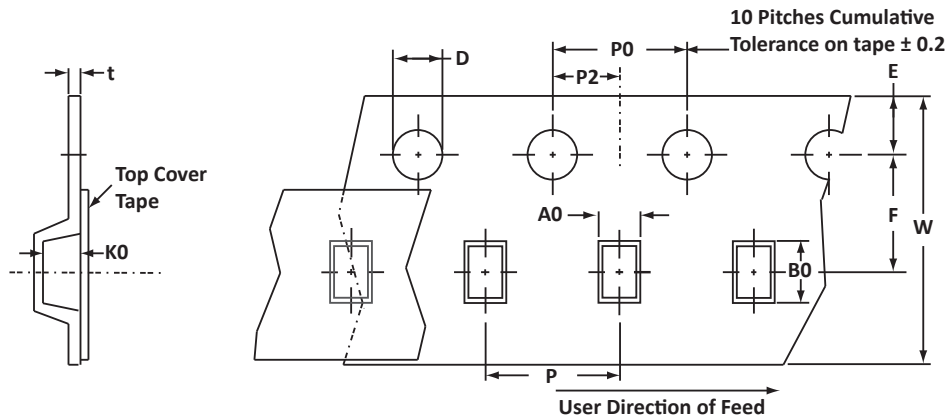

### SPECIFICATIONS

REEL DIA.	TAPE WIDTH	A0	B0	K0	D	E	F	W	P0	P2	P	Tmax
178mm(7")	8mm	0.89 ± 0.05	1.47 ± 0.10	0.81 ± 0.05	1.50 ± 0.10	1.75 ± 0.10	3.50 ± 0.05	8.00 ± 0.20	4.00 ± 0.10	2.00 ± 0.05	4.00 ± 0.10	0.25

#### NOTES

1. Dimensions in millimeters.
2. Top view of tape. Solder pads are face down in tape package.
3. Orientation: preferred stencil - 0.1mm (0.004").
4. Surface mount product is taped and reeled in accordance with EIA 481.
5. 8mm plastic tape: 7" Reels - 5,000.
6. Marking on Reel - part number, date code and lot number.

### ORDERING INFORMATION

BASE PART NUMBER (xx = Voltage)	LEADFREE SUFFIX	TAPE SUFFIX	QTY/REEL	REEL SIZE	TUBE QTY
PKFCxxC	-LF	-T75-1	5,000	7"	n/a

This device is only available in a Lead-Free configuration.

## COMPANY INFORMATION

---

### COMPANY PROFILE

In business more than 20 years, ProTek Devices™ is a privately held semiconductor company. The company offers a product line of overvoltage protection and overcurrent protection components. These include transient voltage suppressor array (TVS arrays) avalanche breakdown diode, steering diode TVS array and electronics SMD chip fuses. These components deliver circuit protection in electronic systems from numerous overvoltage and overcurrent events. They include lightning; electrostatic discharge (ESD); nuclear electromagnetic pulses (NEMP); inductive switching; and electromagnetic interference (EMI) / radio frequency interference (RFI). ProTek Devices also offers high performance interface and linear products. They include analog switches; multiplexers; LED drivers; LED wafer die for ESD protection; audio control ICs; RF and related high frequency products.

### CONTACT US

#### Corporate Headquarters

2929 South Fair Lane  
Tempe, Arizona 85282  
USA

#### By Telephone

General: 602-431-8101  
Sales: & Marketing: 602-414-5109  
Customer Service: 602-414-5114  
Product Technical Support: 602-414-5107

#### By Fax

General: 602-431-2288

#### By E-mail:

Sales: [sales@protekdevices.com](mailto:sales@protekdevices.com)  
Customer Service: [service@protekdevices.com](mailto:service@protekdevices.com)  
Technical Support: [support@protekdevices.com](mailto:support@protekdevices.com)

#### ProTek Devices (Asia Pacific) Pte. Ltd.

8 Ubi Road 2, #06-19  
Zervex  
Singapore - 408538  
Tel: +65-67488312  
Fax: +65-67488313

#### Web

[www.protekdevices.com](http://www.protekdevices.com)

COPYRIGHT © ProTek Devices 2003 - This literature is subject to all applicable copyright laws and is not for resale in any manner.

SPECIFICATIONS: ProTek reserves the right to change the electrical and or mechanical characteristics described herein without notice.

DESIGN CHANGES: ProTek reserves the right to discontinue product lines without notice and that the final judgement concerning selection and specifications is the buyer's and that in furnishing engineering and technical assistance. ProTek assumes no responsibility with respect to the selection or specifications of such products. ProTek makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ProTek assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability without limitation special, consequential or incidental damages.

LIFE SUPPORT POLICY: ProTek Devices products are not authorized for use in life support systems without written consent from the factory.

PATENT INFORMATION: Patent Pending