

P.O. Box 27
4300 AA Zierikzee
The Netherlands

Tel. +31 111 413656
Fax. +31 111 416919
www.deltapowersupplies.com




DELTA ELEKTRONIKA B.V.



EST 150 - Series 150 W Triple output DC POWER SUPPLY

Models	Voltage range	Current range
1)	0 - 20 V	0 - 2.5 A
2)	0 - 20 V	0 - 2.5 A
3)	0 - 10 V	0 - 5 A



- * 3 independent and floating outputs
- * 20 V outputs tracking or independent (switch selectable)

Features

- Very low output ripple and spikes
- EMC surpasses CE requirements: low emission & high immunity
- Excellent dynamics response to load changes
- Protected against all overload and short circuit conditions
- Designed for long time at full power

Functionalities

- 3 independent, floating outputs
- Dual voltage tracking or series tracking mode
- 3 output On / Off buttons
- Convection cooling
- Voltage and current control with 10 turn potentiometers

		10 V output	20 V outputs
Output voltage current		0 - 10 V 0 - 5 A	0 - 20 V 0 - 2.5 A
Input AC single phase, 48 - 62 Hz		90 - 265 V	
Input current @ 230 V AC		1 A	
power factor, 110 / 230 V AC full load		0.99 / 0.83	
internal fuses		4 AT	
standby input power ($V_o=I_o=0$)		12 W	
standby input power ($V_o=V_{max}$)		15 W	
Efficiency AC 230 V input, full load		81 %	
AC 110 V input, full load		78 %	
Regulation			
Load 0 - 100% CV		6 mV	5 mV
Line 90 - 265 V AC CV		0.2 mV	0.5 mV
Load 0 - 100% CC		1 mA	0.5 mA
Line 90 - 265 V AC CC		0.2 mA	0.1 mA
Ripple + noise (@ full load)			
rms (BW=300 kHz) CV		0.5 mV	0.5 mV
p-p (BW=20 MHz) CV		8 mV	8 mV
rms (BW=300 kHz) CC		0.5 mA	0.25 mA
p-p (BW=20 MHz) CC		4 mA	1 mA
Temp. coeff., per °C CV		$5 \cdot 10^{-5}$	
CC		$10 \cdot 10^{-5}$	
Stability after 1 hr warm-up during 8 hrs CV		$10 \cdot 10^{-5}$	
CC		$10 \cdot 10^{-5}$	
$t_{amb} = 25 \pm 1$ °C, $V_{in} = 230$ V AC			
Tracking accuracy		0.5 %	

Indicators (front panel)	CV-mode, CC-mode, output On/Off, Tracking On/Off
Controls (front panel)	Mains on/off, CV- and CC-potmeter, Display-Settings button, Output On/Off, Tracking On/Off

	10 V output	20 V outputs
Recovery time recovery within di/dt of load step output voltage time, @ 50 - 100% load step max. deviation @ 230 V AC input voltage	100 mV 125 mA/ms 9 V 100 ms 200 mV	50 mV 75 mA/ms 18 V 100 ms 200 mV
Output impedance CV, 0-100 kHz	< 250 mOhm	< 250 mOhm
Pulsating load max. tolerable AC component of load current f > 1 kHz f < 1 kHz	2 A rms 5 A peak	2 A rms 2.5 A peak

Insulation input / output creepage / clearance	3750 Vrms (1 min.) 8 mm
input / case output / case	2500 Vrms 600 V DC
Safety	EN 60950 / EN 61010-1 outputs are SELV
EMC Power Supply Standard	EN 61204-3, Emission: residential, light industrial environment (CISPR22-Class B) Immunity: industrial environment
Generic Emission Generic Immunity	EN 61000-6-3, residential, light industrial environment (EN 55022B) EN 61000-6-2, industrial environment
Operating Temperature at full load	– 20 to + 50 °C derate output to 75% at 60 °C
Humidity	max. 95% RH, non condensing, up to 40 °C max. 75% RH, non condensing, up to 50 °C
Storage temperature	– 40 to + 85 °C
Thermal protection	Output shuts down in case of insufficient cooling
MTBF	500 000 hrs




Hold-Up time (230 V AC input) $V_{out} = 100\%$, $I_{out} = 100\%$ $V_{out} = 85\%$, $I_{out} = 100\%$ $V_{out} = 100\%$, $I_{out} = 50\%$	25 ms 30 ms 60 ms
Turn on delay	250 ms
Inrush current	10 A (limited by an internal NTC resistor, 30 Ohms cold resistance)

	10 V output	20 V outputs
Series operation max. total voltage	600 V	
Parallel operation max. total current	no limit	
Over Voltage Limit (fixed)	max. 13 V	max. 25 V
Potentiometers front panel control with knobs resolution	standard 0.03%	
Meters scale voltage scale current accuracy V-meter accuracy A-meter	3.5 digit 0 - 10.00 V 0 - 5.00 A 0.5% + 2 digits 1% + 2 digits	3.5 digit 0 - 20.0 V 0 - 2.50 A 0.5% + 2 digits 1% + 2 digits


Input Connector	Euro-connector at rear panel 10 Amp / 65 °C IEC320/C14, EN 60320/C14
Output Terminals	4 mm safety sockets at front-panel
Cooling	Convection cooling
Enclosure degree of protection	IP20
Dimensions (h x w x d)	132 x 222 x 180 mm
Weight	3.5 kg

CV = Constant Voltage
CC = Constant Current

Specifications measured at $25 \pm 5^\circ\text{C}$ and
 $V_{in} = 230\text{ V AC}$, 50 Hz unless otherwise noted.

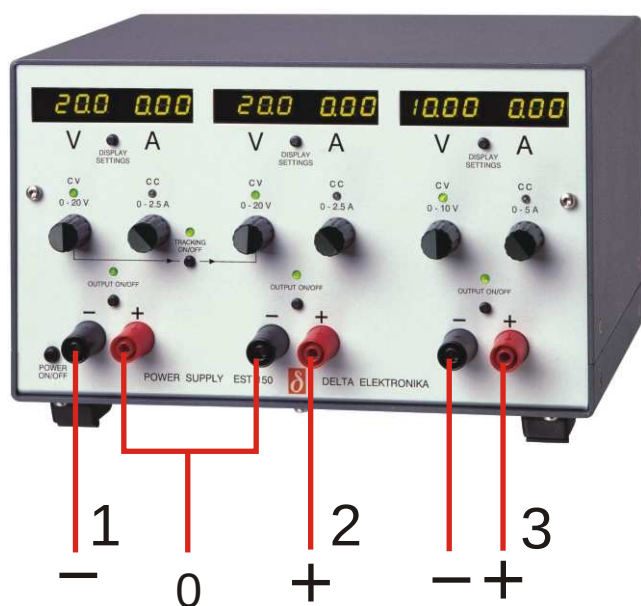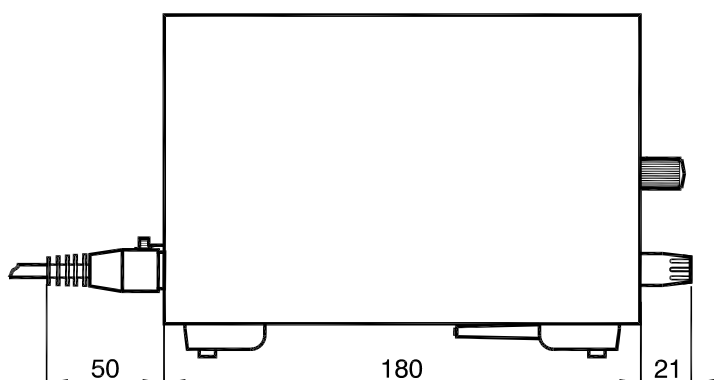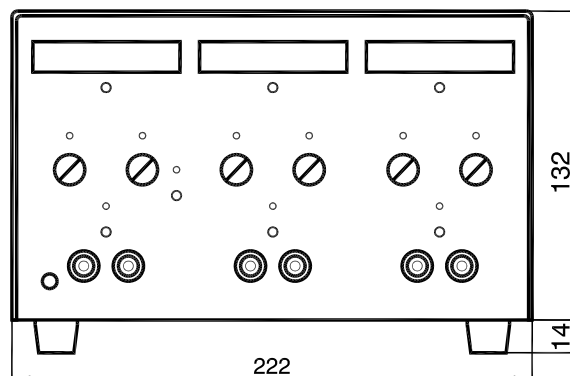

20 V Outputs in Tracking - Mode ,
to create a dual voltage source
Voltage of Output (2) follows the setting
for Output (1), current settings still independent

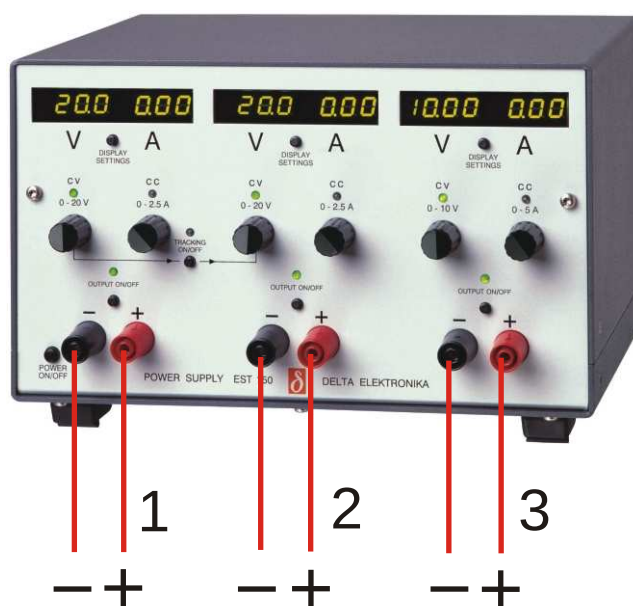

Tracking - Mode off
3 independent voltage / current sources
outputs are floating