


P.O. Box 27
4300 AA Zierikzee
The Netherlands

Tel. +31 111 413656
Fax. +31 111 416919
www.deltapowersupplies.com



DELTA ELEKTRONIKA

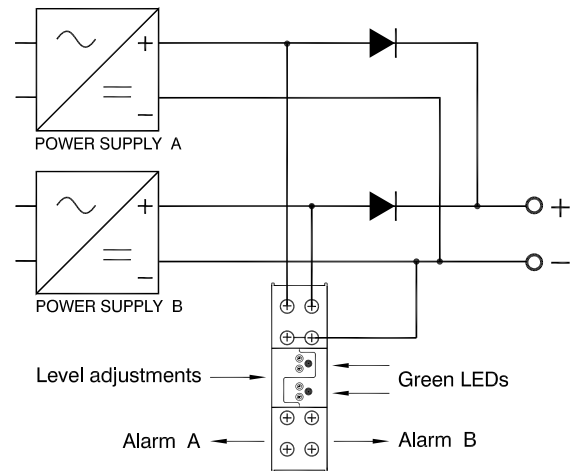

Monitoring two power supplies in redundant operation.

AL24-48 - UNDER AND OVER VOLTAGE ALARM

2 channel alarm for use from 18 VDC to 64 VDC

Features

- Large adjustment for use on both 24 VDC and 48 VDC
- Contains two window comparator circuits, isolated from each other
- Each has an isolated alarm contact
- Monitors the output voltages of two power supplies
- Between the levels of under and over voltage a green LED lights up

Specification

- Undervoltage range : 18-48 V
- Overvoltage range : 24-64 V
- Insulation between circuits : 500 V DC
- Alarm contact : 100 mA / 30 V, Normally Closed
- Ambient temperature : - 20 to + 70 °C

Dimensions

