




Product Family: [High Frequency Crossover Chip](#)

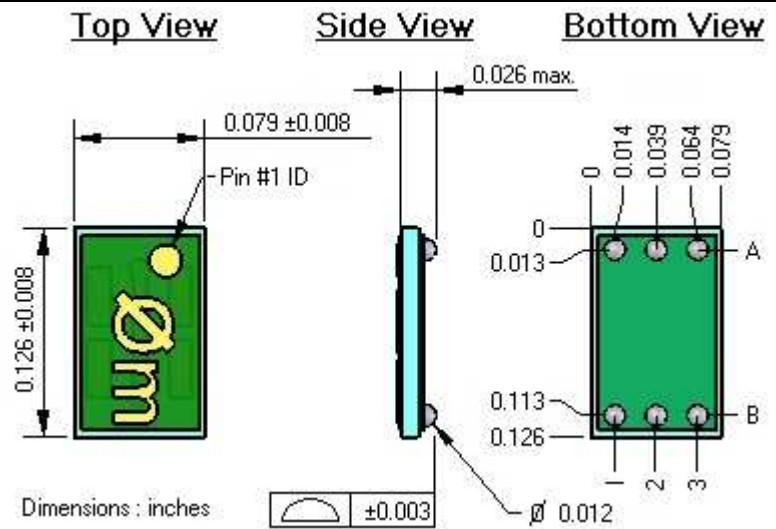
Part Number Series: [XOB1208F100S](#)

	<p>Construction:</p> <ul style="list-style-type: none"> • High purity alumina substrate • Copper micro-strip transmission line • Epoxy-resin overcoat • Lead free, RoHS (Sn96.5/Ag3.0/Cu0.5), 12mil diameter, BGA termination (Gnd-Signal-Gnd) 	<p>Features:</p> <ul style="list-style-type: none"> • Tightly controlled 50Ω impedance • High frequency bandwidth, 10GHz • BGA Gnd-Signal-Gnd termination for high frequency lead-in, lead-out • High volume production suitable for commercial and special applications • Competitive pricing
---	---	--

Description:

- **Significance:** This high frequency crossover device is a surface mount component that provides excellent signal integrity characteristics beyond 10 GHz to be achieved while allowing circuit routing transitions with traditional BGA manufacturing techniques on single layer board layouts that normally require significantly more expensive multi-layer RF and microwave PCB manufacturing or RF cabling assemblies.
- **Applications:** High frequency applications addressed by this type of device include optical to electrical modules, test instrument load boards, test instrument modules, and any other systems with signal bandwidths beyond 5GHz embedded in single layer, high frequency design environments.
- **Field Reports / Reference Customers:** Thin Film Technology has demonstrated very good high frequency component packaging with many optical module companies through 40Gbps applications. TFT utilizes simulation techniques and also capitalizes on the advantages of thin film construction to realize high performance electrical components. These devices are realized using high performance service for your design support including fast turn custom prototypes to full production capacity, start to finish.

Product Dimensions:

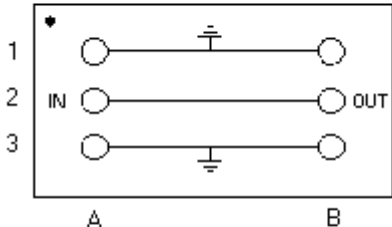
 <p>Dimensions : inches</p>	<table border="1"> <thead> <tr> <th>Item</th> <th>Specification</th> </tr> </thead> <tbody> <tr> <td>Package Size</td> <td>1208 English (3220 Metric)</td> </tr> <tr> <td>Solder Ball Composition</td> <td>RoHS compliant (Pb Free) 96.5% Sn / 3.0% Ag / 0.5% Cu</td> </tr> <tr> <td>Passivation</td> <td>Top and bottom sides</td> </tr> <tr> <td>Marking</td> <td>Pin #1 identified, TFT "Don't Stop" logo, Manufacturing Code</td> </tr> <tr> <td>Pin #1 Identifier</td> <td>Corner of Pin # A1</td> </tr> </tbody> </table> <p>Note: To ensure high frequency performance, reference the suggested footprint shown on the next page.</p>	Item	Specification	Package Size	1208 English (3220 Metric)	Solder Ball Composition	RoHS compliant (Pb Free) 96.5% Sn / 3.0% Ag / 0.5% Cu	Passivation	Top and bottom sides	Marking	Pin #1 identified, TFT "Don't Stop" logo, Manufacturing Code	Pin #1 Identifier	Corner of Pin # A1
Item	Specification												
Package Size	1208 English (3220 Metric)												
Solder Ball Composition	RoHS compliant (Pb Free) 96.5% Sn / 3.0% Ag / 0.5% Cu												
Passivation	Top and bottom sides												
Marking	Pin #1 identified, TFT "Don't Stop" logo, Manufacturing Code												
Pin #1 Identifier	Corner of Pin # A1												

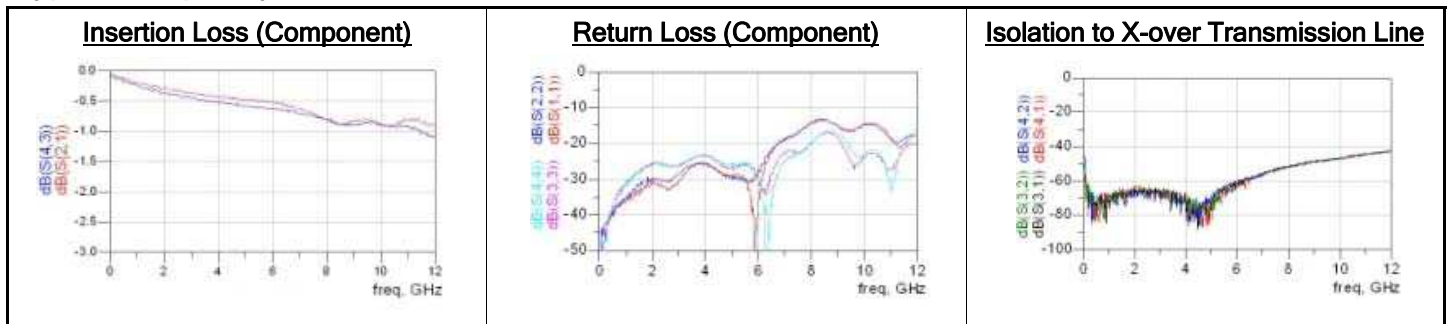
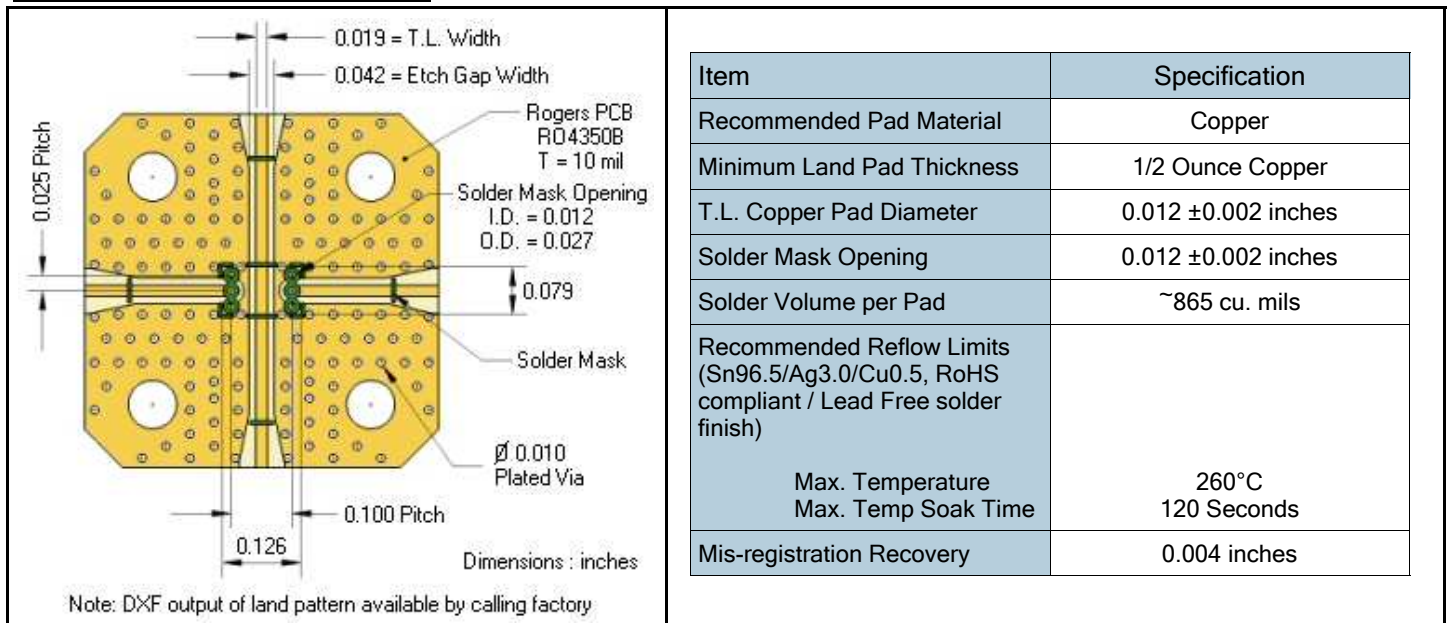
Part Numbering: XO02M610.01-XOB1208F100S*

Product Designator	Electrode Type	English Size (Metric Size)	Number of Electrodes	Frequency Performance	Custom Code	Packaging Qty*
XO	B = Ball Grid Array	1208 (3220)	F = 6 balls	100 = 10.0 GHz	S = Standard	-T1 = 100 pcs/reel -T5 = 500 pcs/reel

*Note: T&R package quantity (-T##) will be appended by us to the end of the part number. Refer to the following page for standard package sizes.

Electrical Specifications & Schematic:

Part Number	XOB1208F100S*	Schematic
Construction Type	Transmission line structure	<p>Input = A2 : Output = B2 (all other pins ground)</p>  <p>Notes: 1) Top view (BGA grid facing down) 2) Gnd-Signal-Gnd BGA Configuration</p>
Characteristic Impedance	50Ω ± 5%	
Bandwidth (defined by insertion loss)	DC to 10GHz < 1dB insertion loss	
Return Loss	DC to 5GHz <20dB 5 to 10GHz <12dB	
Isolation to Crossover Transmission Line	DC to 6GHz <40dB 6 to 10GHz <30dB	
Rise Time	< 100ps	
DC Resistance	0.5Ω max.	
Rated Current	100 mA	
Isolation Resistance to Package Ground Plane	> 100 MΩ @ 50Vdc	
Operating Temperature	-40°C to 125°C	
Storage Temperature	-55°C to 155°C	
Packaging (tape & reel)	100 pcs/reel (T1) or 500 pcs/reel (T5)	

Typical Frequency Characteristics:**Recommended Land Pattern:**

- Notes:
- Using the above land pattern and test board produced the frequency performance shown in the above plots.
 - Deviation from this recommended footprint could affect the frequency performance of this device.