

**Product NPW-RSZ will be discontinued.**

**Product Discontinuation Notice Issued on 03 Apr 2013**

### **SPNova™**

Featuring a staggering brilliance and significant flux output, the SPNova™ showcases the latest technological advent in this range. With its extremely high level of brightness and the ultra low high profile, which is only 1.5 mm are highly suitable for both conventional lighting and specialized application such as automotive signal lights, traffic lights, channel lights, tube lights and garden lights among others.

### **Features:**

- > Super high brightness surface mount LED.
- > High flux output; typical 85 lumens.
- > 135° viewing angle.
- > Compact package outline (LxWxH) of 6.0 x 6.0 x 1.5mm.
- > Ultra low height profile - 1.5 mm.
- > Designed for high current drive; rated at 350 mA.
- > Low thermal resistance;  $R_{th}(js) = 10 \text{ K/W}$ .
- > Qualified according to JEDEC moisture sensitivity Level 2.
- > Compatible to IR reflow soldering.
- > Environmental friendly; RoHS compliance.

### **Applications:**

- > Lighting: garden light, architecture lighting, general lighting. etc
- > Backlighting (TFT LCD display), flash light, architectural lighting.



## Optical Characteristics at Tj=25°C

| Part Ordering Number | Color | Viewing Angle° | Luminous Flux @ IF = 350mA (lm) |      |       |
|----------------------|-------|----------------|---------------------------------|------|-------|
|                      |       |                | Min.                            | Typ. | Max.  |
| NPW-RSZ-TU-1         | White | 135            | 67.2                            | 85.0 | 113.6 |

### NOTE

1. Luminous flux is measured with an accuracy of  $\pm 11\%$ .
2. Luminous flux is measured with a 25 ms pulse.
2. Wavelength binning is carried for all units as per the wavelength-binning table. Only one wavelength group is allowed for each reel.

## Electrical Characteristics at Tj=25°C


| Part Number | Vf @ If = 350mA |          |          |
|-------------|-----------------|----------|----------|
|             | Min. (V)        | Typ. (V) | Max. (V) |
| NPW-RSZ     | 3.0             | 3.5      | 4.0      |

Forward voltage are measure using a current pulse of 1 ms and with an accuracy of  $\pm 0.1V$ .

## Absolute Maximum Ratings

|                          | Maximum Value                 | Unit |
|--------------------------|-------------------------------|------|
| DC forward current       | 350                           | mA   |
| Peak pulse current       | 500                           | mA   |
| Reverse Voltage          | Not designed for reverse bias | V    |
| ESD threshold (HBM)      | 2000                          | V    |
| LED junction temperature | 150                           | °C   |
| Operating temperature    | -40 ... +100                  | °C   |
| Storage temperature      | -40 ... +100                  | °C   |

## Color Bin - Cool White

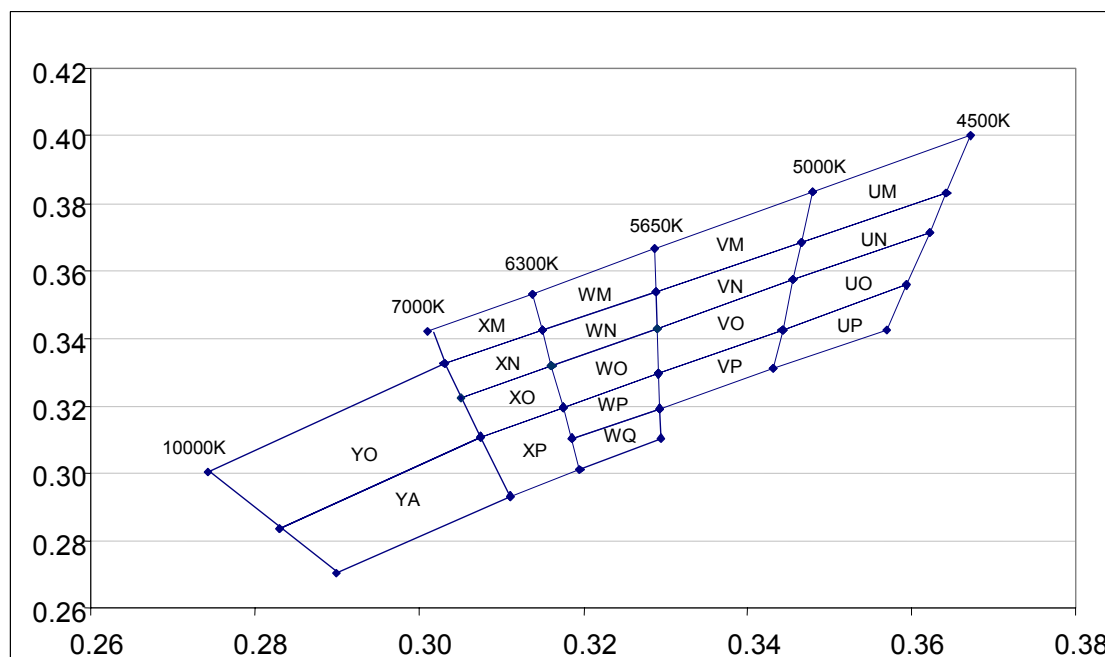

Chromaticity coordinate groups are measured with an accuracy of  $\pm 0.01$ .

| Bin |    | 1     | 2     | 3     | 4     |
|-----|----|-------|-------|-------|-------|
| YO  | Cx | 0.274 | 0.303 | 0.308 | 0.283 |
|     | Cy | 0.301 | 0.333 | 0.311 | 0.284 |
| YA  | Cx | 0.283 | 0.308 | 0.311 | 0.290 |
|     | Cy | 0.284 | 0.311 | 0.293 | 0.270 |
| XM  | Cx | 0.301 | 0.314 | 0.315 | 0.303 |
|     | Cy | 0.342 | 0.353 | 0.343 | 0.333 |
| XN  | Cx | 0.303 | 0.315 | 0.316 | 0.305 |
|     | Cy | 0.333 | 0.343 | 0.332 | 0.322 |
| XO  | Cx | 0.305 | 0.316 | 0.318 | 0.308 |
|     | Cy | 0.322 | 0.332 | 0.319 | 0.311 |
| XP  | Cx | 0.308 | 0.318 | 0.320 | 0.311 |
|     | Cy | 0.311 | 0.319 | 0.301 | 0.293 |
| WM  | Cx | 0.314 | 0.329 | 0.329 | 0.315 |
|     | Cy | 0.353 | 0.366 | 0.354 | 0.343 |
| WN  | Cx | 0.315 | 0.329 | 0.329 | 0.316 |
|     | Cy | 0.343 | 0.354 | 0.343 | 0.332 |
| WO  | Cx | 0.316 | 0.329 | 0.329 | 0.318 |
|     | Cy | 0.332 | 0.343 | 0.330 | 0.319 |
| WP  | Cx | 0.318 | 0.329 | 0.329 | 0.319 |
|     | Cy | 0.319 | 0.330 | 0.319 | 0.310 |
| WQ  | Cx | 0.319 | 0.329 | 0.330 | 0.320 |
|     | Cy | 0.310 | 0.319 | 0.311 | 0.301 |
| VM  | Cx | 0.329 | 0.348 | 0.347 | 0.329 |
|     | Cy | 0.366 | 0.383 | 0.368 | 0.354 |


| Bin |    | 1     | 2     | 3     | 4     |
|-----|----|-------|-------|-------|-------|
| VN  | Cx | 0.329 | 0.347 | 0.346 | 0.329 |
|     | Cy | 0.354 | 0.368 | 0.357 | 0.343 |
| VO  | Cx | 0.329 | 0.346 | 0.344 | 0.329 |
|     | Cy | 0.343 | 0.357 | 0.343 | 0.330 |
| VP  | Cx | 0.329 | 0.344 | 0.343 | 0.329 |
|     | Cy | 0.330 | 0.343 | 0.331 | 0.319 |
| UM  | Cx | 0.348 | 0.367 | 0.364 | 0.347 |
|     | Cy | 0.383 | 0.400 | 0.383 | 0.368 |
| UN  | Cx | 0.347 | 0.364 | 0.362 | 0.346 |
|     | Cy | 0.368 | 0.383 | 0.372 | 0.357 |
| UO  | Cx | 0.346 | 0.362 | 0.359 | 0.344 |
|     | Cy | 0.357 | 0.372 | 0.356 | 0.343 |
| UP  | Cx | 0.344 | 0.359 | 0.357 | 0.343 |
|     | Cy | 0.343 | 0.356 | 0.343 | 0.331 |

### Luminous Flux Group at Tj=25°C


| Brightness Group | Luminous Flux (lm) |
|------------------|--------------------|
| T2               | 67.2...76.5        |
| T3               | 76.5...87.4        |
| U2               | 87.4...99.4        |
| U3               | 99.4...113.6       |

Luminous flux is measured with an accuracy of  $\pm 11\%$ .


**Relative Intensity Vs Forward Current**

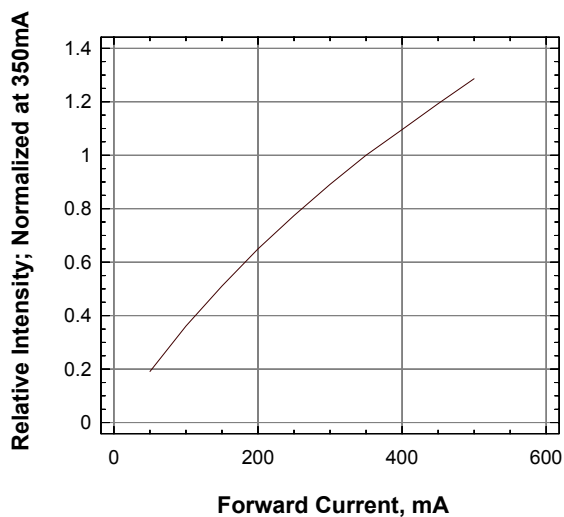


**Relative Flux Vs Forward Current**

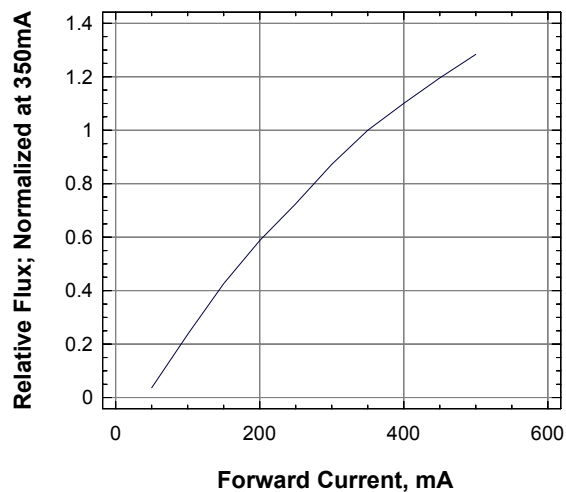


**Forward Current Vs Forward Voltage**

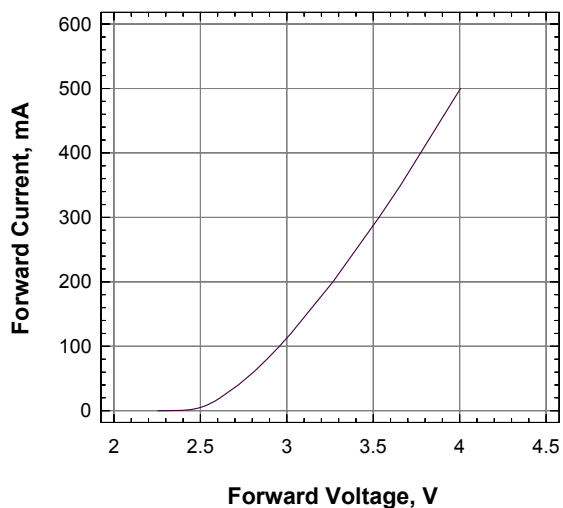


**Relative Spectral Emission**

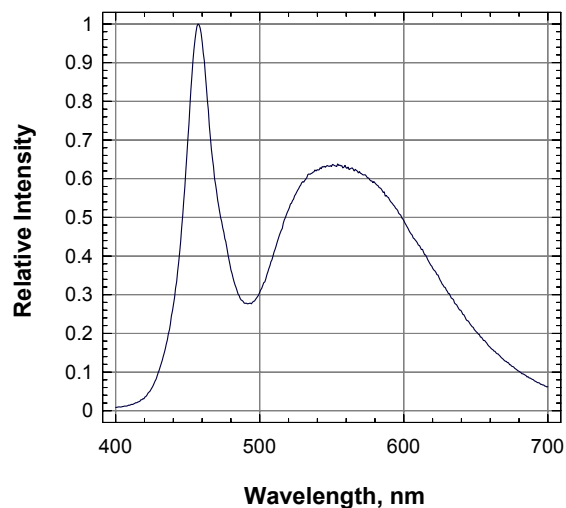


**Forward Current Vs Ambient Temperature (Rja=40K/W)**

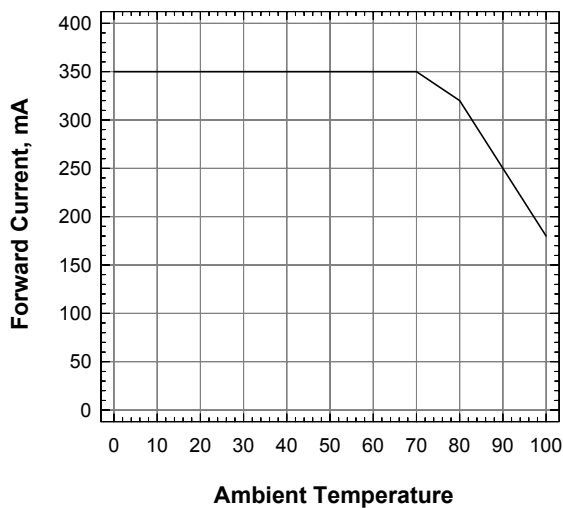

**Radiation Pattern**

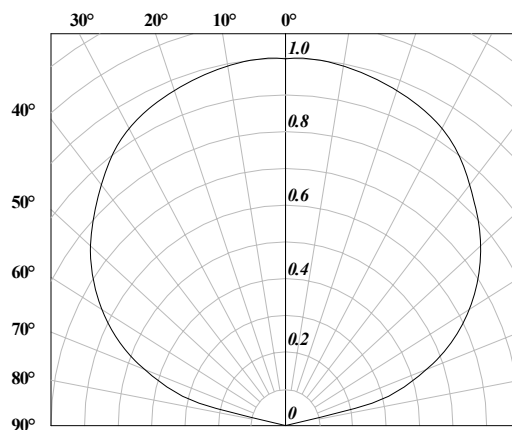

**SPNova™ • InGaN White : NPW-RSZ Package Outlines**

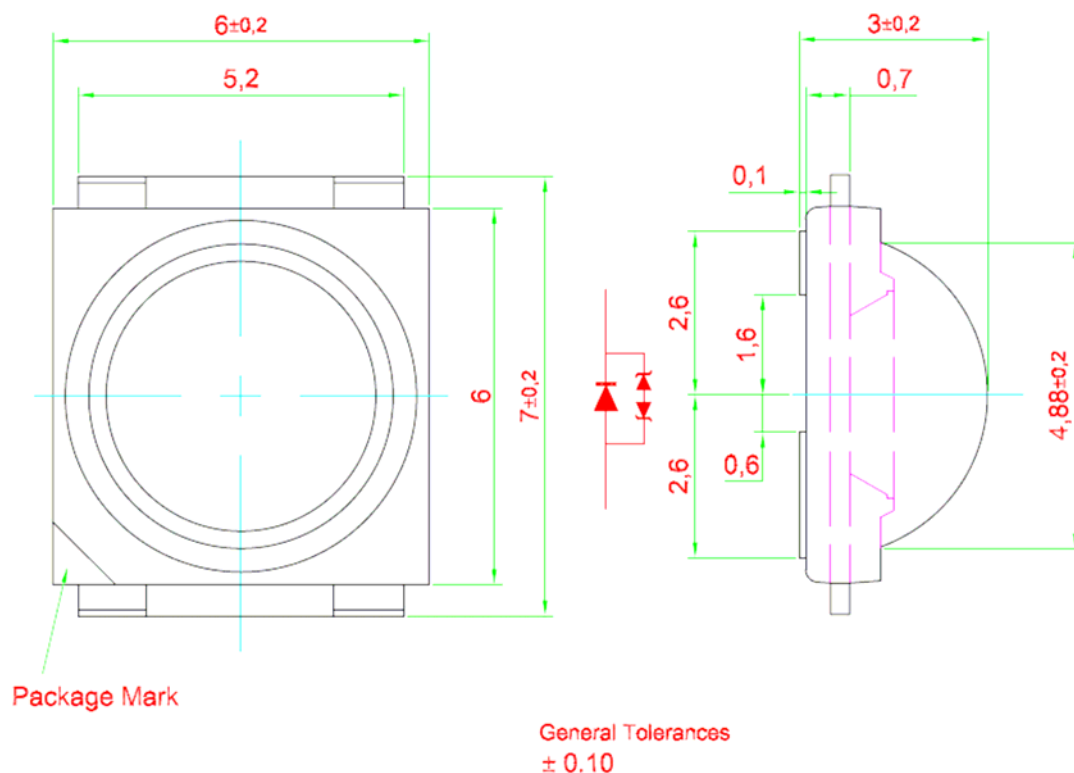


**Material**

| Material        |                                         |
|-----------------|-----------------------------------------|
| Lead-frame      | Cu Alloy With Ag Plating                |
| Package         | High Temperature Resistant Plastic, PPA |
| Encapsulant     | Silicone Resin                          |
| Soldering Leads | Sn-Sn Plating                           |


## Solder Pad Design

Note: Metal core circuit board (MCPCB) is highly recommended for applications.  
Please consult sales and marketing for additional information.

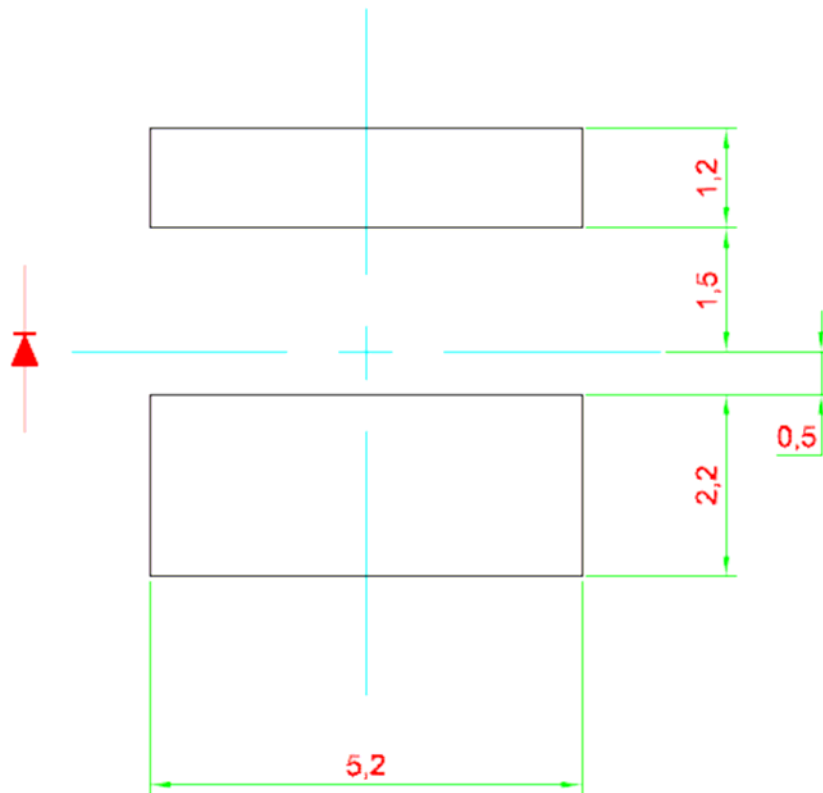


## Taping and orientation

- Reels come in quantity of 2000 units.
- Reel diameter is 330 mm.

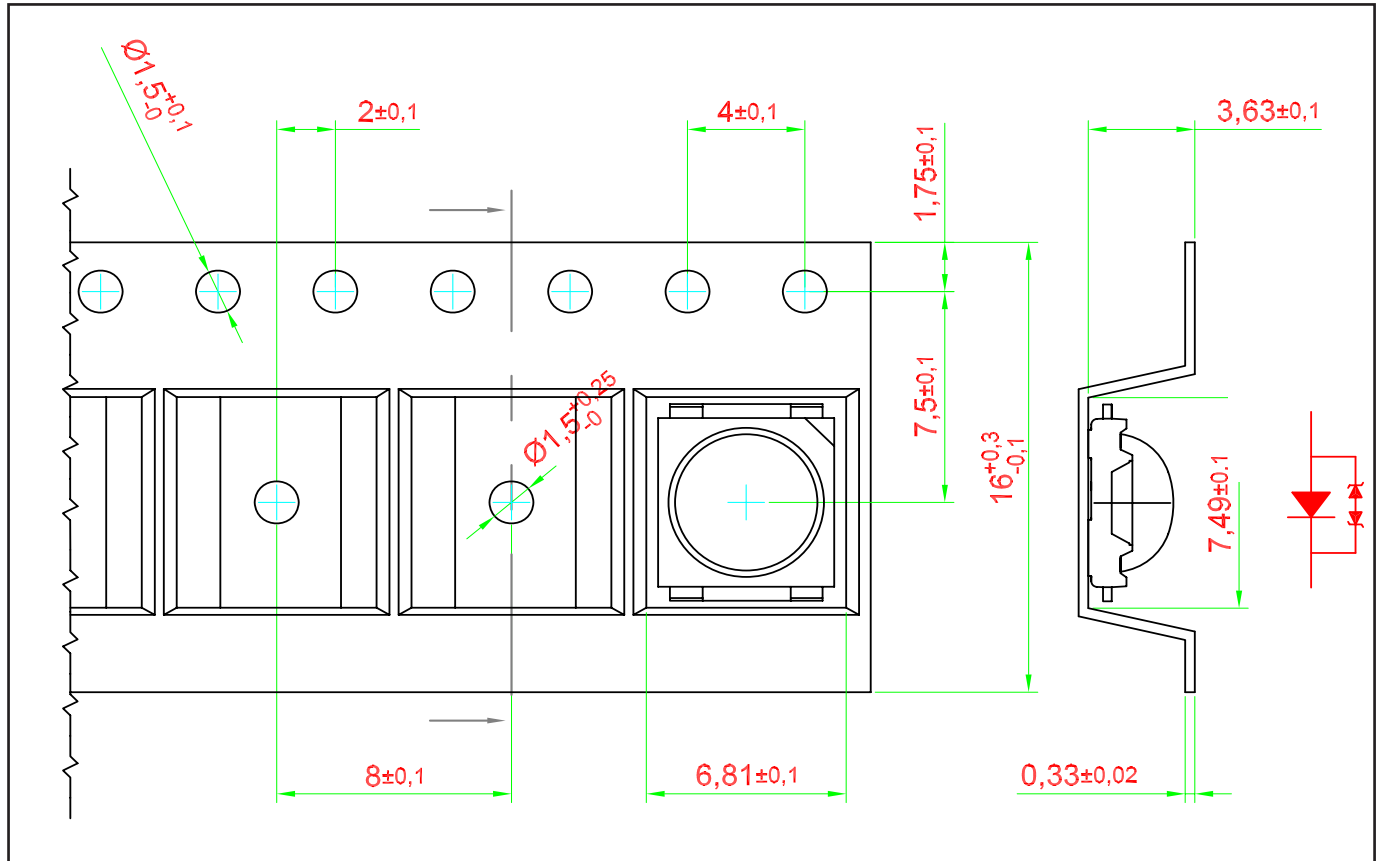





## Packaging Specification

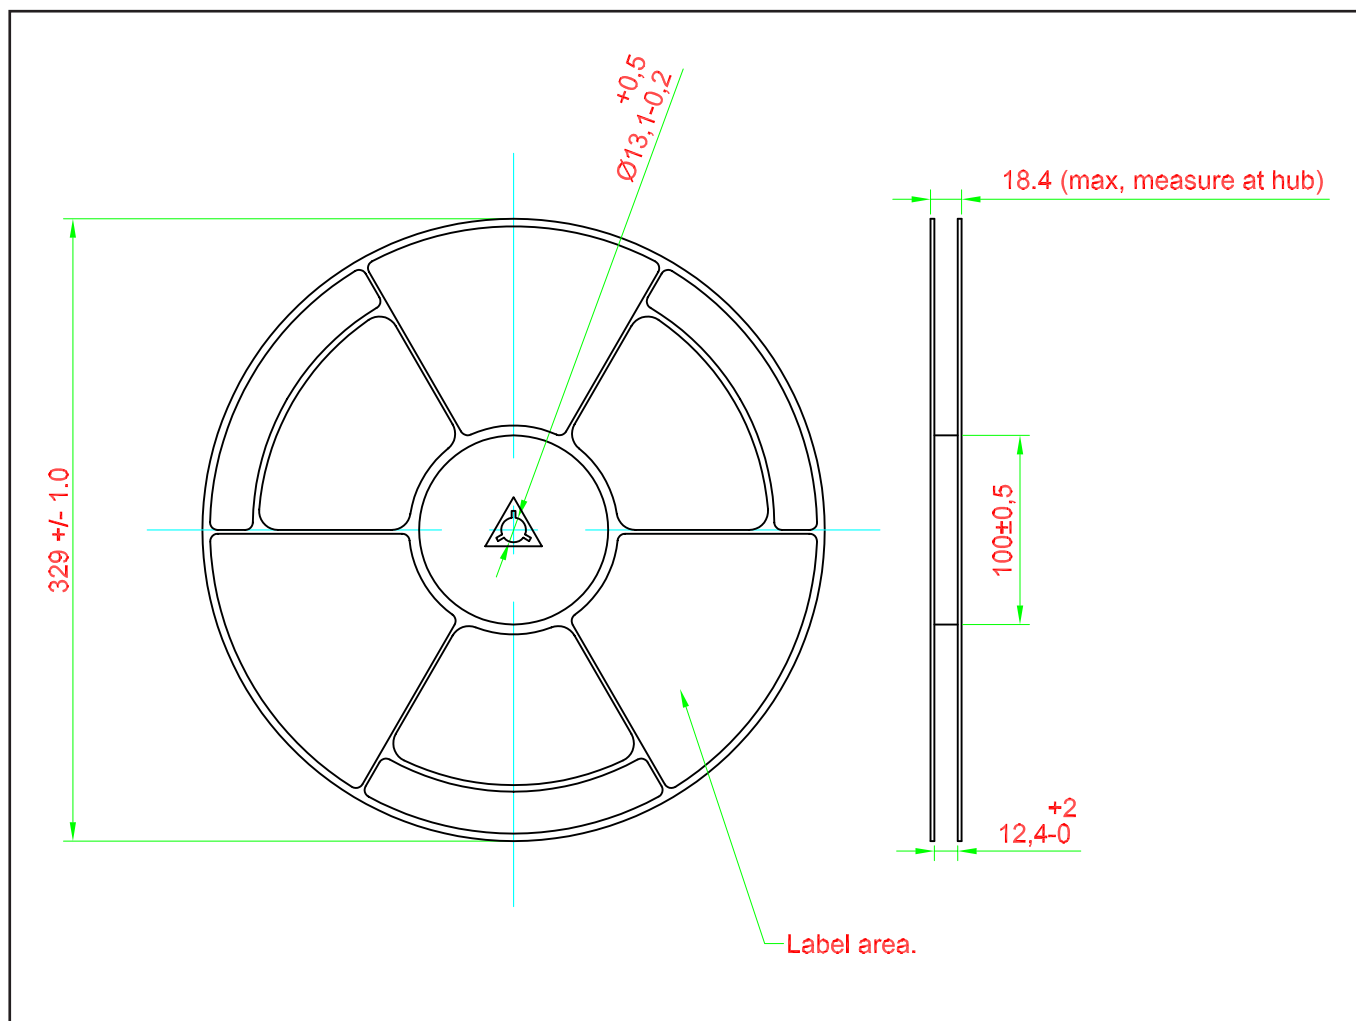

## Packaging Specification

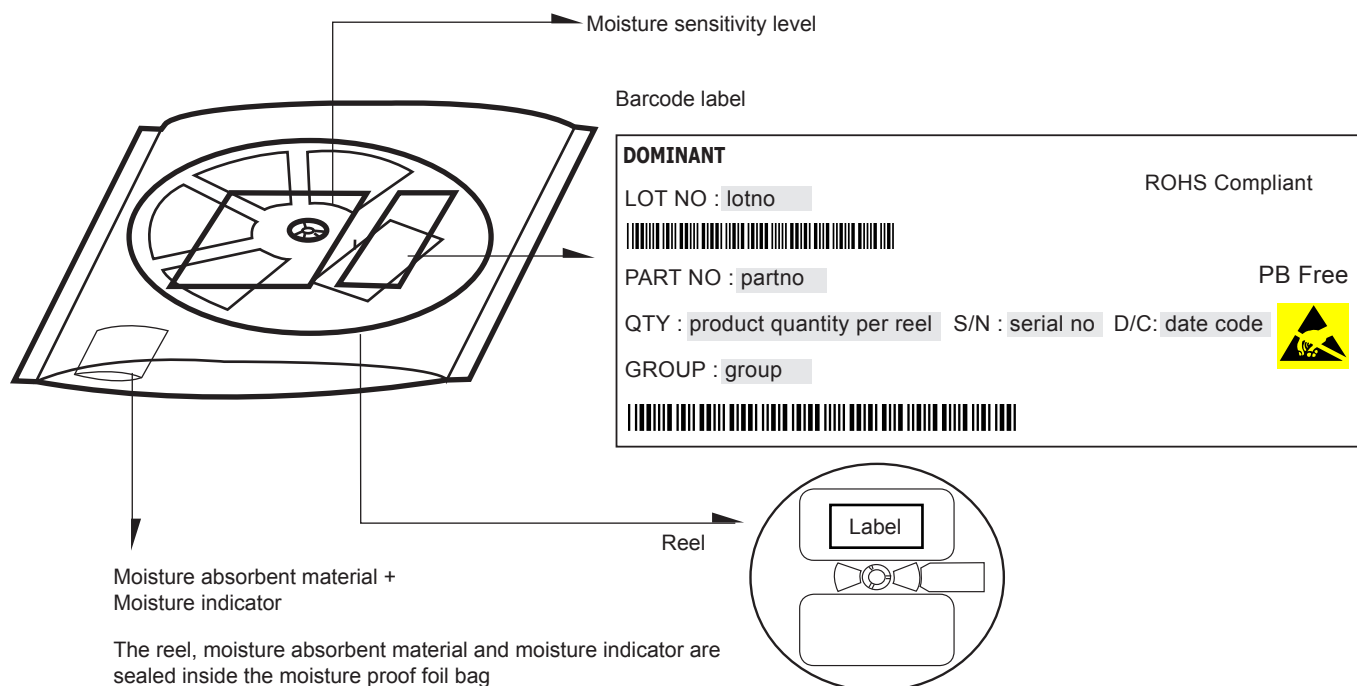


|               | Average 1pc SPNova | 1 completed bag (2000pcs) |
|---------------|--------------------|---------------------------|
| Weight (gram) | 0.188              | 800 ± 10                  |

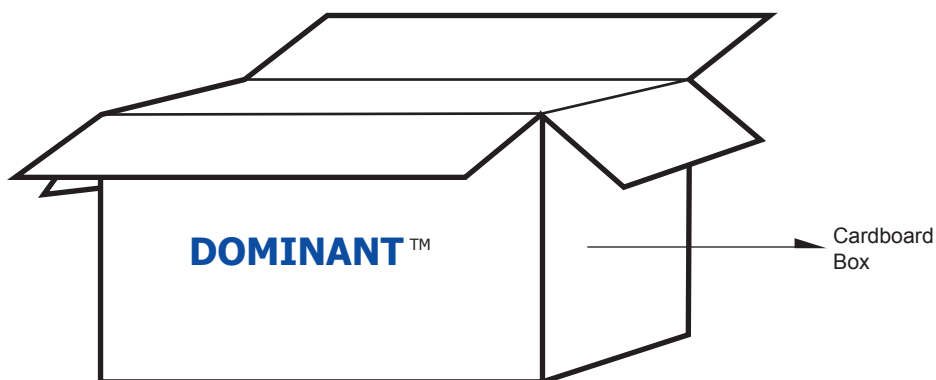


### For SPNova<sup>M</sup>

| Cardboard Box Size | Dimensions (mm) | Empty Box Weight (kg) | Reel / Box   | Quantity / Box (pcs) |
|--------------------|-----------------|-----------------------|--------------|----------------------|
| Large              | 416 x 516 x 476 | 1.74                  | 20 reels MAX | 40,000 MAX           |

## Recommended Sn-Pb IR-Reflow Soldering Profile

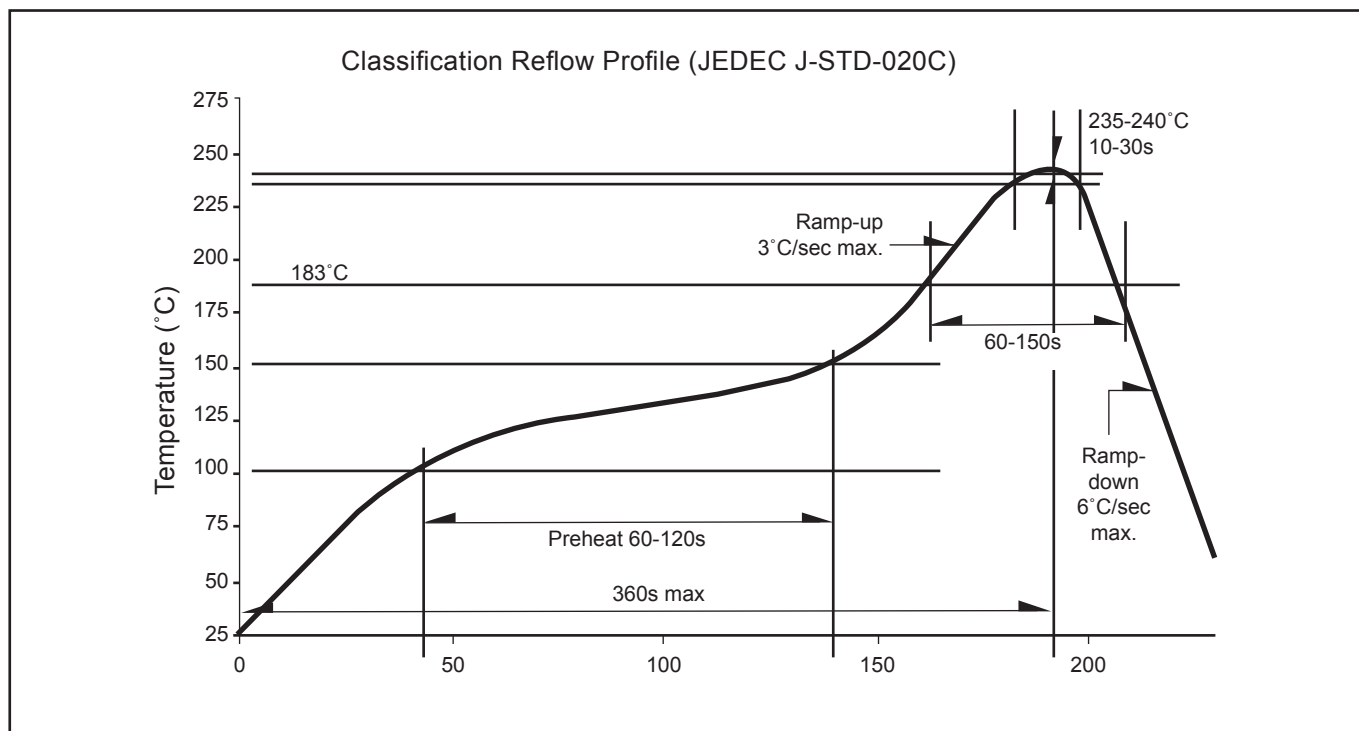

## Recommended Pb-free Soldering Profile

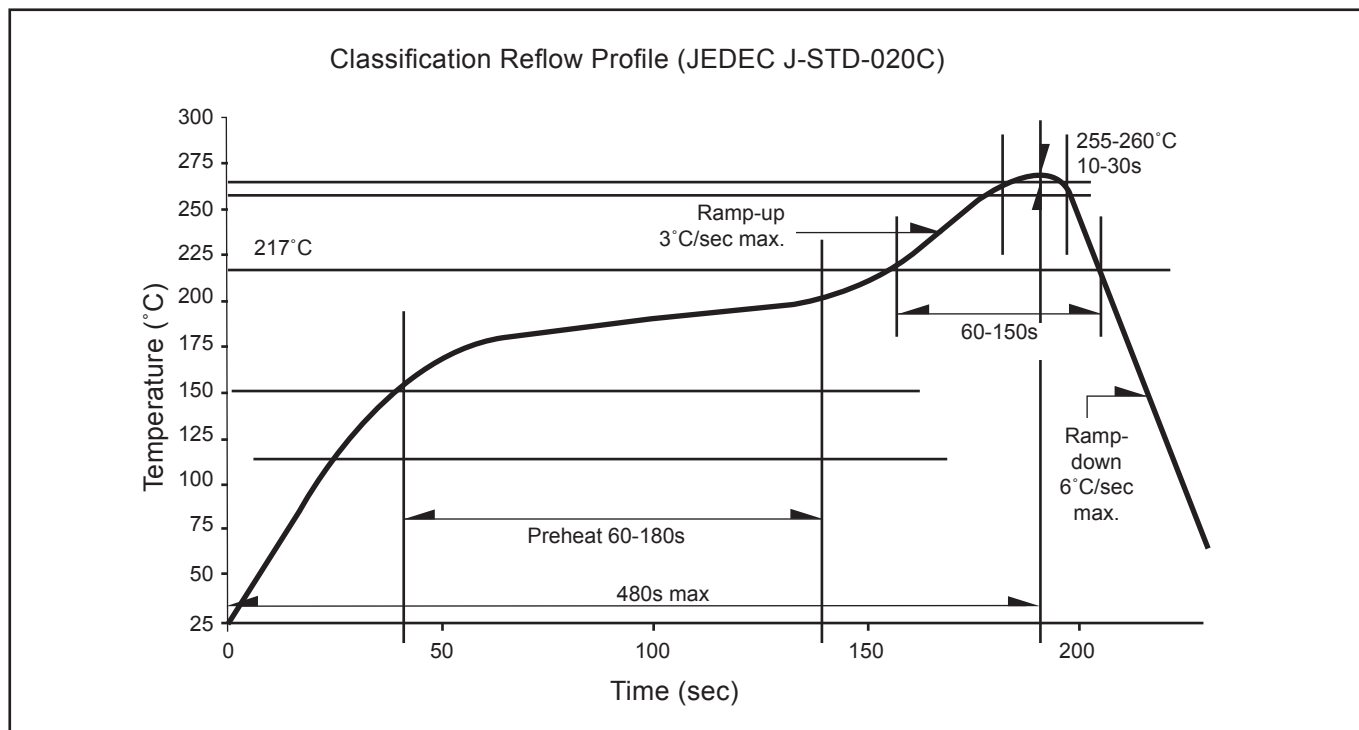

## Revision History

| Page | Subjects                 | Date of Modification |
|------|--------------------------|----------------------|
| -    | Initial Release          | 09 Feb 2009          |
| 5    | Update Radiation Pattern | 16 Jul 2009          |
| -    | Update company name      | 05 Apr 2010          |
| -    | Correction SPNova        | 07 Jul 2011          |
|      |                          |                      |
|      |                          |                      |
|      |                          |                      |
|      |                          |                      |
|      |                          |                      |
|      |                          |                      |
|      |                          |                      |

## NOTE

All the information contained in this document is considered to be reliable at the time of publishing. However, DOMINANT Opto Technologies does not assume any liability arising out of the application or use of any product described herein.

DOMINANT Opto Technologies reserves the right to make changes to any products in order to improve reliability, function or design.

DOMINANT Opto Technologies products are not authorized for use as critical components in life support devices or systems without the express written approval from the Managing Director of DOMINANT Opto Technologies.

## About Us

DOMINANT Opto Technologies is a dynamic Malaysian Corporation that is among the world's leading SMT LED Manufacturers. An excellence – driven organization, it offers a comprehensive product range for diverse industries and applications. Featuring an internationally certified quality assurance acclaim, DOMINANT's extra bright LEDs are perfectly suited for various lighting applications in the automotive, consumer and communications as well as industrial sectors. With extensive industry experience and relentless pursuit of innovation, DOMINANT's state-of-art manufacturing, research and testing capabilities have become a trusted and reliable brand across the globe. More information about DOMINANT Opto Technologies can be found on the Internet at <http://www.dominant-semi.com>.

### **Please contact us for more information:**

#### Head Quarter

DOMINANT Opto Technologies Sdn. Bhd.  
Lot 6, Batu Berendam, FTZ Phase III, 75350 Melaka, Malaysia  
Tel: (606) 283 3566 Fax: (606) 283 0566  
E-mail: [sales@dominant-semi.com](mailto:sales@dominant-semi.com)

#### DOMINANT Opto Technologies Sdn. Bhd. Shanghai Representative Office

Room 305, No 1600 Zhong Shan Road (W), Shanghai, 200235 P. R. China  
Tel: +86 21 6428 6428 Fax: +86 21 6428 6880  
E-mail: [sales\\_china@dominant-semi.com](mailto:sales_china@dominant-semi.com)

#### DOMINANT Korea Sales Office

DOMINANT Semiconductors Korea Inc.  
RM 211 SUNTEAK CITY APT. 513-15 Sangdaewon-dong, Jungwon-gu, Seongnam-si, Gyeonggi-do, 462-725, Korea  
Tel: +82-31-701-5203 Fax: +82-31-701-5204  
E-mail: [sales\\_korea@dominant-semi.com](mailto:sales_korea@dominant-semi.com)

#### DOMINANT U.S.A Sales Office

25 Rockaway Road, 08833 Lebanon, New Jersey, USA  
Tel: (908) 439-9930 Cell: (908) 343-5810 Fax: (908) 439-9929  
E-mail: [don.wendel@dominant-semi.com](mailto:don.wendel@dominant-semi.com)

#### DOMINANT Europe Sales Office

DOMINANT Semiconductors Europe GmbH  
Raiffeisenstr. 38, 74906 Bad Rappenau Germany  
Tel: +49 (0) 7264-89010-10 / +49 (0) 7264-89010-11 Cell: +49 173-6907370 / +49 173-6907751  
Fax: +49 (0) 7264-89010-29  
E-mail: [gerd.wachno@dominant-semi.eu](mailto:gerd.wachno@dominant-semi.eu); [hartmut.wettengl@dominant-semi.eu](mailto:hartmut.wettengl@dominant-semi.eu)

#### DOMINANT India Sales Office

C-11,Vasanth Business Centre #86, TTK Road, Alwarpet Chennai - 600 018, INDIA  
Tel: 91-44-42030616 / 516 Cell: 91-9444920537 Fax: 91-9444920616  
E-mail: [pravat.behera@dominant-semi.com](mailto:pravat.behera@dominant-semi.com)

