


SPNova™

Featuring a staggering brilliance and significant flux output, the SPNova™ showcases the latest technological advent in this range. With its extremely high level of brightness and the ultra low high profile, which is only 1.5 mm are highly suitable for both conventional lighting and specialized application such as automotive signal lights, traffic lights, channel lights, tube lights and garden lights among others.



Features:

- > Super high brightness surface mount LED.
- > High flux output; typical 70 lumens
- > 120° viewing angle.
- > Compact package outline (LxWxH) of 6.0 x 6.0 x 1.5mm.
- > Ultra low height profile - 1.5 mm.
- > Designed for high current drive; typically 350 mA.
- > Low thermal resistance; $R_{th(j-s)} = 18 \text{ K/W}$.
- > Qualified according to JEDEC moisture sensitivity Level 2.
- > Compatible to IR reflow soldering.
- > Environmental friendly; RoHS compliance.
- > SPNova are Class 2 LED products. Do not view directly with optical instrument.



Applications:

- > Automotive: Interior and exterior applications
- > Lighting: garden light, architecture lighting, general lighting. etc



Optical Characteristics at Tj=25°C

Part Ordering Number	Color	Viewing Angle°	Luminous Flux @ 350mA (lm)		
			Min.	Typ.	Max.
NPW-WSD-ST-1	White	120	51.7	70.0	87.4

NOTE

1. Luminous flux is measured with an accuracy of $\pm 11\%$.
2. Luminous flux is measured with a 25 ms pulse.
3. Wavelength binning is carried for all units as per the wavelength-binning table. Only one wavelength group is allowed for each reel.

Electrical Characteristics at Tj=25°C


Part Number	Vf @ If = 350mA			Vr @ Ir = 10uA
	Min. (V)	Typ. (V)	Max. (V)	Min. (V)
NPW-WSD	3.0	3.5	4.0	5.0

Forward voltages are measure using a current pulse of 1 ms and with an accuracy of $\pm 0.1V$.

Absolute Maximum Ratings

	Maximum Value	Unit
DC forward current	350	mA
Peak pulse current (tp<=0.01s, Duty Cycle=0.1)	1000	mA
Reverse voltage	5	V
ESD threshold (HBM)	2000	V
LED junction temperature	125	°C
Operating temperature	-40 ... +100	°C
Storage temperature	-40 ... +100	°C

Color Bin

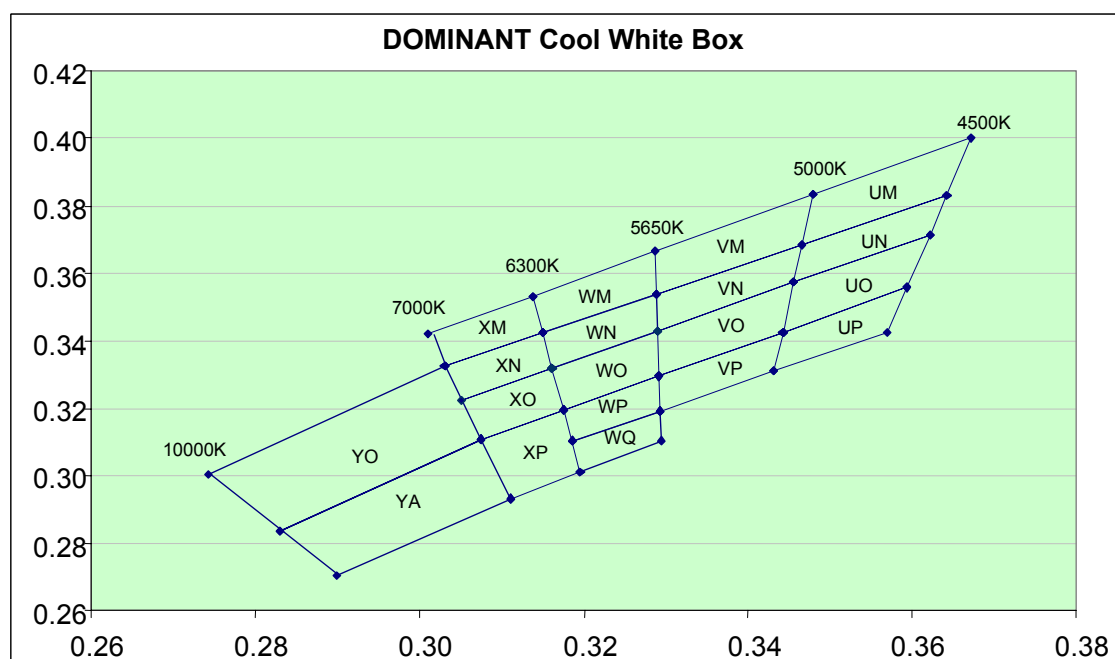

Chromaticity coordinate groups are measured with an accuracy of ± 0.01 .

Bin		1	2	3	4
YO	Cx	0.274	0.303	0.308	0.283
	Cy	0.301	0.333	0.311	0.284
YA	Cx	0.283	0.308	0.311	0.290
	Cy	0.284	0.311	0.293	0.270
XM	Cx	0.301	0.314	0.315	0.303
	Cy	0.342	0.353	0.343	0.333
XN	Cx	0.303	0.315	0.316	0.305
	Cy	0.333	0.343	0.332	0.322
XO	Cx	0.305	0.316	0.318	0.308
	Cy	0.322	0.332	0.319	0.311
XP	Cx	0.308	0.318	0.320	0.311
	Cy	0.311	0.319	0.301	0.293
WM	Cx	0.314	0.329	0.329	0.315
	Cy	0.353	0.366	0.354	0.343
WN	Cx	0.315	0.329	0.329	0.316
	Cy	0.343	0.354	0.343	0.332
WO	Cx	0.316	0.329	0.329	0.318
	Cy	0.332	0.343	0.330	0.319
WP	Cx	0.318	0.329	0.329	0.319
	Cy	0.319	0.330	0.319	0.310
WQ	Cx	0.319	0.329	0.330	0.320
	Cy	0.310	0.319	0.311	0.301
VM	Cx	0.329	0.348	0.347	0.329
	Cy	0.366	0.383	0.368	0.354


Bin		1	2	3	4
VN	Cx	0.329	0.347	0.346	0.329
	Cy	0.354	0.368	0.357	0.343
VO	Cx	0.329	0.346	0.344	0.329
	Cy	0.343	0.357	0.343	0.330
VP	Cx	0.329	0.344	0.343	0.329
	Cy	0.330	0.343	0.331	0.319
UM	Cx	0.348	0.367	0.364	0.347
	Cy	0.383	0.400	0.383	0.368
UN	Cx	0.347	0.364	0.362	0.346
	Cy	0.368	0.383	0.372	0.357
UO	Cx	0.346	0.362	0.359	0.344
	Cy	0.357	0.372	0.356	0.343
UP	Cx	0.344	0.359	0.357	0.343
	Cy	0.343	0.356	0.343	0.331

Luminous Flux Group at Tj=25°C


Brightness Group	Luminous Flux (lm)
S2	51.7...59.0
S3	59.0...67.2
T2	67.2...76.5
T3	76.5...87.4

Luminous flux is measured with an accuracy of $\pm 11\%$.


Relative Intensity Vs Forward Current

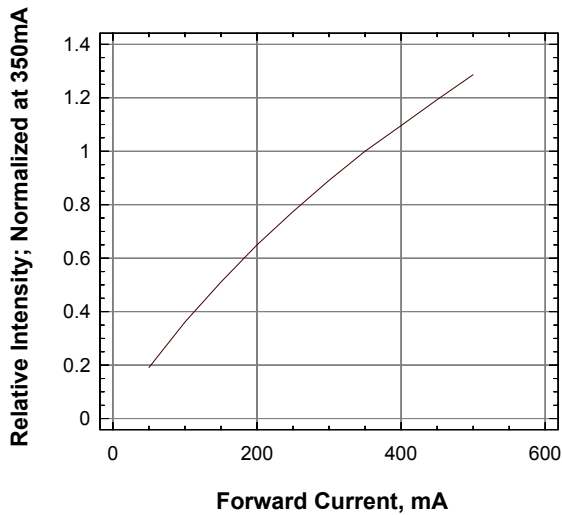


Relative Flux Vs Forward Current

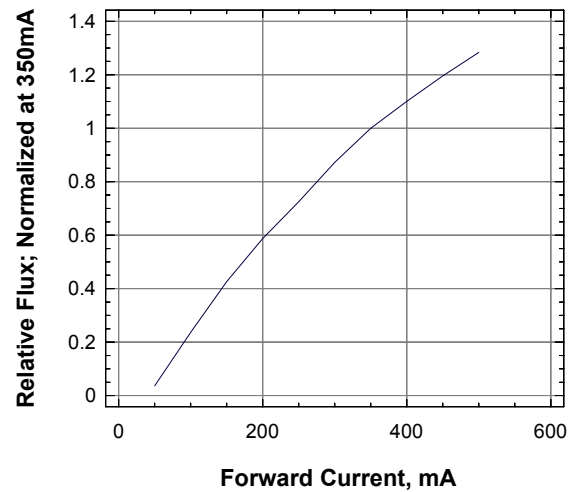


Forward Current Vs Forward Voltage

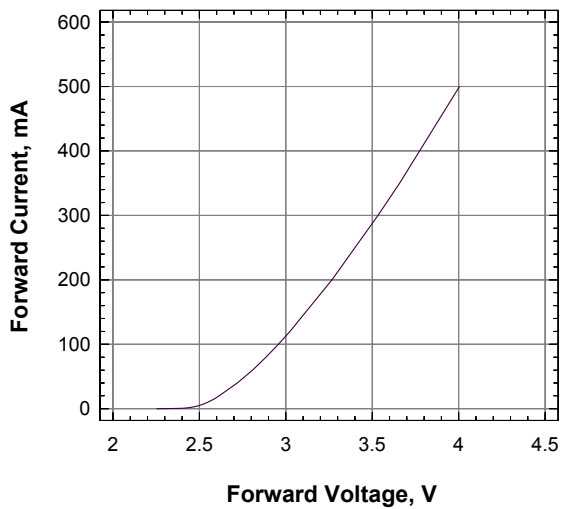


Relative Spectral Emission

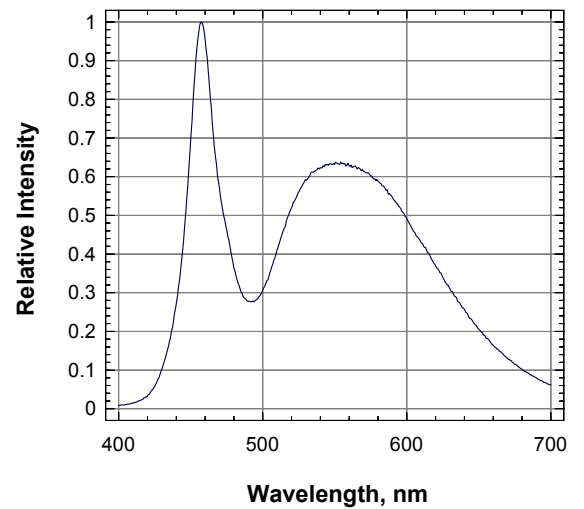


Forward Current Vs Ambient Temperature (Rja=40K/W)

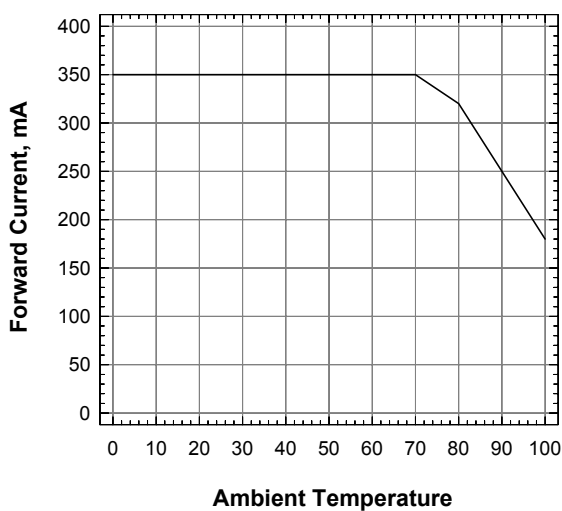


Maximum Permissible Pulse Current

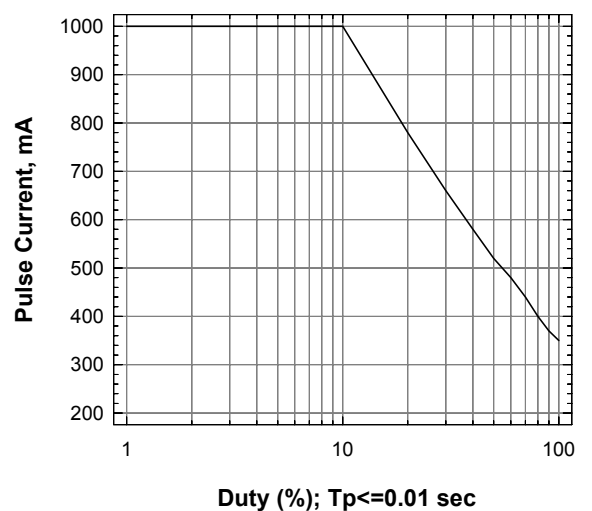


Radiation Pattern

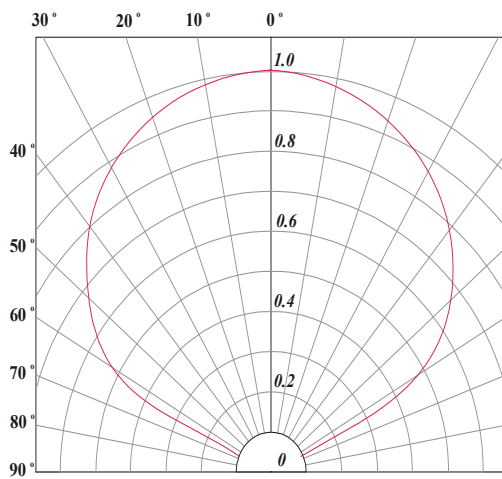

Forward Current Vs Solder Point Temperature

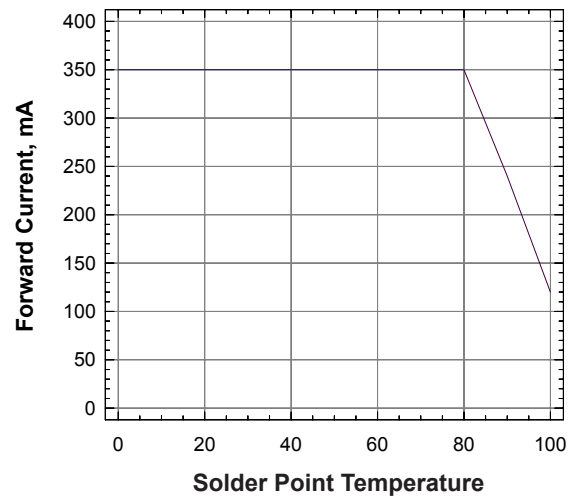


SPNova™ • InGaN White High Lumens : NPW-WSD Package Outlines

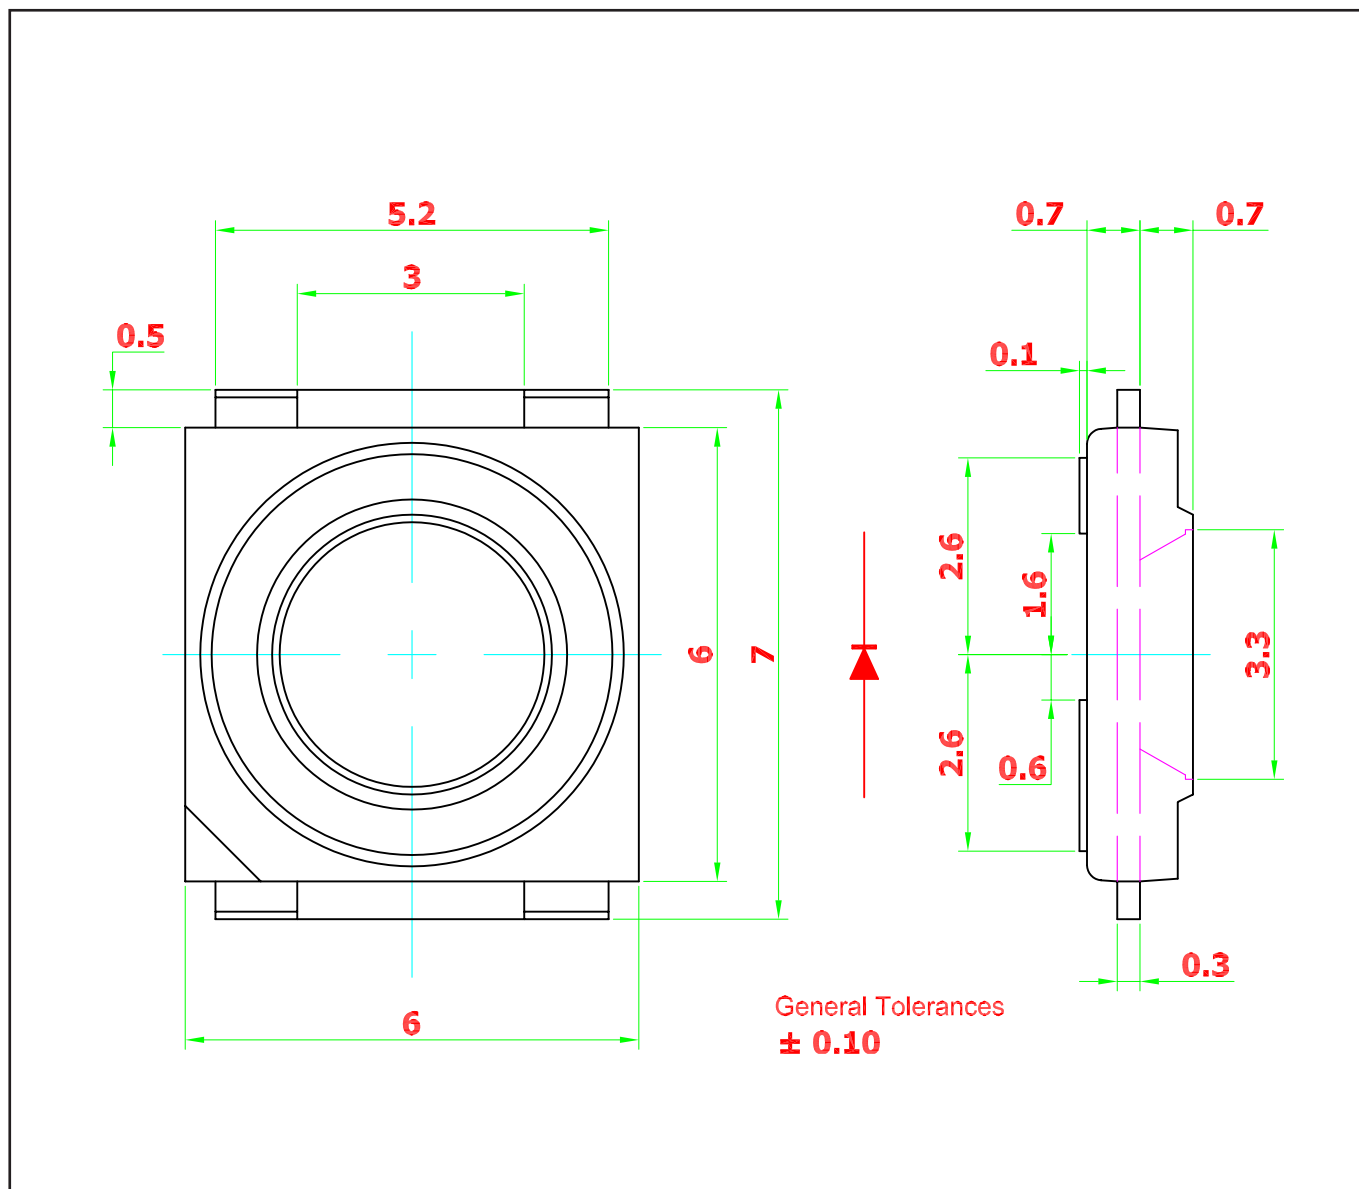

Material


Material	
Lead-frame	Cu Alloy With Ag Plating
Package	High Temperature Resistant Plastic, PPA
Encapsulant	Silicone Resin
Soldering Leads	Sn-Sn Plating

Solder Pad Design

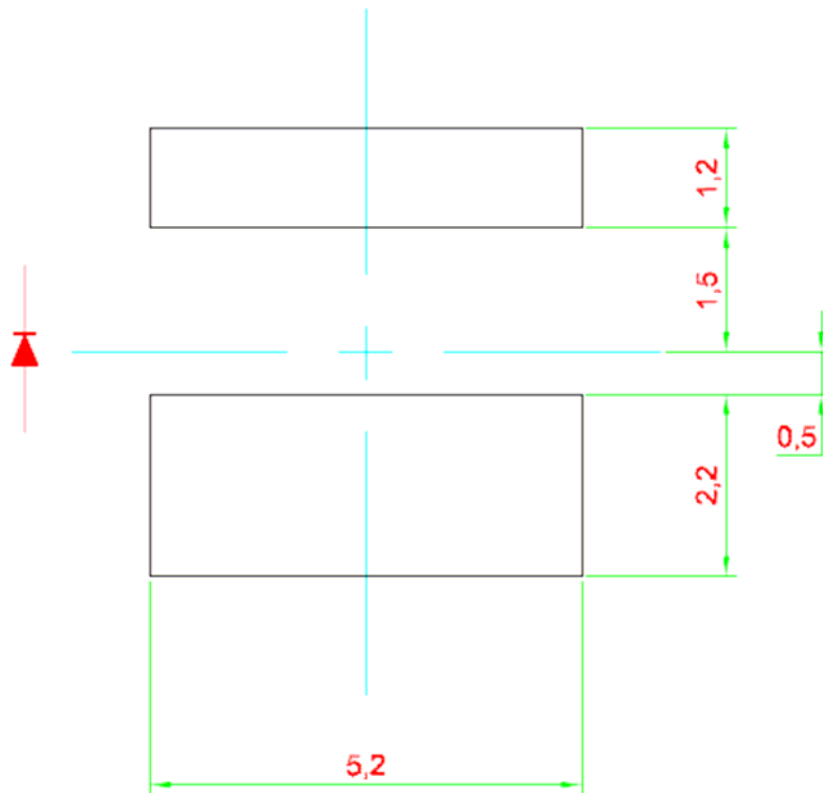


Taping and orientation


- Reels come in quantity of 2000 units.
- Reel diameter is 330 mm.

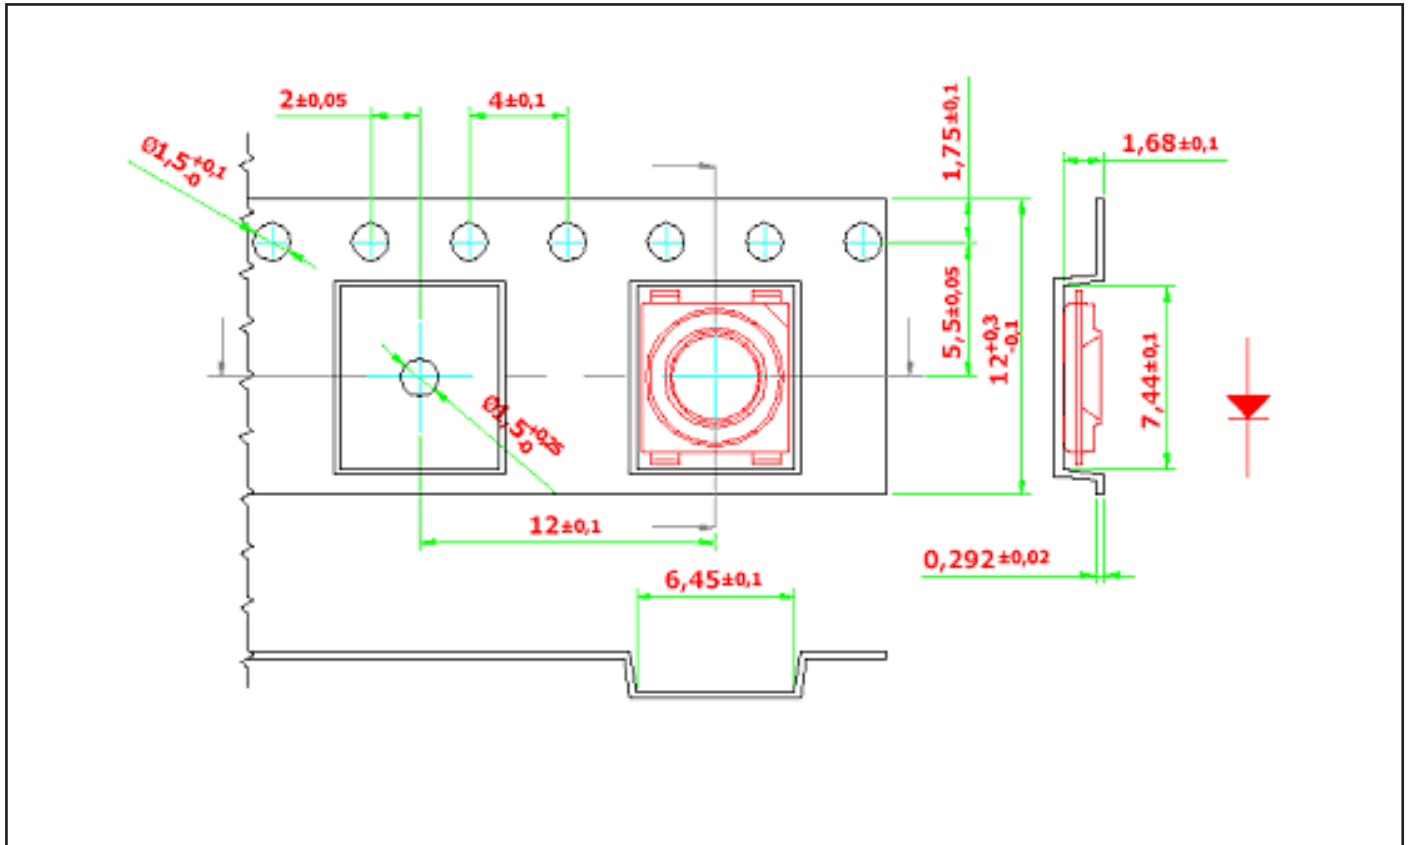


Packaging Specification

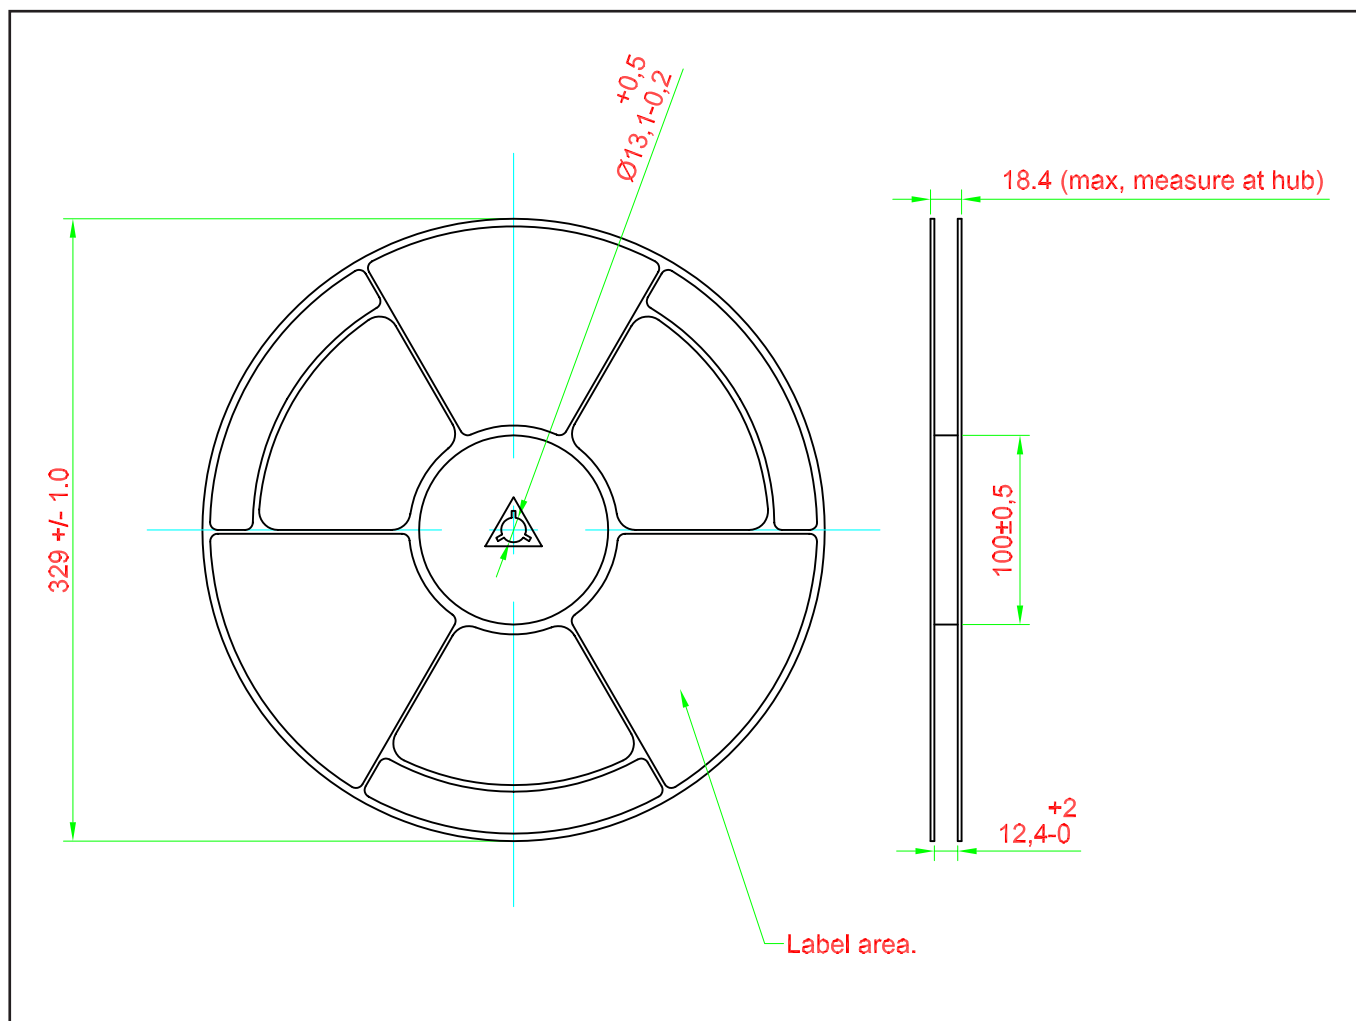

Packaging Specification

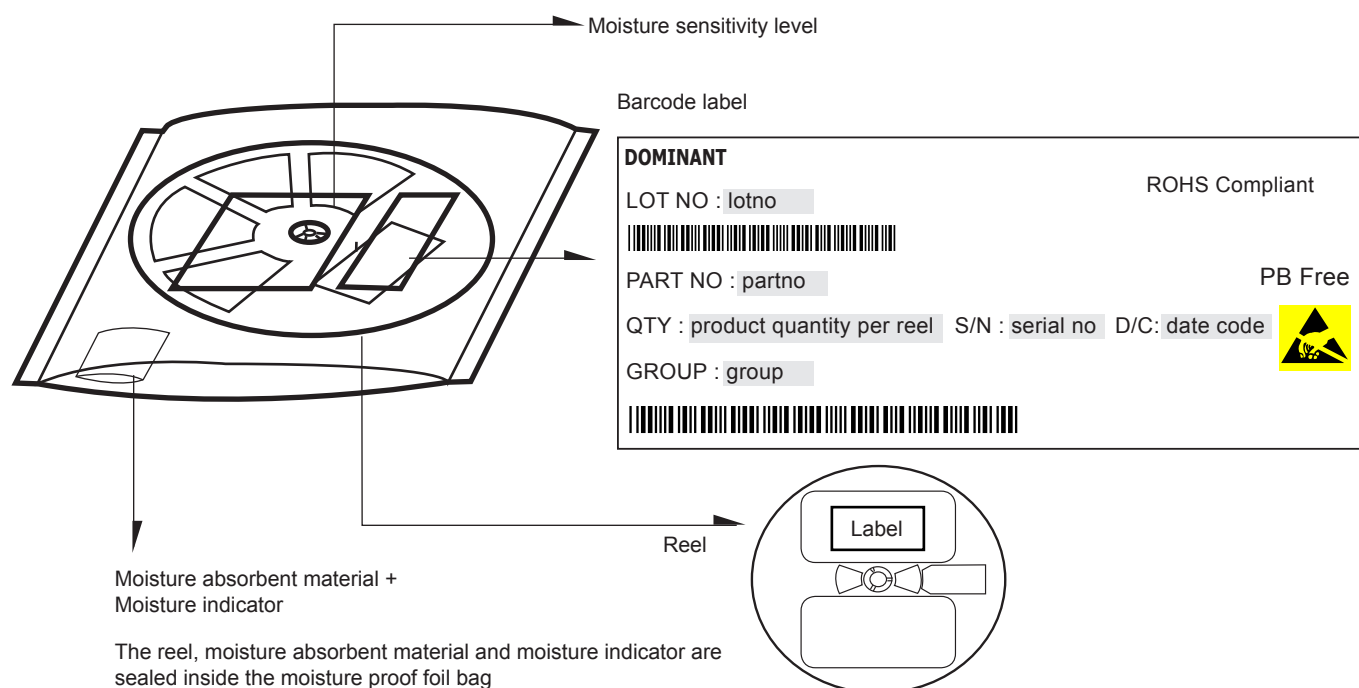


	Average 1pc SPNova	1 completed bag (2000pcs)
Weight (gram)	0.188	800 ± 10

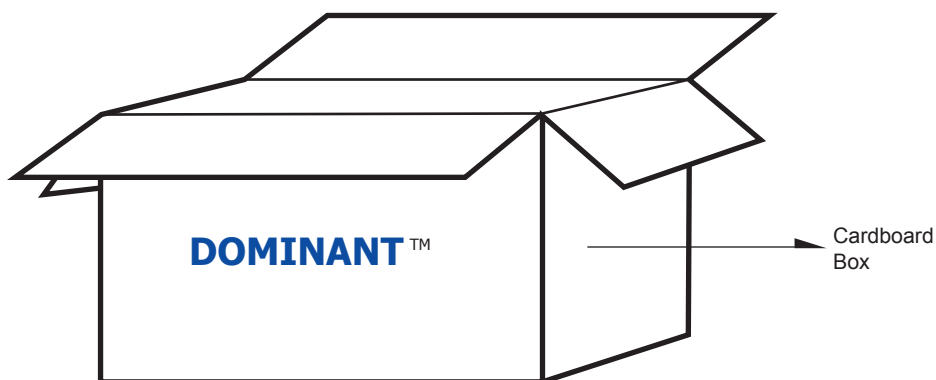


For SPNova™

Cardboard Box Size	Dimensions (mm)	Empty Box Weight (kg)	Reel / Box	Quantity / Box (pcs)
Large	416 x 516 x 476	1.74	20 reels MAX	40,000 MAX

Recommended Sn-Pb IR-Reflow Soldering Profile

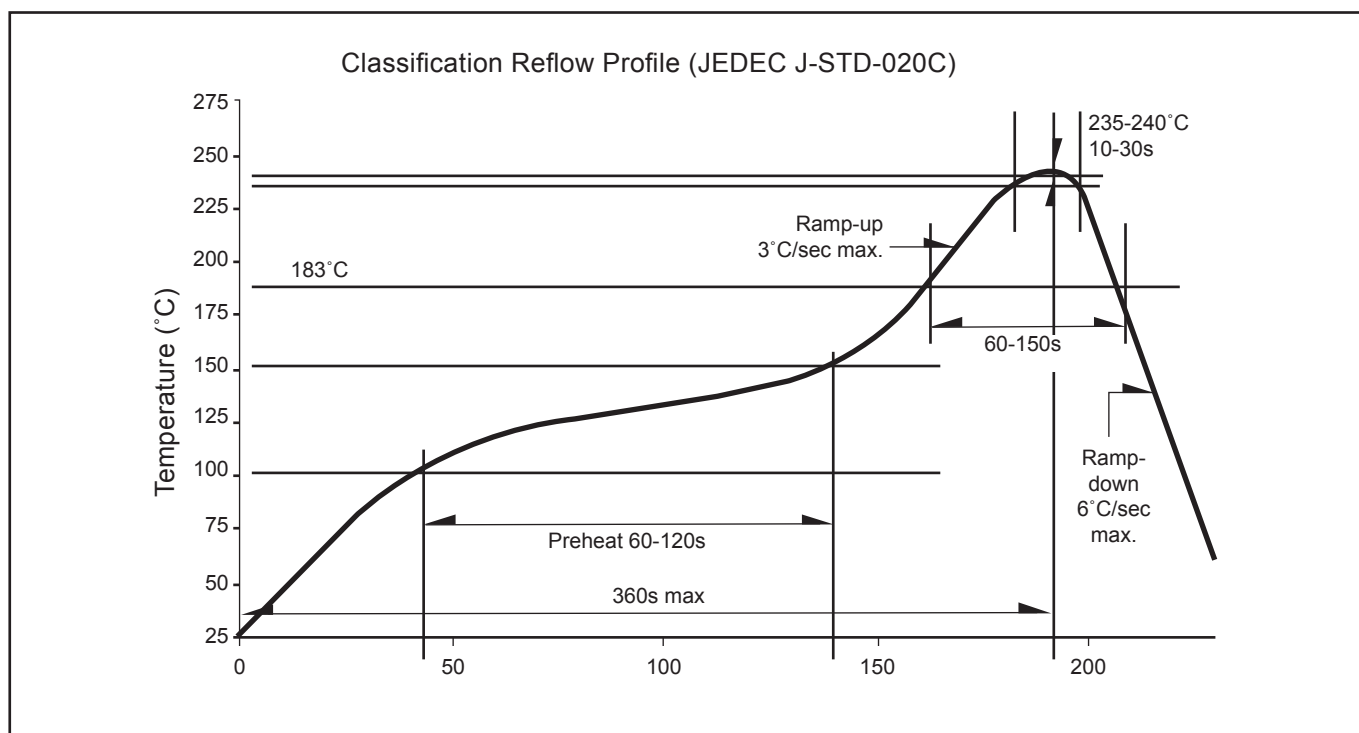

Recommended Pb-free Soldering Profile

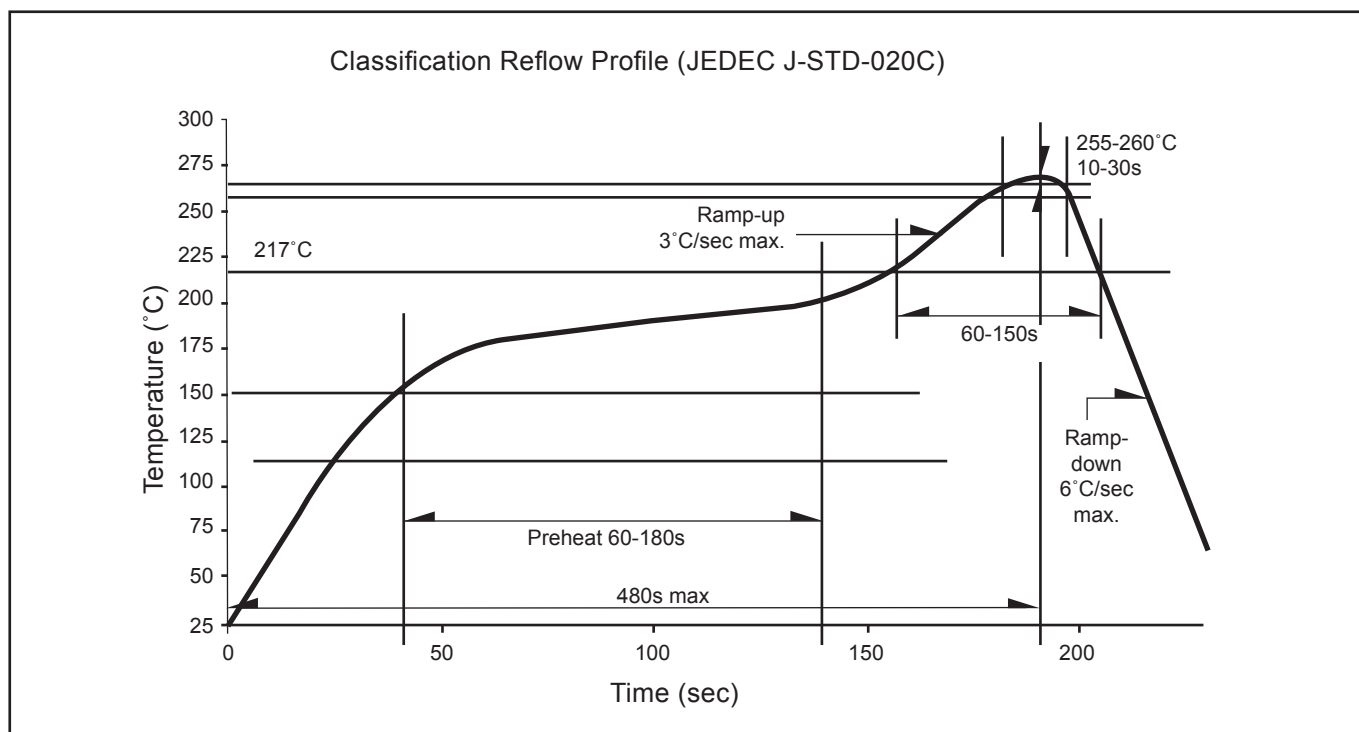

Revision History

Page	Subjects	Date of Modification
-	Initial Release	10 Mar 2008
2	Update Peak Pulse Current to 1000mA	17 Mar 2009
-	Update company name	05 Apr 2010
-	Corrections on SPNova	07 Jul 2011
1	Corrections on SPNova	22 Aug 2011

NOTE

All the information contained in this document is considered to be reliable at the time of publishing. However, DOMINANT Opto Technologies does not assume any liability arising out of the application or use of any product described herein.

DOMINANT Opto Technologies reserves the right to make changes to any products in order to improve reliability, function or design.

DOMINANT Opto Technologies products are not authorized for use as critical components in life support devices or systems without the express written approval from the Managing Director of DOMINANT Opto Technologies.

About Us

DOMINANT Opto Technologies is a dynamic Malaysian Corporation that is among the world's leading SMT LED Manufacturers. An excellence – driven organization, it offers a comprehensive product range for diverse industries and applications. Featuring an internationally certified quality assurance acclaim, DOMINANT's extra bright LEDs are perfectly suited for various lighting applications in the automotive, consumer and communications as well as industrial sectors. With extensive industry experience and relentless pursuit of innovation, DOMINANT's state-of-art manufacturing, research and testing capabilities have become a trusted and reliable brand across the globe. More information about DOMINANT Opto Technologies can be found on the Internet at <http://www.dominant-semi.com>.

Please contact us for more information:

Head Quarter

DOMINANT Opto Technologies Sdn. Bhd.
Lot 6, Batu Berendam, FTZ Phase III, 75350 Melaka, Malaysia
Tel: (606) 283 3566 Fax: (606) 283 0566
E-mail: sales@dominant-semi.com

DOMINANT Opto Technologies Sdn. Bhd. Shanghai Representative Office

Room 305, Hongwell International Plaza No. 1600 Zhong Shan (W) Rd, Xuhui District, Shanghai, China 200235
Tel: +86 21 5403 5655, +86 21 5403 5818 Fax: +86 21 5403 6055
E-mail: sales_china@dominant-semi.com

DOMINANT Korea Sales Office

DOMINANT Semiconductors Korea Inc.
RM 211 SUNTEAK CITY APT. 513-15 Sangdaewon-dong, Jungwon-gu, Seongnam-si, Gyeonggi-do, 462-725, Korea
Tel: +82-31-701-5203 Fax: +82-31-701-5204
E-mail: sales_korea@dominant-semi.com

DOMINANT U.S.A Sales Office

25 Rockaway Road, 08833 Lebanon, New Jersey, USA
Tel: (908) 439-9930 Cell: (908) 343-5810 Fax: (908) 439-9929
E-mail: don.wendel@dominant-semi.com

DOMINANT Europe Sales Office

DOMINANT Semiconductors Europe GmbH
Raiffeisenstr. 38, 74906 Bad Rappenau Germany
Tel: +49 (0) 7264-89010-10 / +49 (0) 7264-89010-11 Cell: +49 173-6907370 / +49 173-6907751
Fax: +49 (0) 7264-89010-29
E-mail: gerd.wachno@dominant-semi.eu; hartmut.wettengl@dominant-semi.eu

DOMINANT India Sales Office

C-11, Vasanth Business Centre #86, TTK Road, Alwarpet Chennai - 600 018, INDIA
Tel: 91-44-42030616 / 516 Cell: 91-9444920537 Fax: 91-9444920616
E-mail: pravat.behera@dominant-semi.com

