

Lamp Type LED - 5mm Round

Synonymous with function and performance, the 5mm Round LED has superior performance in outdoor applications due to its well-defined radiation pattern and wide viewing angle. These lamps are made with an advanced optical grade epoxy, offering superior high temperature and high moisture resistance performance in outdoor signal and sign applications

Features:

- > High brightness LED lamp.
- > Narrow viewing angle; 15° and 30°
- > Superior resistance to moisture.
- > Suitable for TTW soldering.

Applications:

- > Full color signs
- > Outdoor displays/signs



Optical Characteristics at Tj=25°C

Part Ordering Number	Color	Viewing Angle°	Luminous Intensity @ IF = 20mA IV (mcd)		
			Min.	Typ.	Max.
● L5B-H1500-Z1AA-1	Blue, 470nm	15	4500.00	6000.00	9000.00
L5B-H1500-Z2AB-1	Blue, 470nm	15	5600.00	9000.00	11250.00
L5B-H3000-YZ2-1	Blue, 470nm	30	2850.00	4500.00	7150.00
L5T-H1500-AEG-1	True Green, 530nm	15	18000.00	24000.00	35500.00
L5T-H3000-AAC-1	True Green, 530nm	30	7150.00	11000.00	14000.00

● Not for new design

NOTE

1. Luminous intensity is measured with an accuracy of $\pm 15\%$.
2. Wavelength binning is carried for all units as per the wavelength-binning table. Only one wavelength group is allowed for each pack.

Electrical Characteristics at Tj=25°C

Part Number	Min. (V)	Vf @ If = 20mA		Vr @ Ir = 10uA
		Typ. (V)	Max. (V)	
L5x	2.8	3.2	3.8	5

Forward voltages are measure using a current pulse of 1 ms and with an accuracy of $\pm 0.1V$.

Absolute Maximum Ratings

	Maximum Value	Unit
DC forward current	25	mA
Peak pulse current; (tp ≤ 10μs, Duty cycle = 0.10)	100	mA
Reverse voltage ; Ir (max) = 10μA.	5	V
ESD threshold (HBM)	2000	V
LED junction temperature	120	°C
Operating temperature	-40 ... +100	°C
Storage temperature	-40 ... +100	°C
Power dissipation (at room temperature)	95	mW

Wavelength Grouping at Tj=25°C

Color	Group	Wavelength distribution (nm)
L5B; Blue	Full	464 - 476
	W	464 - 468
	X	468 - 472
	Y	472 - 476
L5T; True Green	Full	520 - 536
	W	520 - 524
	X	524 - 528
	Y	528 - 532
	Z	532 - 536

Dominant wavelength is measured with an accuracy of ± 1 nm.

Luminous Intensity Group at Tj=25°C

Brightness Group	Luminous Intensity IV (mcd)
Y1	2850.0...3550.0
Y2	3550.0...4500.0
Z1	4500.0...5600.0
Z2	5600.0...7150.0
AA	7150.0...9000.0
AB	9000.0...11250.0
AC	11250.0...14000.0
AE	18000.0...22400.0
AF	22400.0...28500.0
AG	28500.0...35500.0


Luminous intensity is measured with an accuracy of $\pm 15\%$.

Vf Binning (Optional)


Vf Bin @ 20mA	Forward Voltage (V)
V7	2.80 ... 3.00
V8	3.00 ... 3.20
V9	3.20 ... 3.40
V10	3.40 ... 3.60
V11	3.60 ... 3.80

Forward voltage, Vf is measured with an accuracy of ± 0.1 V. Parts with the Vf binning option will be defined as L5x-Hxxxx-xxxx-x-Vx. Please consult sales and marketing for special part number to incorporate Vf binning.


Relative Intensity vs Forward Current

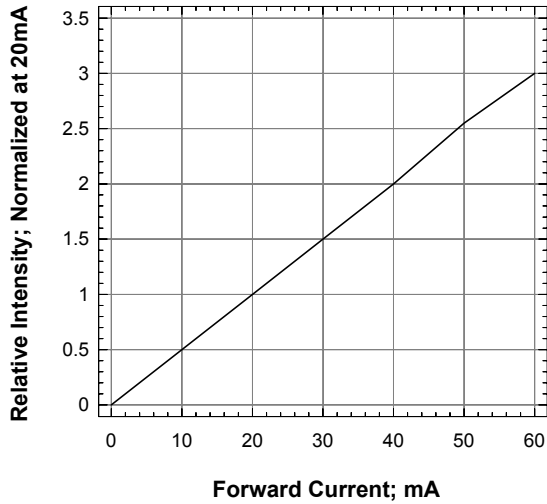


Forward Current Vs Forward Voltage

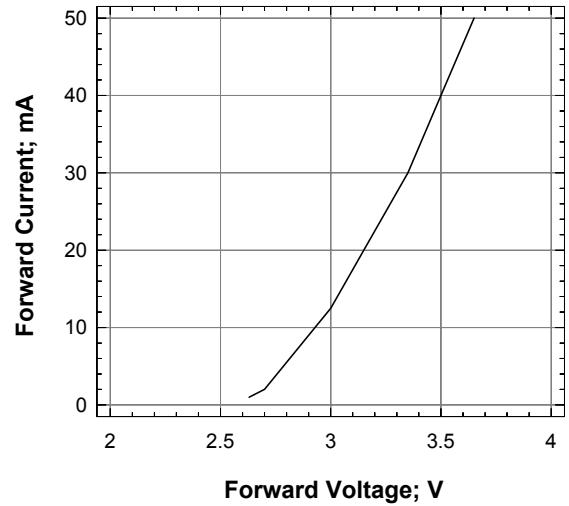


Maximum Current Vs Ambient Temperature

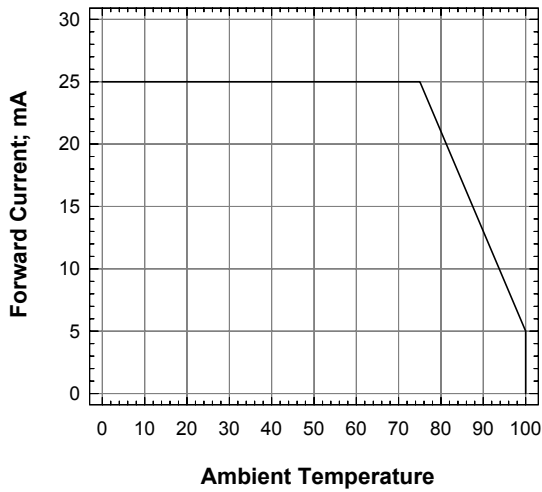


Wavelength Shift vs Forward Current

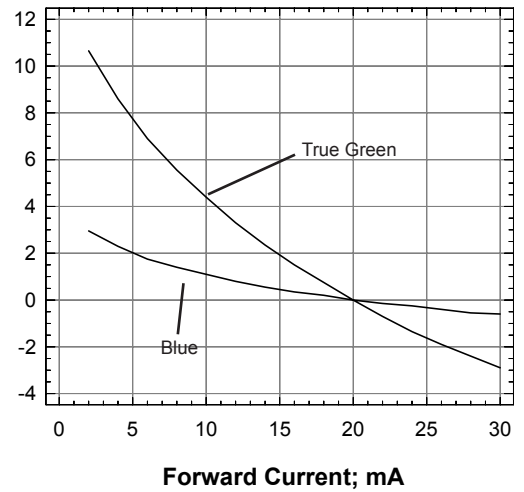


Relative Intensity Vs Wavelength

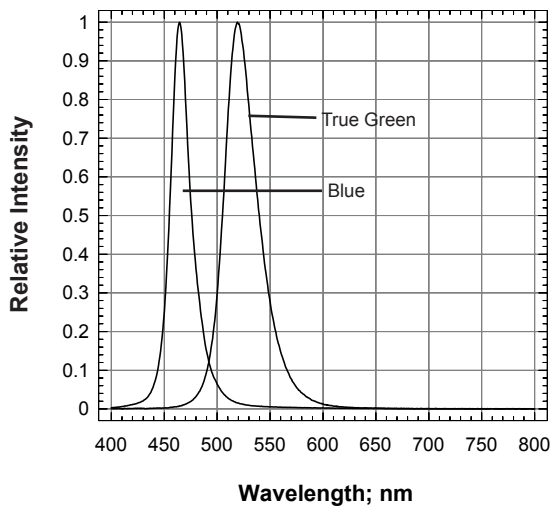


Radiation Pattern (2Θ=15°)

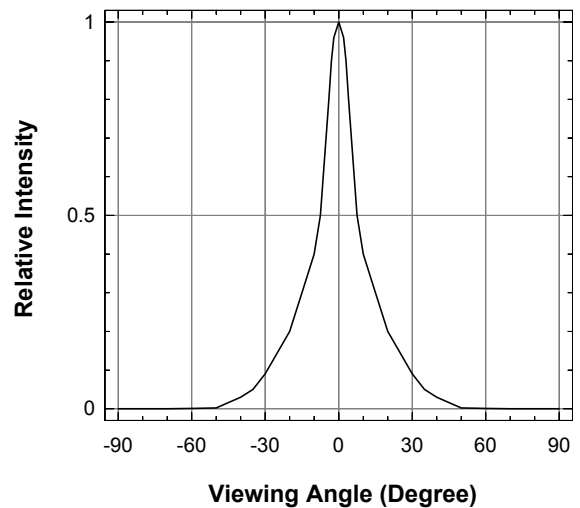

Radiation Pattern ($2\theta=30^\circ$)

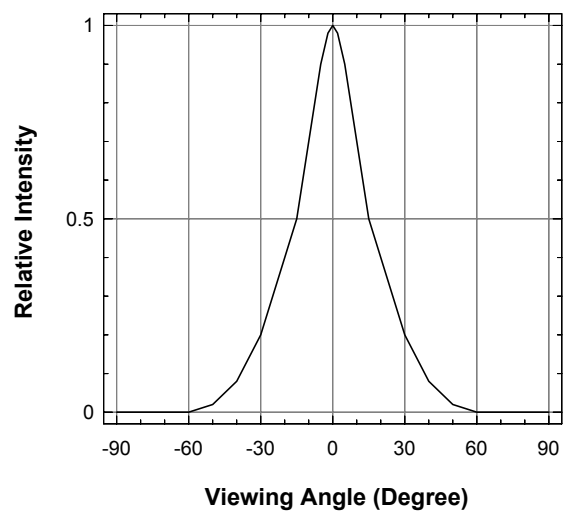


5mm Lamp • InGaN : High Brightness Package Outlines

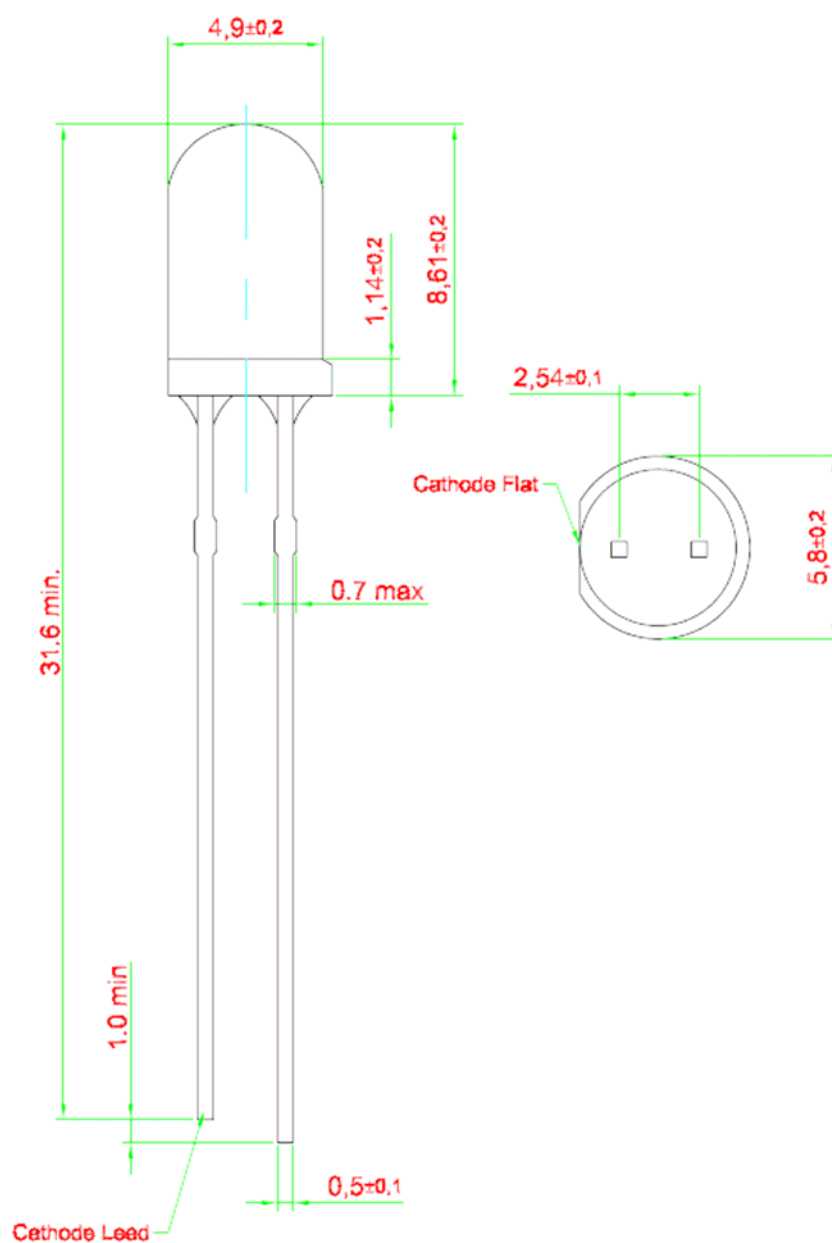

Epoxy meniscus may extend 1.5mm max. down the LED

5mm Lamp • InGaN : High Brightness Package Outlines

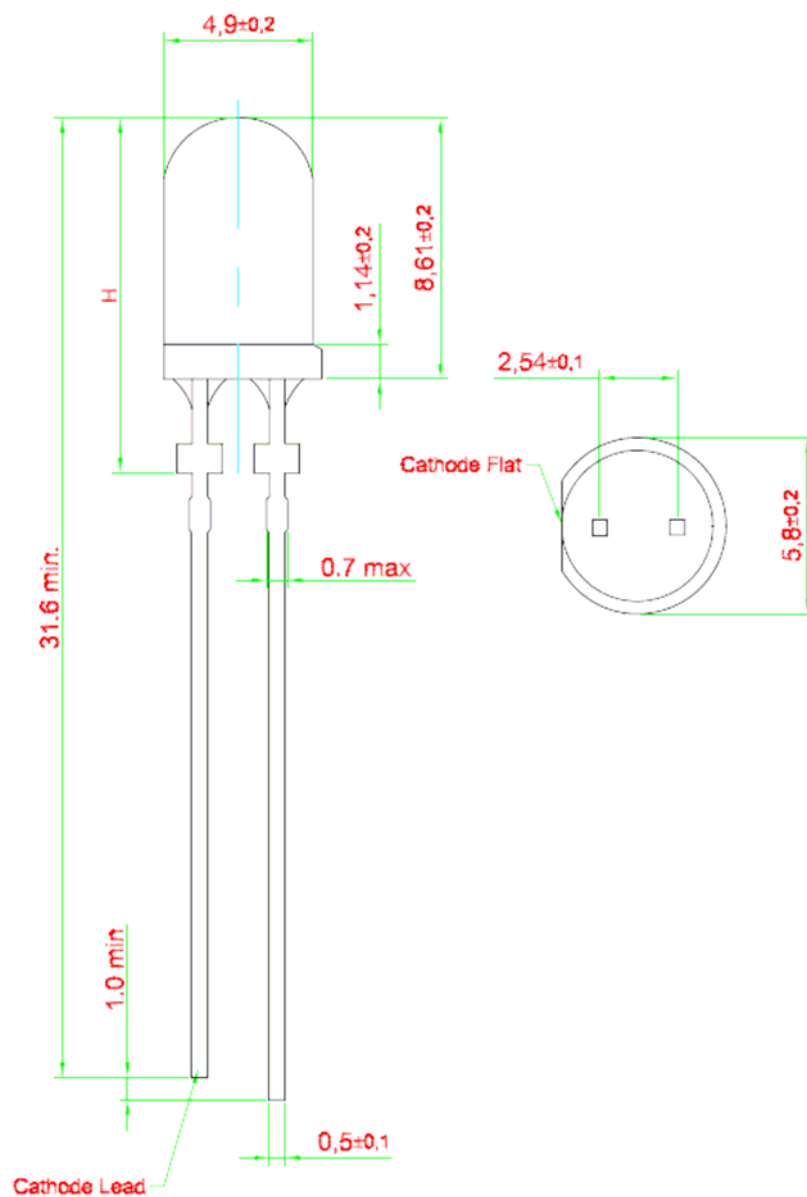

Epoxy meniscus may extend 1.5mm max. down the

Parts with the stand-off option will be defined as L5x-HxxxS-xxxx-1


Option with stand-off - Parts with 15° viewing angle; $H = 12.6\text{mm} \pm 0.5\text{mm}$

Parts with 30° viewing angle; $H = 12.0\text{mm} \pm 0.5\text{mm}$

Packaging Specification

1. Loose pack of 500pcs/pack: L5x-xxxxxx-xxxx-x-x-0

	Average 1pc 5mm Lamp	1 completed pack (500pcs)
Weight (gram)	0.29	150 ± 10

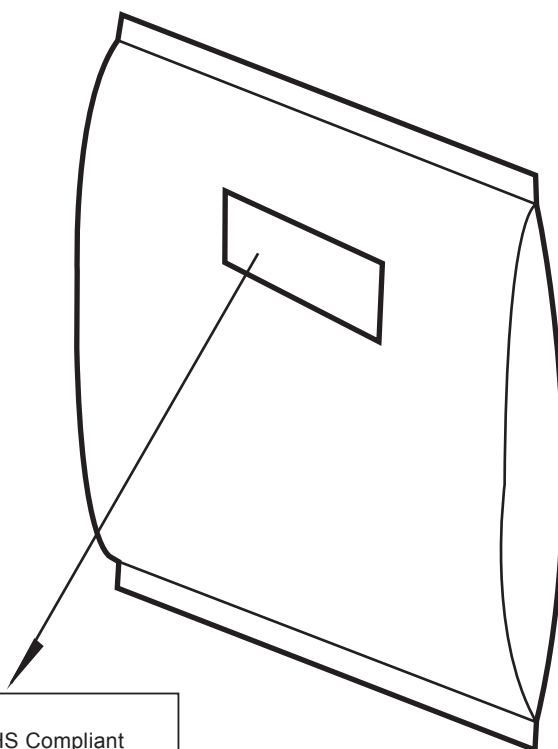


Barcode label


DOMINANT		ROHS Compliant
LOT NO : lotno		
		
PART NO : partno	PB Free	
QTY : product quantity per reel	S/N : serial no	D/C: date code
GROUP : group		
		

Packaging Specification

2. Ammopack: L5x-xxxxx-xxxx-x-x-A

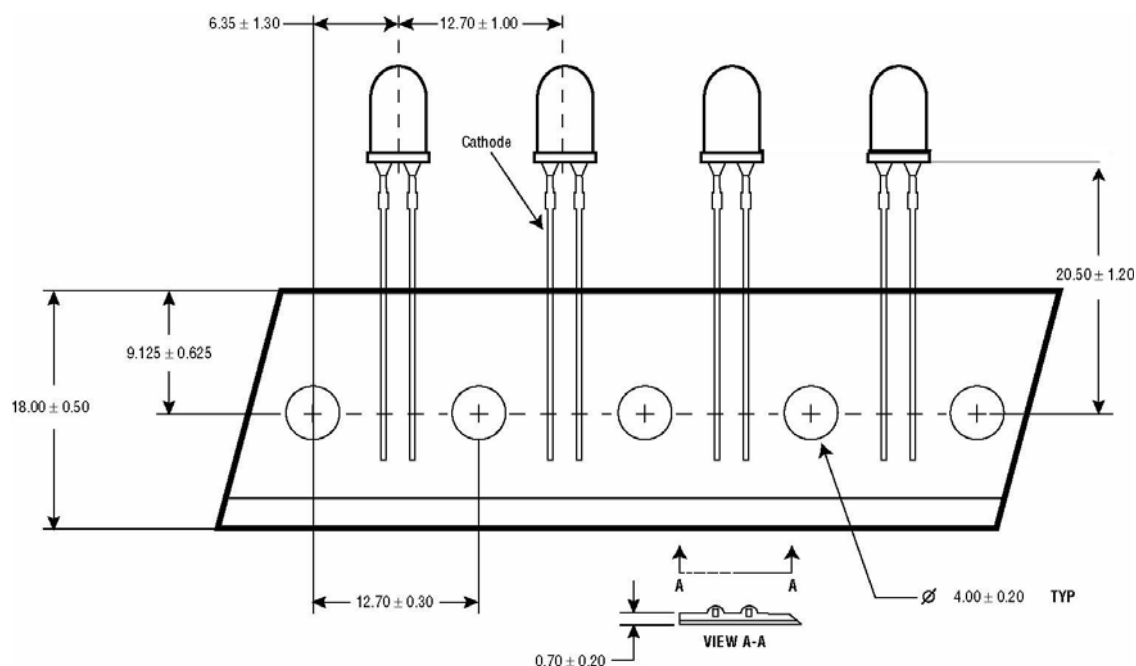


Average 1pc 5mm Lamp (g)	Box Dimensions (mm)	Empty Box Weight (kg)	Quantity / Box (pcs)	1 Completed Box With Units (kg)
0.29	335 x 235 x 48	0.14	2,000	0.95 ± 10

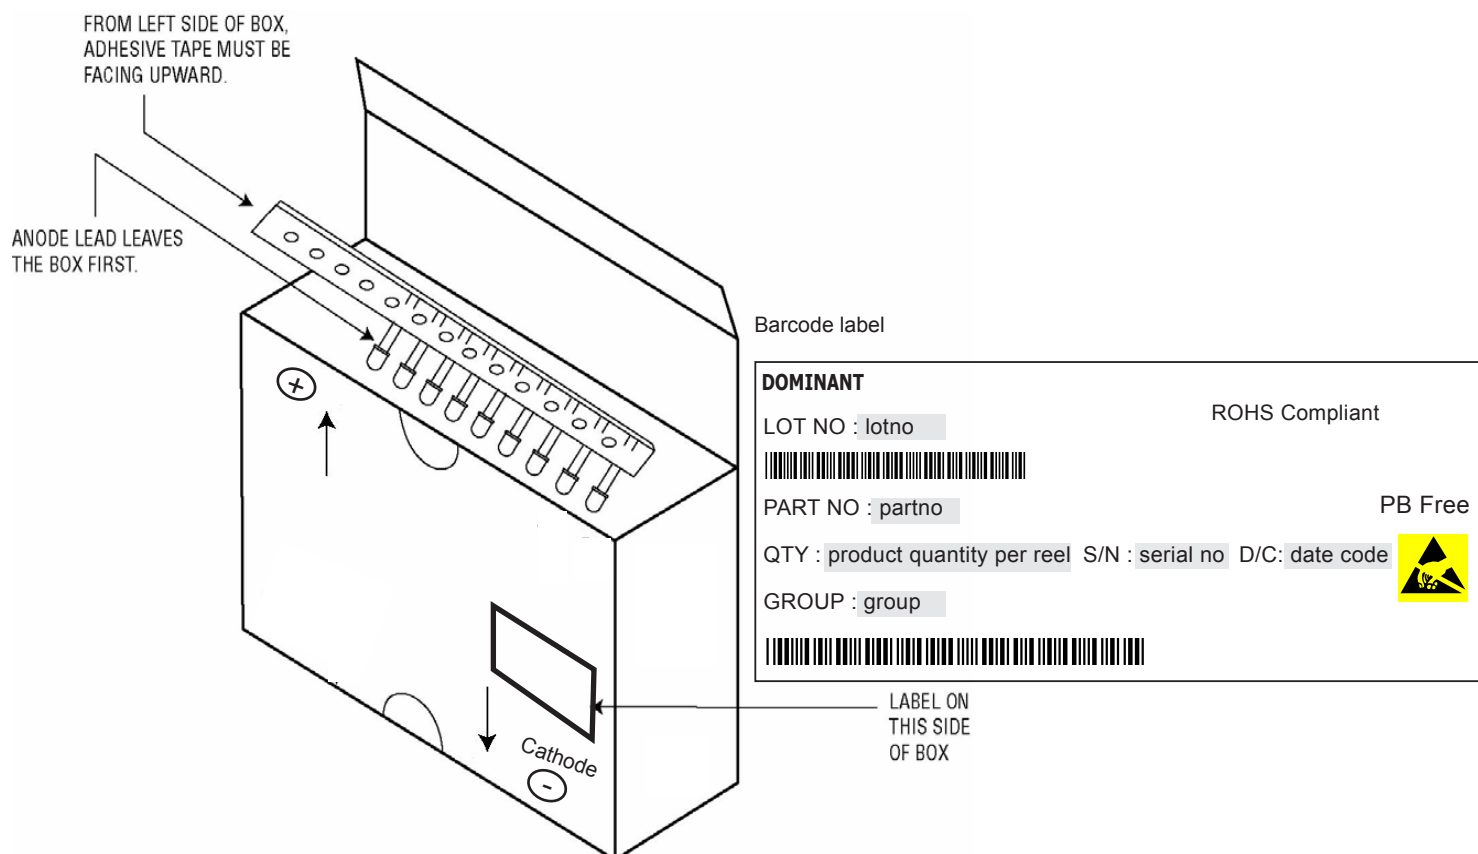


Packaging Specification

3. Reel: L5x-xxxxx-xxxx-x-x-T

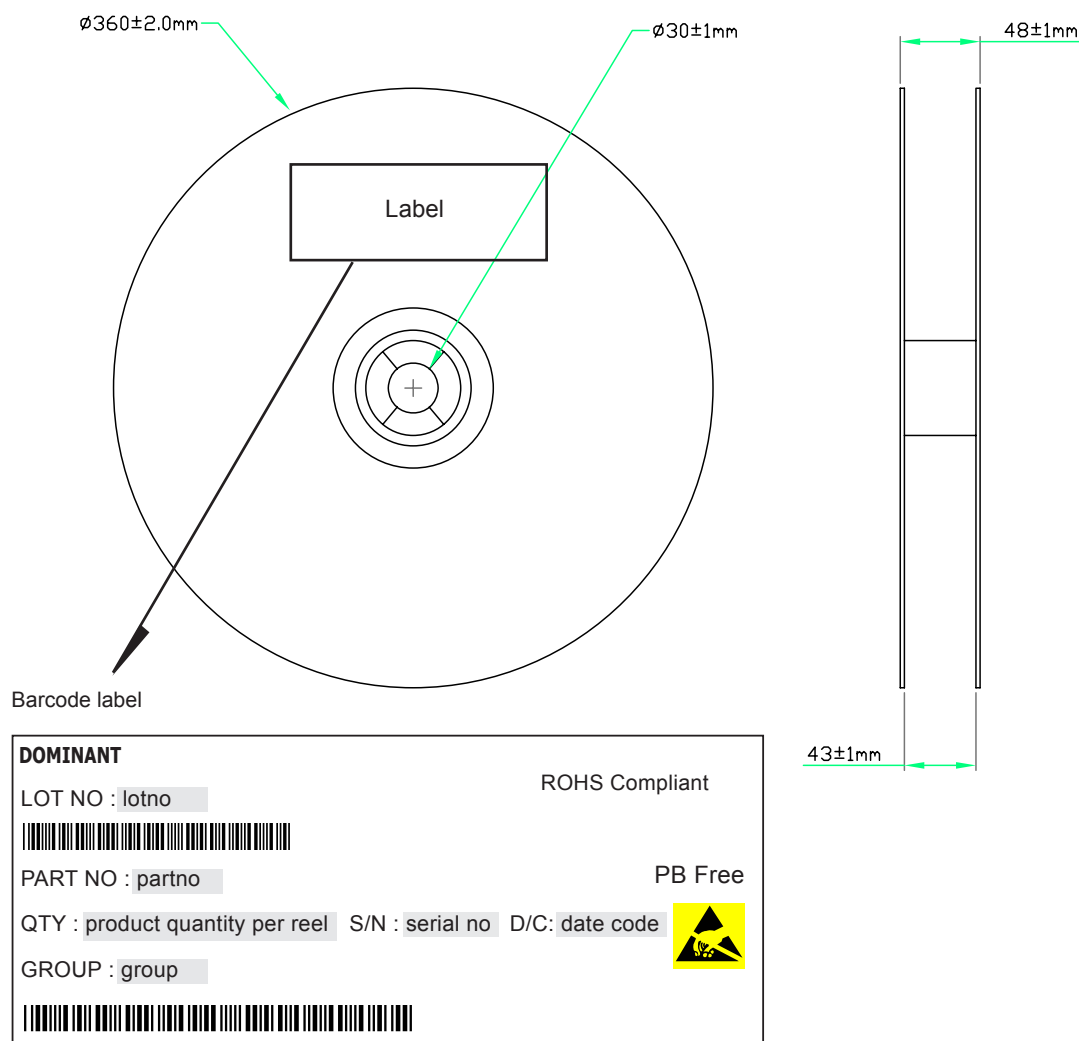

Average 1pc 5mm Lamp (g)	Empty Reel Weight (kg)	Quantity / Reel (pcs)	1 Completed Reel (kg)
0.29	0.39	1,300	0.95 ± 10

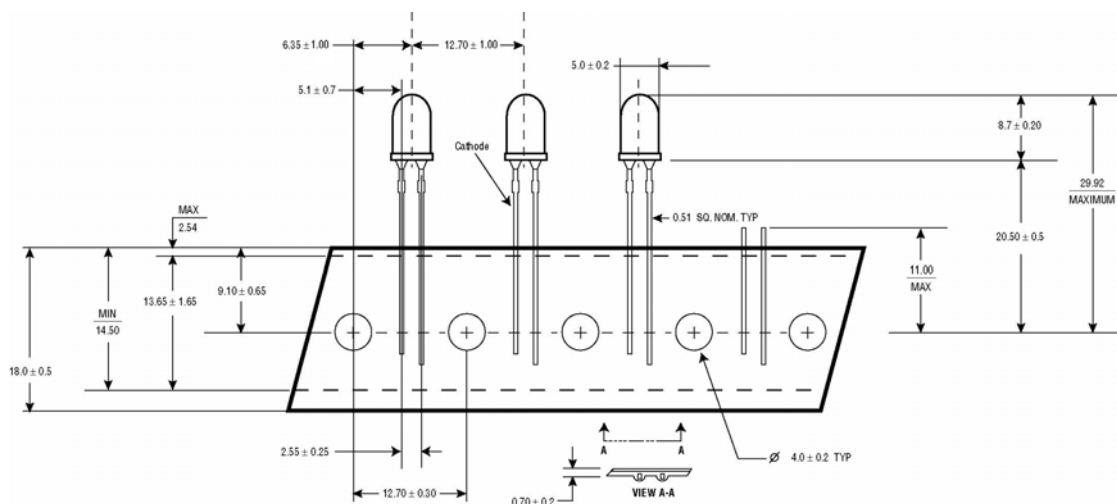


Packaging Specification

Adhesive Tape Must
Be Facing Towards
The Outside Of The Reel


Reeling Orientation
Clockwise

Anode Lead
Leaves The
Reel First

Protective
Cardboard

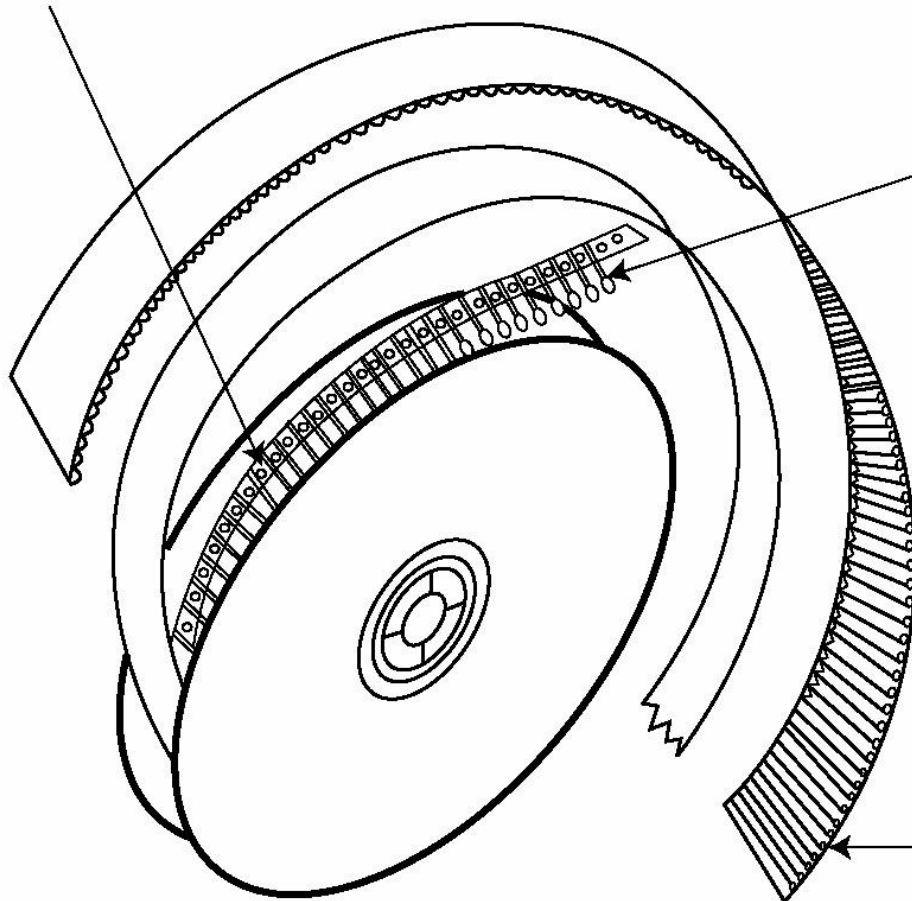

Recommended TTW Soldering Profile (acc. to CECC 00802)

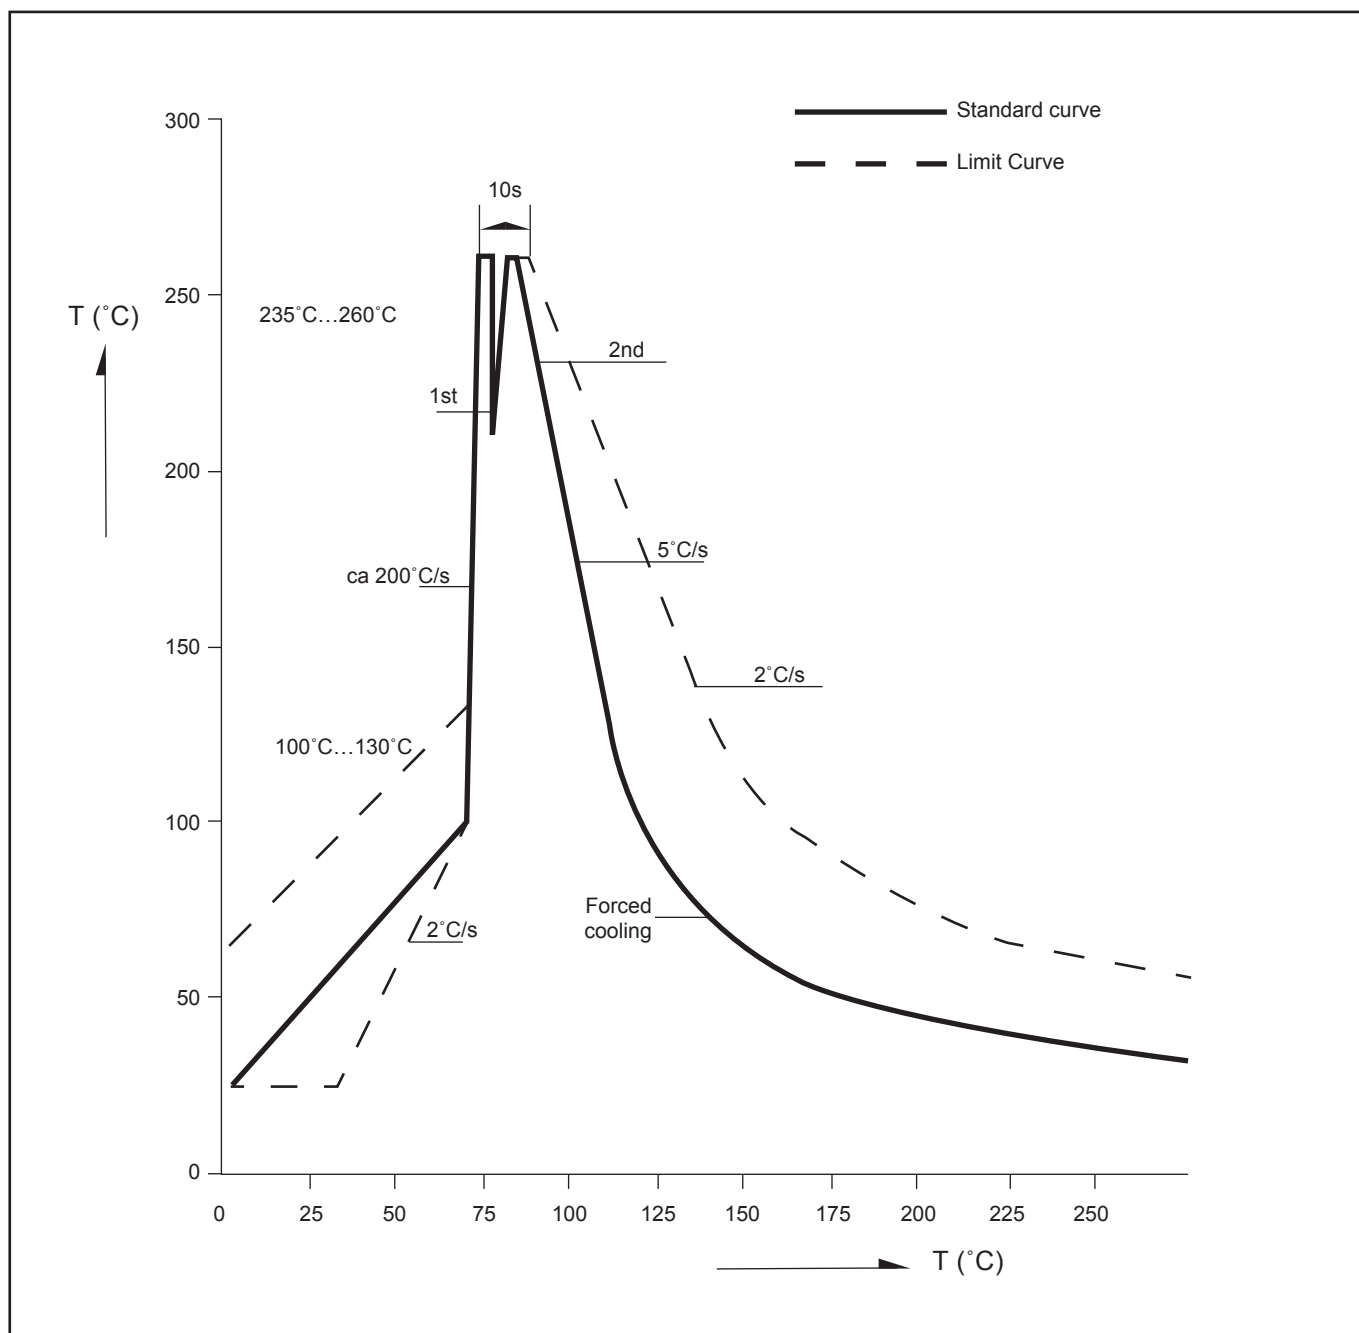

Revision History

Page	Subjects	Date of Modification
-	Initial Release	30 Sep 2009
2	Typo error on typical value for L5B-H3000-YZ2-1	30 Nov 2009
2	Not for new design--> L5B-H1500-Z1AA-1 Add new partno --> L5B-H1500-Z2AB-1	10 Mar 2010
2	Add new partno --> L5C-H1500-ADF-1 --> L5C-H3000-ZAB-1	16 Jun 2010
2	Remove partno --> L5C-H1500-ADF-1 --> L5C-H3000-ZAB-1	30 Oct 2012

NOTE

All the information contained in this document is considered to be reliable at the time of publishing. However, DOMINANT Opto Technologies does not assume any liability arising out of the application or use of any product described herein.

DOMINANT Opto Technologies reserves the right to make changes to any products in order to improve reliability, function or design.

DOMINANT Technologies products are not authorized for use as critical components in life support devices or systems without the express written approval from the Managing Director of DOMINANT Opto Technologies.

About Us

DOMINANT Opto Technologies is a dynamic Malaysian Corporation that is among the world's leading SMT LED Manufacturers. An excellence – driven organization, it offers a comprehensive product range for diverse industries and applications. Featuring an internationally certified quality assurance acclaim, DOMINANT's extra bright LEDs are perfectly suited for various lighting applications in the automotive, consumer and communications as well as industrial sectors. With extensive industry experience and relentless pursuit of innovation, DOMINANT's state-of-art manufacturing, research and testing capabilities have become a trusted and reliable brand across the globe. More information about DOMINANT Opto Technologies can be found on the Internet at <http://www.dominant-semi.com>.

Please contact us for more information:

Head Quarter

DOMINANT Opto Technologies Sdn. Bhd.
Lot 6, Batu Berendam, FTZ Phase III, 75350 Melaka, Malaysia
Tel: (606) 283 3566 Fax: (606) 283 0566
E-mail: sales@dominant-semi.com

DOMINANT Opto Technologies Sdn. Bhd. Shanghai Representative Office

Rm 305, Hongwell International Plaza No. 1600 Zhong Shan(W) Rd, Xuhui District, Shanghai, China 200235
Tel: +86 21 5403 5655, +86 21 5403 5818 Fax: +86 21 5403 6055
E-mail: sales_china@dominant-semi.com

DOMINANT Opto Technologies Sdn. Bhd. Shenzhen Representative Office

Rm 1808, Block B, South International Plaza No 3013, Yitian Road, Futian District, Shenzhen, 518048 P.R. China
Tel: +86 755 8282 1781
E-mail: sales_china@dominant-semi.com

DOMINANT Korea Sales Office

DOMINANT Semiconductors Korea Inc.
RM 211 SUNTEAK CITY APT. 513-15 Sangdaewon-dong, Jungwon-gu, Seongnam-si, Gyeonggi-do, 462-725, Korea
Tel: +82-31-701-5203 Fax: +82-31-701-5204
E-mail: sales_korea@dominant-semi.com

DOMINANT U.S.A Sales Office

25 Rockaway Road, 08833 Lebanon, New Jersey, USA
Tel: (908) 439-9930 Cell: (908) 343-5810 Fax: (908) 439-9929
E-mail: don.wendel@dominant-semi.com

DOMINANT Europe Sales Office

DOMINANT Semiconductors Europe GmbH
Raiffeisenstr. 38, 74906 Bad Rappenau Germany
Tel: +49 (0) 7264-89010-10 / +49 (0) 7264-89010-11 Cell: +49 173-6907370 / +49 173-6907751
Fax: +49 (0) 7264-89010-29
E-mail: gerd.wachno@dominant-semi.eu; hartmut.wettengl@dominant-semi.eu

DOMINANT India Sales Office

C-11, Vasanth Business Centre #86, TTK Road, Alwarpet Chennai - 600 018, INDIA
Tel: 91-44-42030616 / 516 Cell: 91-9444920537 Fax: 91-9444920616
E-mail: pravat.behera@dominant-semi.com

