

Features:

- A, AD Type = IP66, NONE, D Type = IP67
- Built in PFC function (Active)
- Inrush current limit
- Wide input voltage (Universal input range)
- Over voltage protection
- Over current protection
- Outdoor LED lighting
- LED street lighting
- 5 year warranty

Option
 Blank : Cable for I/O connection
 A : Output voltage and constant current level
 can be adjusted through potential meter
 D : Constant current level adjustable
 through output cable with 1~10Vdc
 AD : A + D

Output voltage combination

Total output wattage

Series name




HSF100-S Specifications



MODEL		HSF100-12	HSF100-24	HSF100-36	HSF100-48	
INPUT	VOLTAGE, FREQUENCY	AC 100-240V (AC 90 ~ 264V or DC 127 ~ 370V), 50/60Hz (47 ~ 63Hz), Universal output				
	CURRENT [A]	110V	1.4 (I _o =100%)			
		220V	0.7 (I _o =100%)			
	EFFICIENCY [%]	110V	84 typ	85 typ	85 typ	85 typ
		220V	86 typ	88 typ	88 typ	88 typ
POWER FACTOR	110V	0.97 typ				
	220V	0.93 typ				
INRUSH CURRENT		30A typ (AC IN 110V I _o =100%), 60A typ (AC IN 220V, I _o =100%) at cold start				
OUTPUT	VOLTAGE [V]	12	24	36	48	
	VOLTAGE ADJ RANGE *NOTE1 [V]	10.8 ~ 13.5	22 ~ 27	33 ~ 40	43 ~ 53	
	CURRENT [A]	6.4	4	2.65	2	
	CURRENT ADJ RANGE *NOTE1 [A]	4.16 ~ 6.4	2.6 ~ 4	1.72 ~ 2.65	1.3 ~ 2	
	REGULATION, LINE [mV]	120 Max	120 Max	180 Max	240 Max	
	REGULATION, LOAD [mV]	120 Max	120 Max	180 Max	240 Max	
	RIPPLE MAX [mV]	120 Max	120 Max	150 Max	150 Max	
	RIPPLE NOISE MAX 1 [mV]	150 Max	150 Max	250 Max	250 Max	
	RIPPLE NOISE MAX 2 *NOTE1 [mV]	400 Max	400 Max	600 Max	600 Max	
	TEMPERATURE DRIFT [mV]	180 Max	360 Max	540 Max	720 Max	
RISE TIME [ms]	1000 Max (AC IN 100V I _o =100%)					
HOLDING TIME [ms]	17 typ (AC IN 100V I _o =100%)					
FUNCTION	OVER CURRENT PROTECTION [A]	Works at 95 ~ 110% of rating				
	OVER VOLTAGE PROTECTION [V]	14 ~ 19	28 ~ 38	41 ~ 58	54 ~ 77	
ELECTRICALLY ISOLATED	INPUT-OUTPUT	AC 3,000V 1 minute current 20 mA, DC 500V 100MΩ (At room temperature & humidity)				
	INPUT-CASE, FG	AC 2,000V 1 minute current 20 mA, DC 500V 100MΩ (At room temperature & humidity)				
	OUTPUT-CASE, FG	AC 500V 1 minute current 100 mA, DC 500V 100MΩ (At room temperature & humidity)				
ENVIRONMENT	OPERATING TEMP AND HUMID	-25 ~ +70°C (Required derating), 20 ~ 90% RH (Non condensing)				
	STORAGE TEMP AND HUMID	-20 ~ +75°C, 20 ~ 90% RH (Non condensing)				
	VIBRATION	10 ~ 55Hz at 1G, 3 minute period, 30 minutes along X, Y and Z axis				
	IMPACT	10G for 20ms, once on each X, Y and Z axis				
SAFETY	SAFETY REGULATION	CE, KC	CE, KC	CE, KC	CE, KC	
	CONDUCTED EMISSION	Built to meet EN55015				

NOTE1 : Type A, AD only

HSF100-S External View

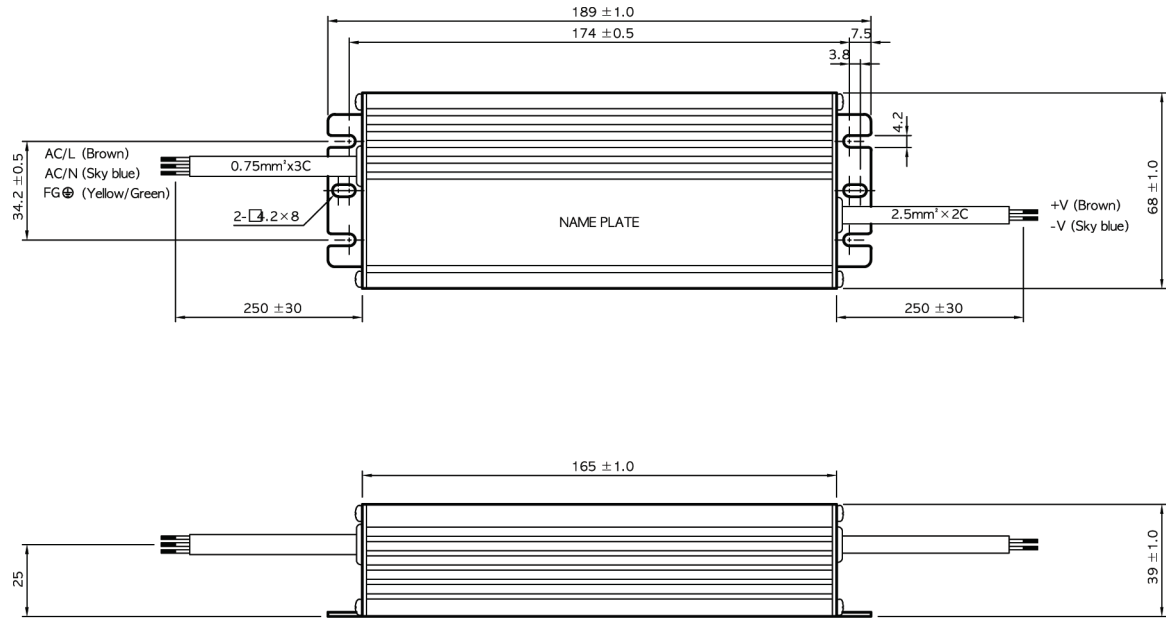

- * Weight : 830g
- * Tolerance : ± 1
- * Dimensions in mm