


ORDERING INFORMATION

EXAMPLE: **SPL-2 02R5**

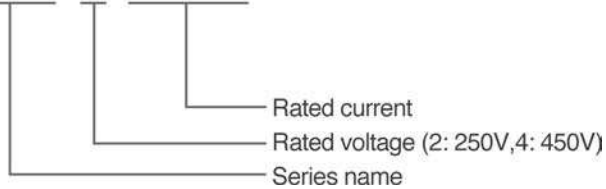

Features:

- Small size & light weight
- Low leakage





Application:

- Industrial equipments
- Digital equipments

SPL SERIES SPECIFICATIONS

MODEL	RATED VOLTAGE (AC/DC)	RATED CURRENT	LEAKAGE CURRENT (60Hz)	TEMPERATURE RISE	OPERATING TEMPERATURE RANGE	APPROVAL
SPL-2001	250V Max	1A	10mA Max	40°C Max	-25~+85°C	
SPL-201R6	250V Max	1.6A	10mA Max	40°C Max	-25~+85°C	
SPL-202R5	250V Max	2.5A	10mA Max	40°C Max	-25~+85°C	
SPL-203R6	250V Max	3.6A	10mA Max	40°C Max	-25~+85°C	

SPL SERIES SHAPES & DIMENSION / CUIT

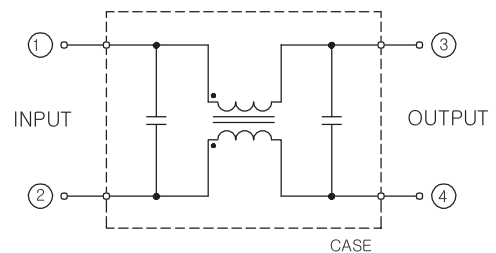

* Tolerance : ± 0.5
* Dimensions in mm

Rev No. 062013