

920 Series Midget Flanged Incandescent Lampholders

Overview

The 920 Series is a relampable midget flanged base lampholder. The mating lens cap accepts a T-1 3/4 midget flanged base incandescent lamp, held in the lens assembly by means of a friction fit which insures good contact and prevents the lamp from falling out when the lens is removed. A Littelite Lens Cap Assembly must be used with the holder to hold the lamp in proper relationship to the socket contact. Also available with RFI/EMI shielded lens to eliminate the possible transmission or reception of RF signals.

Approvals

UL Recognized and CSA Certified. For MIL Spec Lampholders, contact the factory.

Specification

Housing: Aluminum. Black anodized finish standard. Clear anodized or yellow iridescent chromate finish optional.

Internal Tooth Lockwasher & Hex Nut: Steel. Zinc-plated with yellow iridescent chromate finish.

Terminals: Brass. Tin-plated with elongated slot (3/64" x 3/32"). Tapered to accept a quick-connect receptacle.

Socket: Brass. Nickel-plated.


Lens: Heat resistant, high strength polycarbonate.

Lens Marking: Flat rotatable lenses may be stamped. Contact factory.

Lens Barrel: Brass. Nickel-plated.

Retainer: Aluminum. Black or clear anodized finish.

920 Series Maximum Rating: 1.12 Watts, 28 Volts.

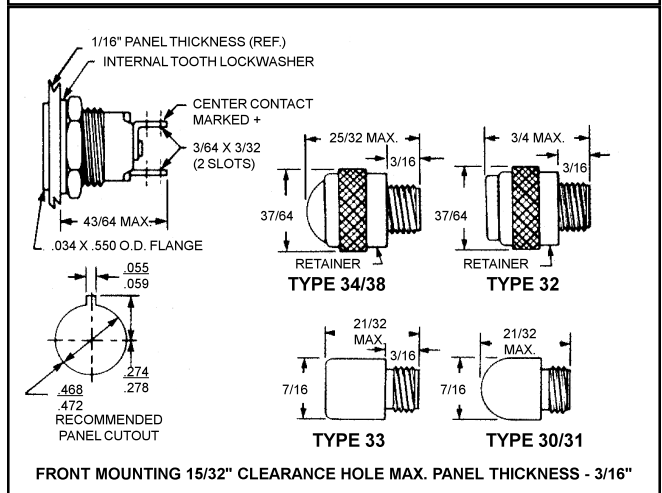

ORDERING INFORMATION: EXAMPLE: 9 2 0 4 0 1 X 31 0 RN									

921 Series Midget Flanged Neon Lampholders

Overview

The 921 Series is a relampable midget flanged base lampholder designed to accept T-2 neon midget flanged base lamps, including the C7A (NE-2D) Standard Brightness Lamp or the C9A (NE-2J) High Brightness Lamp. Also available with RFI/EMI shielded lens to eliminate the possible transmission or reception of RF signals.

Approvals

UL Recognized and CSA Certified. For MIL Spec Lampholders, contact the factory.

Specifications

Housing: Aluminum. Black anodized finish standard. Clear anodized or yellow iridescent chromate finish are optional.
Internal Tooth Lockwasher & Hex Nut: Steel. Zinc-plated with yellow iridescent chromate finish.


Terminals: Brass. Tin-plated with elongated slot (3/64" x 3/32"). Tapered to accept a quick-connect receptacle.

Socket: Brass. Nickel-plated.

Lens: Heat resistant, high strength polycarbonate.


Lens Barrel: Brass. Nickel-plated.

921 Series Maximum Rating: 3 Watts, 125 Volts.

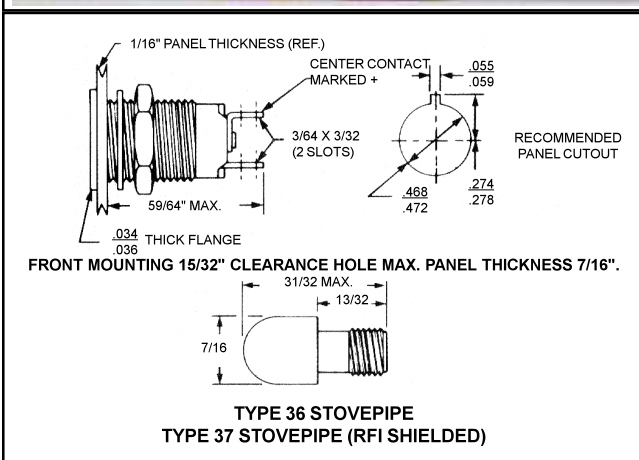

ORDERING INFORMATION:

EXAMPLE: 9 2 1 4 0 1 R 36 0 RN

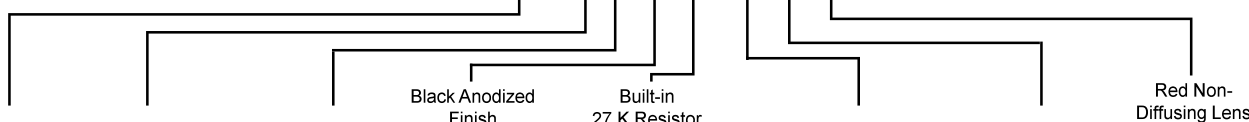

Series Number	Lampholders				Lens Cap Assembly		
	Termination	Features	Finish	Resistor	Lens Style	Retainer	Lens Color
921	4 Solder Lug Terminals	0 None	1 Black Anodized - Standard	R 27K OHM	36 Stovepipe	0 No Retainer	Nondiffusing (Clear)
			2 Clear (Silver) Anodized	D 62K OHM	37 ² Stovepipe - RFI/EMI Shielded		AN Amber CN Colorless RN Red WN White (Cloudy) YN Yellow

¹ See back page of Littelite section for Lampholder/Resistor Selection.

² Use with type 3 finish on lampholder.

924 Midget Flanged Incandescent Lampholders

Overview

The 924 Series are relampable midget flanged base lampholders. The mating lens cap accepts a T-1 3/4 midget base incandescent lamp, held in the lens assembly by means of a friction fit which insures good contact and prevents the lamp from falling out when the lens is removed. A Littellites Lens Cap Assembly must be used with the holder to hold the lamp in proper relationship to the socket contact.

Approvals

UL Recognized and CSA Certified

Specifications

Housing: Brass, Black nickel finish standard. Bright nickel or chrome finish optional.

Internal Tooth Lockwasher: Nickel-plated finish.

Hex Nut: Brass. 924 Series: Same finish as housing finish.

Terminals: Brass. Tin-lated with elongated slot (3/64" x 3/32"). Tapered to accept a quick-connect receptacle. Center contact marked +.

Socket: Brass. Bright nickel-plated.


Lens: Heat resistant, high strength polycarbonate.

Lens Marking: Flat rotatable lenses may be stamped. Contact factory.

Lense Barrel: Brass. Nickel-plated.

Lens Retainer: Brass. Black nickel finish. Bright nickel or chrome finish optional.

924 Series Max. Rating: 1.12 Watts, 28 Volts.

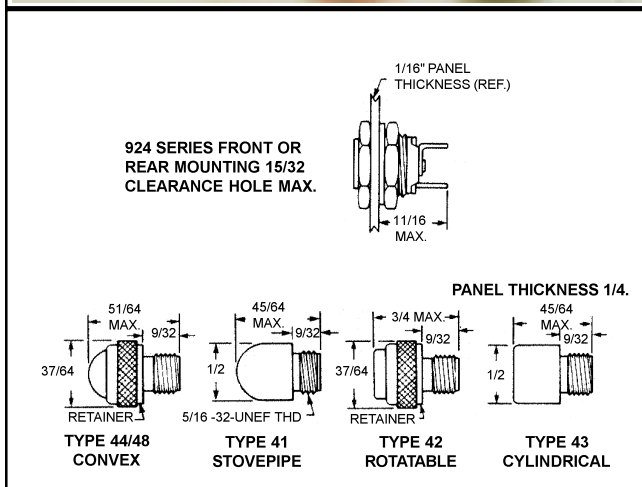

ORDERING INFORMATION: EXAMPLE: 9 2 2 4 0 4 X 42 4 BN												
					Black Nickel Finish		Flat Rotatable Lens		Black Nickel Retainer		Blue Non-Diffusing Lens	
Series Number	Lampholders				Lens Cap Assembly							
	Termination	Features	Finish	Resistor	Lens Style		Retainer		Lens Color			
924	4 Solder Lug Terminals	0 None	4 Black Nickel Standard	X None	41 Stovepipe	0 ² No Retainer	4 Black Nickel Finish (Standard)	AN Amber				
			5 Bright Nickel		42 ¹ Flat Rotatable				BN Blue			
			43 Cylindrical		44 Convex - Nondiffusing Colors Only					CN Colorless		
			48 Convex - Diffusing Colors Only								GN Green	
												RN Red
	WN White											
		YN Yellow										
			Translucent									
				WT White								

925, 926 & 927 Midget Flanged Incandescent & Neon Lampholders

Overview

The 925, 926 and 927 Series are relampable midget flanged base lampholders for drip proof applications. Use with T-1 3/4 incandescent or T-2 neon midget flanged base lamps. Lampholders are furnished with rubber gaskets and mate with skirted lenses, which have Neoprene O-rings installed.

Approval

UL Recognized and CSA Certified.

Specification

Housing & Knurled Ring Nut: Aluminum. Black anodized finish standard (Ring Nut Part No. 903-075-010). Clear anodized finish optional (Ring Nut Part No. 903-075-011).

Internal Tooth Lockwasher & Hex Nut: Steel. Zinc-plated and clear chromate treated.

Terminals: Brass. Tin-plated with elongated slot (3/64" x 3/32"). Tapered to accept a quick-connect receptacle. Center contact marked +.

Socket: Brass. Nickel-plated.


Lens: Heat resistant, high strength polycarbonate.

Lens Barrel: Brass. Nickel-plated.

Gasket: Silicone rubber.

"O" Ring: Neoprene.


925, 926, 927 Series Max. Rating: 3 Watts, 125 Volts.

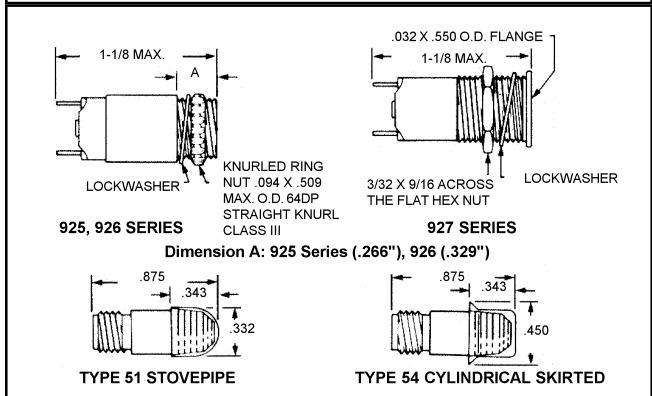

ORDERING INFORMATION:

Lampholders and lens caps may be ordered separately or as complete assemblies as shown in the example below:

EXAMPLE: 9 2 5 4 0 1 R 51 0 AN



Series Number	Lampholders				Lens Cap Assembly		
	Termination	Features	Finish	Resistor	Lens Style	Retainer	Lens Color
925 ¹	4 Solder Lug	0 None (standard) 2 ² Drip Proof	1 Black Anodized (standard) 2 Clear (Silver) Anodized	X None	FRESNEL (Use with nondiffusing lens colors only)	0 No Retainer	Nondiffusing
926 ¹				R 27K OHM for C9A (NE-2J) lamp	51 Stovepipe		AN Amber
927				D 62K OHM for C7A (NE-2D) lamp	52 Cylindrical Skirted Drip Proof		CN Colorless
					53 Cylindrical		GN ³ Green
					54 Cylindrical Skirted		RN Red
					SMOOTH (Use with translucent lens colors only)		WN White (Cloudy)
					56 Stovepipe		YN Yellow
					57 Cylindrical Skirted Drip Proof		Translucent ³
					58 Cylindrical		AT Amber
					59 Cylindrical Skirted		BT Blue
							GT Green
							RT Red
							WT White
							YT Yellow

¹ A mounting wrench, #097013, is available for tightening the knurled ring nuts.

² Requires Lens Cap Style 52 or 57.

³ Not recommended for use with neon lamps.

⁴ No resistor required for incandescent lamps.

¹ A mounting wrench, #097013, is available for tightening the knurled ring nuts.
² Requires Lens Cap Style 52 or 57.
³ Not recommended for use with neon lamps.
⁴ No resistor required for incandescent lamps.