

7000 Push Button Switches 16A 250Vac



- ▶ Round and rectangular push button switches
- ▶ Ratings up to 16A, 250V ac
- ▶ Latching and momentary
- ▶ Illuminated & non-illuminated
- ▶ Matching indicators
- ▶ Low profile version
- ▶ Panel cut outs:
25.0 dia
27.2 x 22.3

Approvals and specifications



16(4)A 250Vac T125
8(8)A 250Vac T85



UL CSA 16A Non Ind, 250Vac 1hp, 125Vac 1/2hp
UL 65°C, file no. E45221, CSA file no. LR10990
























3mm contact gap.

Technical data on pages 4 & 5 (switches), 6 (indicators).

C 7053 A F ---

TERMINAL FUNCTION ROCKER BODY PRINT, COLOUR, ETC

push
switches

TERMINAL		FUNCTION		ACTUATOR	
C  6.3 x 0.8 9.1	7000		Single pole ON - OFF		A Round actuator shown in F body 
	7001		Single pole ON - OFF (momentary ON)		A Round actuator shown in G body 
	7003		Single pole ON - OFF with light		B Round actuator - medium shown in F body 
	7004		Single pole ON - OFF (momentary ON) with light		
H  4.8 x 0.8 9.1	7050		Double pole ON - OFF		C Round actuator - long shown in F body 
	7051		Double pole ON - OFF (momentary ON)		
	7053		Double pole ON - OFF with light		D Round actuator - sub panel mount 
	7054		Double pole ON - OFF (momentary ON) with light		S Rectangular actuator Shown in "A" body N/A for 7030 
	7030		Indicator		
					



C7000AF ---



C7003AF ---



C7053CF ---



C7053BF ---



C7050SA ---



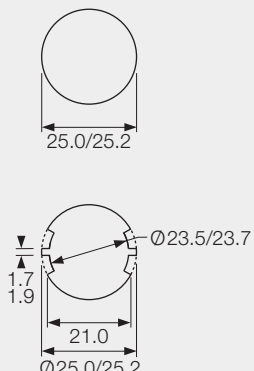

C7053AG ---



C7053DF ---



C7030AH ---

BODY	OPTIONS
<p>Panel cut-outs</p> <p>F H G Body types fit either cut-out</p>  <p>A</p>  <p>Cut-outs must be punched in the direction of insertion</p>	<p>Finish Matt finish is standard on bodies. Gloss finish is standard on actuators.</p> <p>Colour Call sales for custom colours. A full range is available for large orders.</p> <p>Legend printing A wide range is available or call sales for custom legends.</p> <p>Lamp voltage Call sales for details of available voltages.</p> <p>Weatherproof housing (E) Additional housing which fits round body switches with an oversize housing with a clear silicone cover designed to IP65. Mounting hole dia: 38.0mm</p>

DIMENSIONS (mm)

Panel thickness:

A 0.8 - 2.5mm

F, G, H 0.8 - 5.0mm

