

0916 - 0920 Push Button Switches 0.5A 250Vac

Approvals and specifications

In house test: **0.5A 250Vac T85** — Indicative rating only

μ contact gap.

Technical data on pages 4 & 5.

- ▶ Self wiping contacts
- ▶ Slow make & break
- ▶ Momentary action
- ▶ Choice of switch circuits
- ▶ Choice of actuators




T 0916 S O ---

TERMINAL FUNCTION ACTUATOR BODY COLOUR

▶ TERMINAL	▶ FUNCTION	▶ ACTUATOR	▶ BODY	▶ OPTIONS
T 3.3 1.2 5.0 Solder	0916 Black base SP ON-OFF (momentary ON) 0917 50V only Brown base SP ON-ON (momentary 1 side) 0918 White base SP ON-OFF (momentary OFF) 0919 Black base SP ON-ON (momentary 1 side) 0920 White base DP ON-OFF (momentary ON)	S Small Actuator L Large Actuator V Vandal Resistant IP66 Flat top Stainless steel 	Panel Cut-out (L & S Actuators) Panel thickness Both nuts - 2.5mm No backnut - 4.0mm Panel Cut-out (Stainless Steel V Actuator) Panel thickness - 8.0mm	Finish Gloss finish for L and S actuators. Colour Call sales for custom colours. A full range is available for large orders.


Dimensions (mm)

Nylon S and L actuators

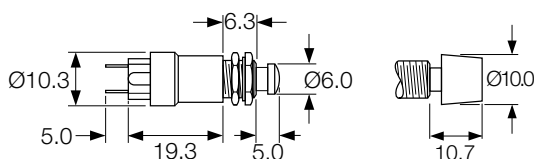

Neck thread - 40 TPI Whit. Actuator travel - 2.5 max

Stainless steel V actuator (IP66)

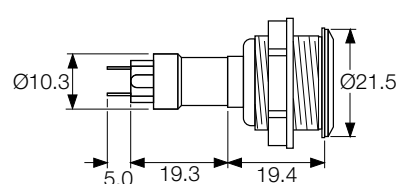

Neck thread - 26 TPI Whit. Actuator travel - 2.5 max