

1900 Vandal Resistant Switches - Designed to IP66

Approvals and specifications



3A 125/250Vac T85



5A 125/250Vac T85 50E3

Approvals apply to switch mechanism only.
μ contact gap.
Switching mechanisms are snap action (not sealed).

- ▶ Stainless steel button and bezel
- ▶ Vandal resistant construction
- ▶ Front panel sealed to IP66
- ▶ Single and double pole change-over switching




P 1911 V L

TERMINAL FUNCTION ACTUATOR BODY

▶ TERMINAL	▶ FUNCTION	▶ ACTUATOR	▶ BODY
P 	1911 ON - ON (momentary 1 side) Single pole	V Flat top (stainless steel) 	A Stainless steel Chamfer profile bezel Panel cut-out Panel thickness up to 4.0mm
T 	1961 ON - ON (momentary 1 side) Double pole	P Domed top (stainless steel) 	L Stainless steel Chamfer profile bezel Panel cut-out Panel thickness up to 4.0mm
X 			

Dimensions (mm)

Single pole (P1911VA shown)

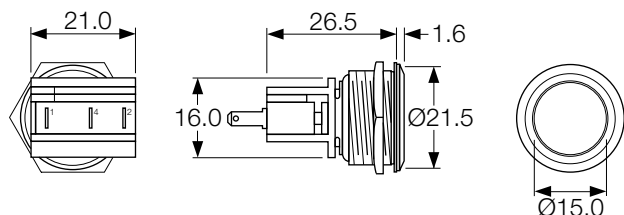

Double pole (P1961VL shown)

