

3140 Refrigerator Door Switches Splash resistant

Approvals and specifications



5A 250Vac 25T85 5E4 (50,000 Operations)



UL CSA 5A 250Vac

UL 85°C, file E45221, CSA file LR10990


3141, μ contact gap.

3145 and 3146, 3mm contact gap.

Technical data on pages 4 & 5.

Sealed terminals option available. Call sales for details.

- ▶ Door switches
- ▶ Ratings up to 5A, 250V ac
- ▶ Splash resistant
- ▶ Momentary action
- ▶ Choice of actuators
- ▶ 2 circuit switch

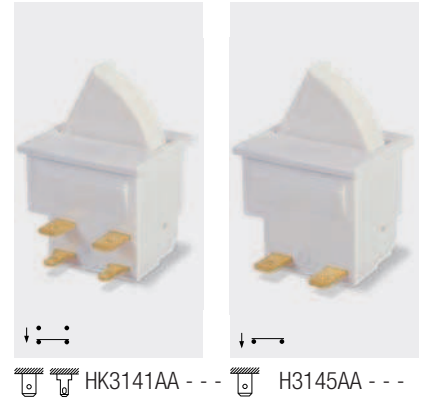

HK3141AA --- H3145AA ---

HK 3141 A A - - -

TERMINALS FUNCTION ACTUATOR BODY COLOUR, ETC

▶ TERMINAL	▶ FUNCTION	▶ ACTUATOR	▶ BODY	▶ OPTIONS
H 4.8 x 0.8 Standard format is H terminals in positions 1 & 2 and K terminals in positions 3 & 4 For sealed terminals call sales	 3141 ON - ON (momentary)	A B C D 	A 	Finish Gloss finish only Colour White is standard Call sales for custom colours. A full range is available for large orders. Reversed Actuators Also available with actuators reversed. Order as: 3151 (3141 type) 3155 (3145 type) 3156 (3146 type)
K 2.8 x 0.8	3145 ON - OFF (momentary OFF)			
	3146 ON - OFF (momentary ON)			

Dimensions (mm) ("A" actuator shown)

3141 uses terminals 1,2,3,4

3145 uses terminals 3,4

3146 uses terminals 1,2

For details of actuator travel and switching angles call sales.

