

9100 Pull Cord Switches 16(4)A 250Vac

Approvals and specifications



16(4)A 250Vac T125
16A 400Vac T125
8(8)A 250Vac T125 5E4 (50,000 Operations)




UL CSA 20A 277Vac, 250Vac 2hp, 125Vac 1hp
UL85°C, file no. E45221, CSA file no. LR10990

In house test: **30A 12V dc — Indicative rating only**

9100 pull cord switches have 45° indexing

3mm contact gap
 Technical data on pages 4 & 5

- ▶ Pull cord operation
- ▶ Ratings up to 16A, 250V ac; 20A, 28V dc
- ▶ 2 & 4 way rotary switch
- ▶ Pairs of single pole change over contacts
- ▶ Wide choice of switching circuits

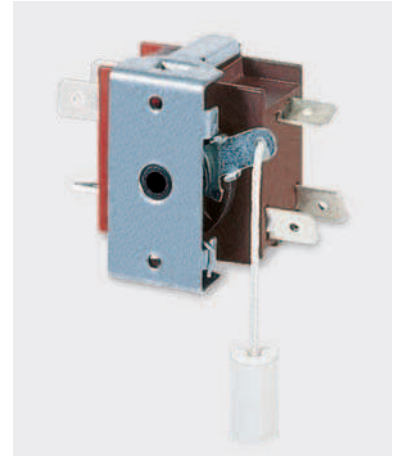

C9821PC ---

C 9 8 2 1 PC

TERMINAL SERIES PULL CORD POSITIONS CIRCUIT BODY

▶ TERMINAL	▶ SERIES	▶ POSITIONS/CIRCUIT	▶ BODY/MOUNTING
C 6.3 x 0.8 H 4.8 x 0.8 For approval information on H terminals, contact sales	98	21 Off 1 22 Off 1+3 41 Off 1+3, 2+4, 1+2+3+4 For other circuits please contact sales	PC 2 hole fixing

Dimensions (mm)

9100PC (C terminals shown)

