

FEATURES

WM15P-I Series 15W Wallmount Interchangeable AC Power Supply

- High Efficiency (Up to 86%)
- Constant Voltage
- Universal Input Voltage
- Level V & COC V4.0 Efficiency
- White Case Option
- Short Circuit, Over Voltage and Overload Protection
- UL/cUL60950, EN60950 UL/cUL60065, EN60065, CE & LPS
- RoHS Compliant



SPECIFICATION

Model		WM15P-xxI-x-x (See part number builder below)	
Output	Rated Voltage (1)	5-24V	
	Rated Power	10-15.6W	
	Ripple & Noise (2)	250mVp-p	
	Current Range	0.65-2A (10W @ 5V.)	
	Output Regulation	+/- 5%	
	Overshoot/Undershoot	10%	
	Turn On Delay (Max.)	2s	
	Hold-up Time	10ms @ 115Vac/60Hz max. load & 20ms @ 230Vac/50Hz	
Efficiency			
Input	Rated Voltage	100 ~ 240 Vac	
	Frequency Range	47Hz ~ 63Hz	
	Efficiency	79% (Min.)@full load & input 115 and 230VAC, Output 12V/ 1.3 A	
	Inrush Current	30A (At 100-240Vac input 25°C Cold Start.)	
	AC Current (Typ.)	0.2 A / 100-240 VAC	
Protections	Short Circuit	Hiccup mode, no damage shall occur and the power supply shall restart when the fault condition is removed	
	Over Voltage	Latch mode, recycle AC to restart power supply	
	Overload	Hiccup mode, at 150% (Max.) rated load and the power supply shall restart when the fault condition is removed	
Environment	Temperature Range	Operational	0°C ~ 40°C
		Storage	- 20 ~ +70°C
	Humidity	Operational	20% ~90% R.H
		Storage	20% ~90% R.H
Safety & EMC	Safety Standards	UL/cUL60950, EN60950, UL/cUL60065, EN60065, CE, LVD	
	No load Power Dissipation	< 0.3W	
	Insulation Resistance	Input to output: Min. 50M OHM at 500 VDC.	
	Dielectric Strength	Primary to Secondary: DC 4242 V , 3.5mA Max , for 3 seconds	
	Conducted & Radiated EMI	EN 55022 Class B, CISPR22 Class B and FCC part 15 Class B	
	EMS	EN 61000-4-2, EN 61000-4-3, EN 61000-4-4, EN 61000-4-5, EN 61000-4-6, EN 61000-4-8, EN 61000-4-11	




Others	MTBF	50,000 hours (Measured at 110Vac input, 100% Load and 25°C ambient temperature (MIL-HDBK-217F))
	Burn-in	4 Hours (Min.) at 40C (+/-5%) at full load
	Dimension (L*W*H)	74 x 29 x 50 mm (+/-0.5mm) – 2.9 × 1.14 × 1.87 inch
	Output Cable	1800mm, includes ferrite bead
	Weight	185 g
	RoHS	Complies with EU Directive 2011/65/EU
	WEEE	Complies with EU Directive 2002/96/EC
	EISA 2007	Complies with requirements for external power supplies.
	EU	Complies with EU Code of Conduct on external power supplies


Notes

- Output voltage tolerance +/-5%
- Max., Measuring is done by 20MHz bandwidth oscilloscope and terminated each output with a 22uF aluminum electrolytic capacitor and a 0.1uF ceramic capacitor. Full load, 25C ambient temperature at 115Vac and 230 Vac.

Mechanical

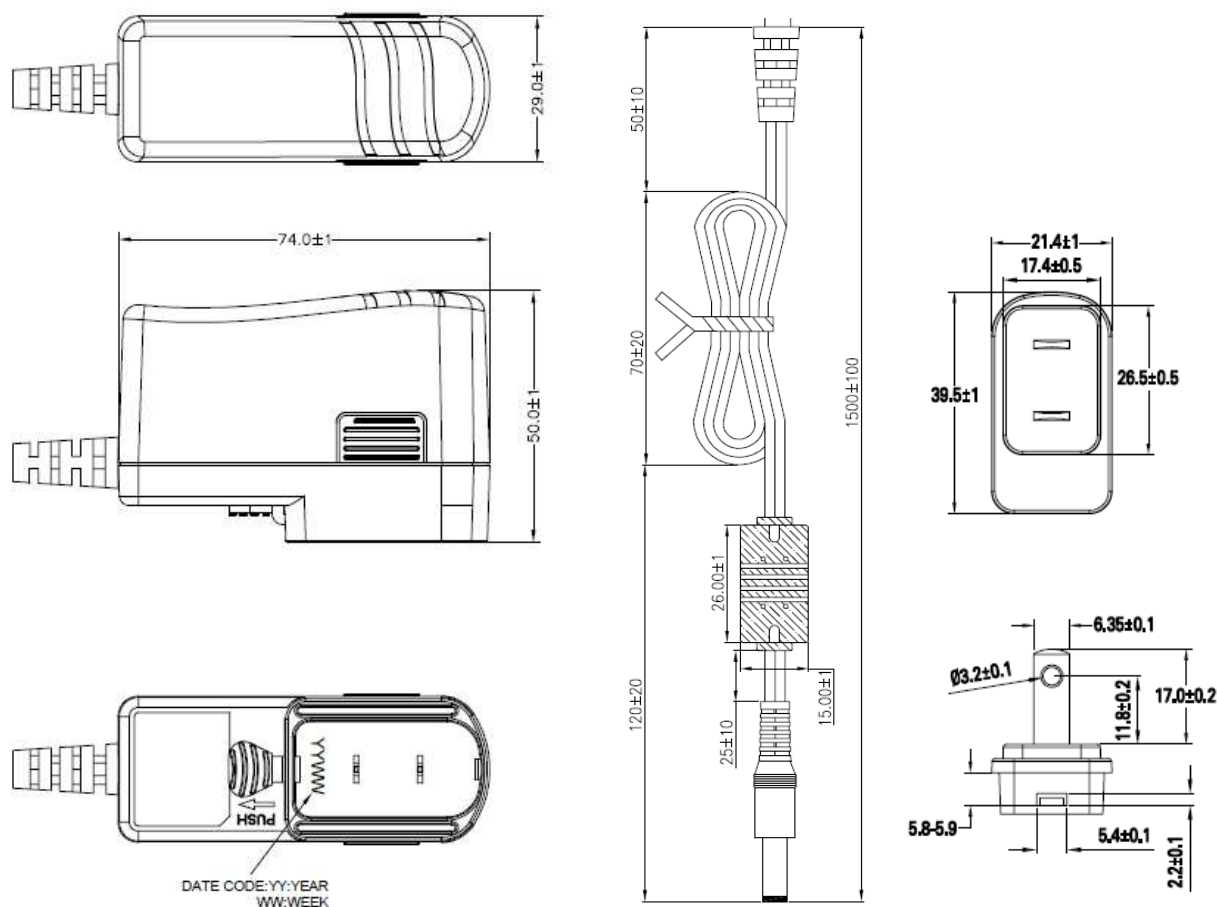

PART NUMBER BUILDER

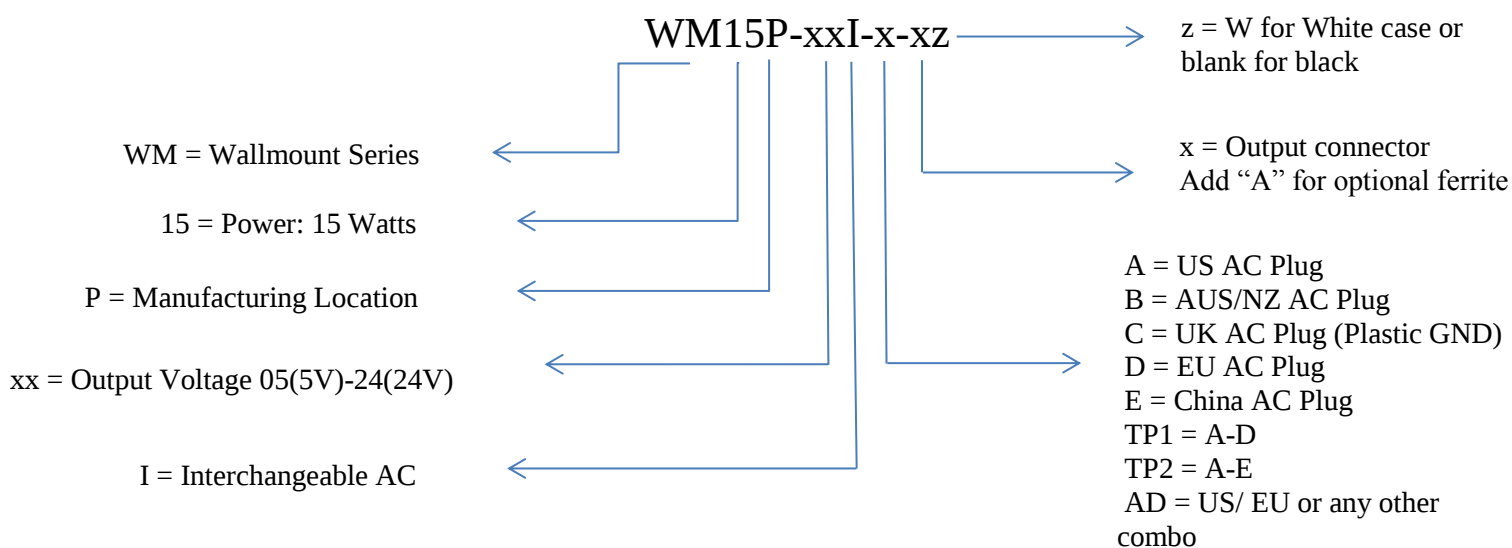

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE
AUTEC IS NOT RESPONSIBLE FOR ISSUES ARISING FROM ERRORS OR OMMISIONS

