

**FEATURES**

**250W Constant Voltage Led Driver**

**LSWV-250 Series**

- Wide AC Input 90~305VAC
- High Efficiency & High Power Factor
- Operation from -35°C~70°C
- IP67
- RoHS Compliant
- Certified to UL/cUL 8750



**SPECIFICATIONS**

Model #	Output Voltage	Output Current Range	PF (2)		Ripple & Noise (3)	Efficiency @ 220VAC (2)
			110VAC	220VAC		
LSWV-250S042ST	42V	0~5.95 mA	0.99	0.96	1.26V	92.0%





Output	Turn-on Delay Time	1s-2s				
	Line Regulation	1%				
	Load Regulation	3%				
Input	Voltage Range	90~305VAC				
	Frequency Range	47Hz~63Hz				
	Inrush Current	65A @ 230V				
	AC Current	2.5A / 110V 1.3A/220V				
Protections	Short Circuit Protection	Protection type: Hiccup mode, recovers automatically after fault condition is removed				
	Over Temperature Protection	110°C Internal temperature. Auto recovery after power supply cools.				
Environmental	Temperature Range	Operational	-35°C~60°C			
		Storage	-40°C~85°C			
	Humidity	Operational	10~100%RH non-condensing			
		Storage	5~100%RH			
Safety & EMC	Safety Standards	UL8750,UL935,UL1012,CSA-C22.2 No.107.1 EN61347-1,EN61347-2-13				
	EMI Conduction & Radiation	EN55015				
	EMS Immunity	EN61000-3-2,EN61000-3-3, EN61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-5, EN61000-4-6, EN61000-4-8, EN61000-4-11,EN61547				
Others	MTBF	345,000 hours				
	Life Time	63,000 hours				
	Weight	1100g				
	Dimensions	(L*W*H) 7.40*3.07*1.46 inches 188.5*78*37 mm				





Notes

1. All specifications are typical at 25°C unless otherwise stated.
2. The "Efficiency" & "PF" values are measured at full load, after the unit is thermally stabilized, otherwise they will be lower about 1%.
3. The "Ripple & Noise" values are measured by 20MHz bandwidth oscilloscope and the output paralleled a 0.1uF ceramic capacitors and a 10uF electrolytic capacitor.

**Mechanical Specifications**

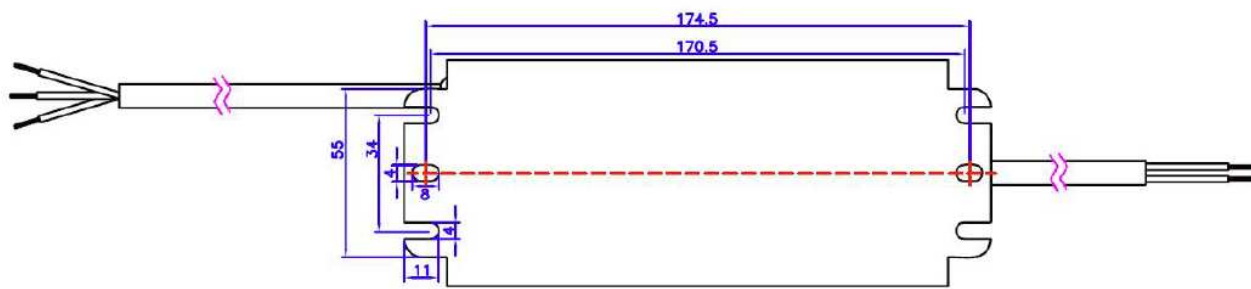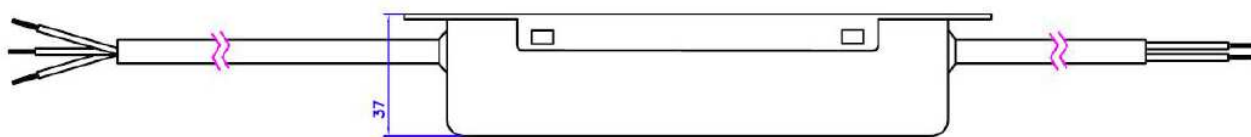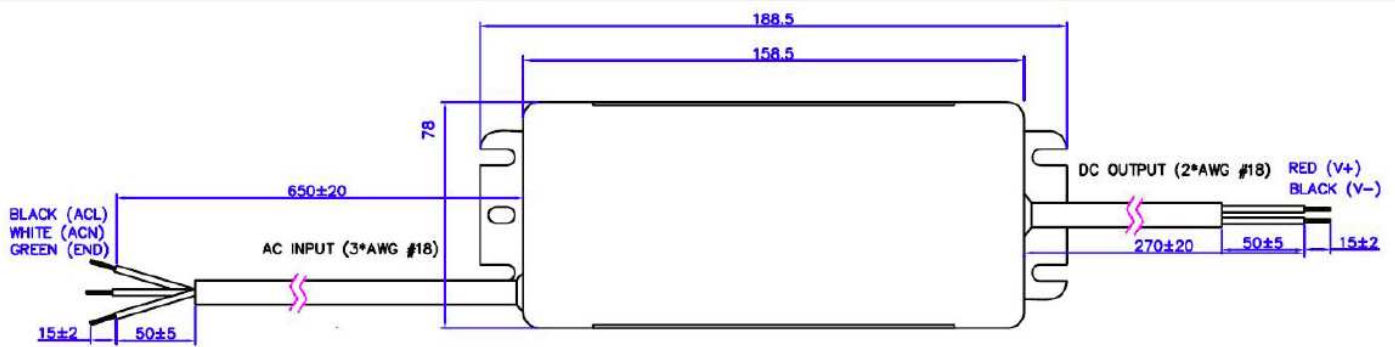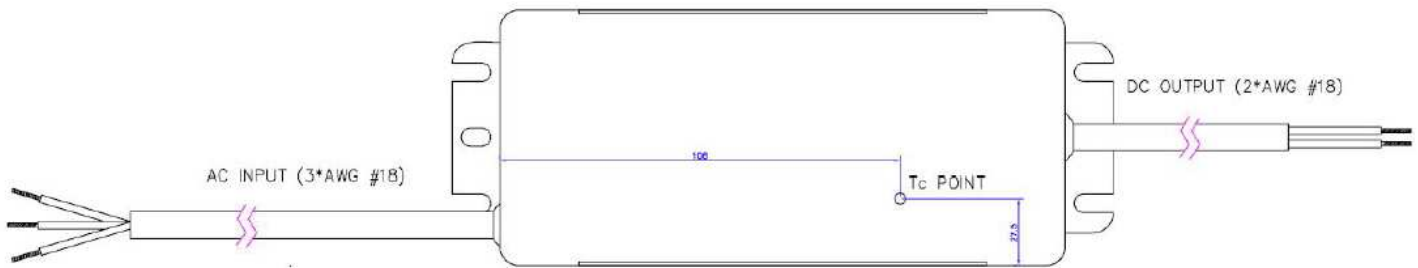


**Derating Curves**

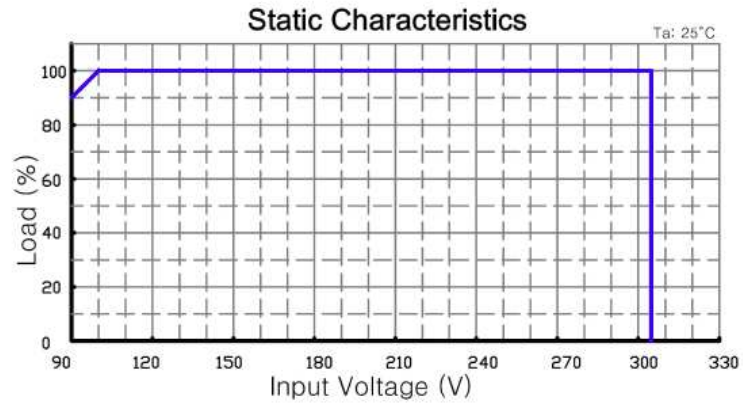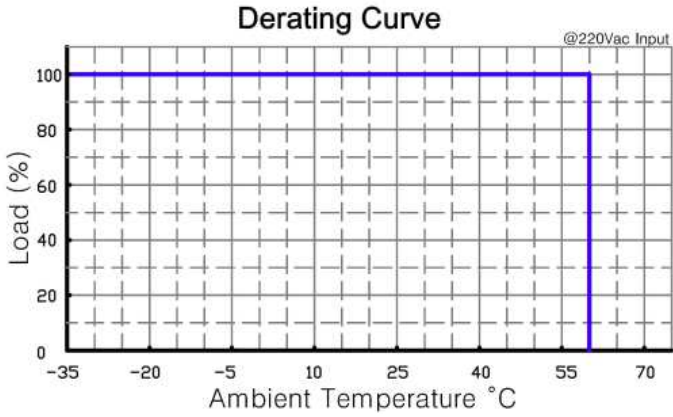

**PART NUMBER SCHEME**

**LSWV-250S042ST**

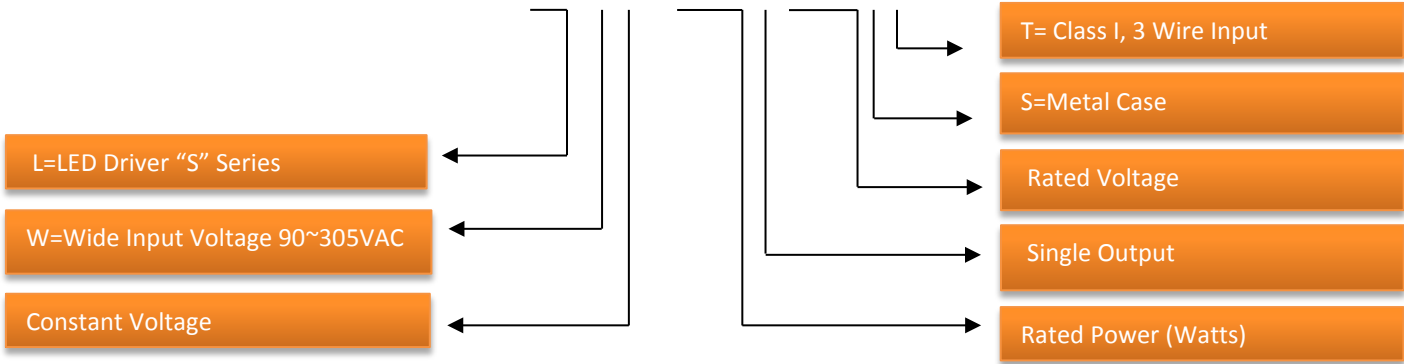

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AUTECH IS NOT RESPONSIBLE FOR ISSUES ARISING FROM ERRORS OR OMMISIONS

