



## Features & Benefits

- ☑ Easy to install LED luminaire, designed for exterior surfaces
- ☑ Low profile fixture that recesses 27mm into a 40mm diameter hole
- ☑ Direct burial IP67 connection boxes included
- ☑ Powered by a 12V DC, short circuit protected LED driver
- ☑ Sustainable and efficient SMD-LED that consumes only 0.3W of energy
- ☑ Cool to the touch; fixtures will not get hotter than 34°C
- ☑ UV-resistant lens and marine grade stainless steel (316) fixture
- ☑ Solid "walk/drive-over" construction, designed for loads up to 2850N/285kg
- ☑ Tested for operating conditions, ranging from -35°C to +65°C
- ☑ Available in LED colors: cool white, warm white, blue & amber

## Applications



- ☑ Tile, stone, pavers & concrete
- ☑ Decking & deck tiles
- ☑ Boat docks & piers
- ☑ Sidewalks & driveways

## Outdoor Basic


Eyeleds® Outdoor Basic is an innovative range of outdoor surface lighting, driven by energy efficient and long lasting LED technology. The range consists of architectural, recessed walk-over landscape lighting, and is available in the round lens style. Eyeleds® Outdoor is used as accent, orientation, marker, guide or night-lights in outdoor landscape designs, decking, pavers, tile, boat docks, piers, concrete sidewalks and driveways.

Eyeleds® Outdoor Basic, low profile LED light fixtures, install flush into most exterior surfaces. The fitting recesses into a 40mm diameter hole, drilled through the surface of the material. The fixtures are made of top quality materials and components that are resistant to corrosion and UV-radiation. The solid construction is engineered to withstand heavy use: walking or even driving over the lights is not a problem.


## Specifications

<b>Voltage</b>	12V DC
<b>Power Consumption</b>	0,3W/25mA
<b>Rated Life</b>	up to 100.000 Hours
<b>Materials</b>	
Lens	UV Res. Polycarbonate
Housing	UV Res. Polycarbonate
Trim Ring	Stainless Steel 316
Cable	PUR
<b>Cable</b>	2 x 0,75 mm <sup>2</sup>
<b>Surface Temperature</b>	Max. 34°C
<b>Operating Temperature</b>	-35°C to +65°C
<b>Drive/Walkover Pressure</b>	Max. 2850N/285kg
<b>Warranty</b>	3 Years Limited
<b>Standards</b>	CE  05 
<b>Environment</b>	IP67 Outdoor Rated


## Dimensions

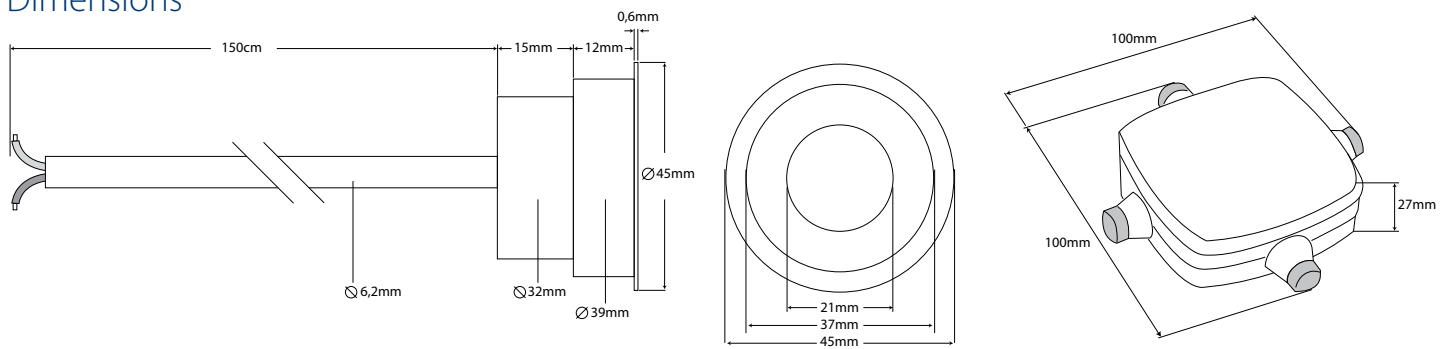

## Installation

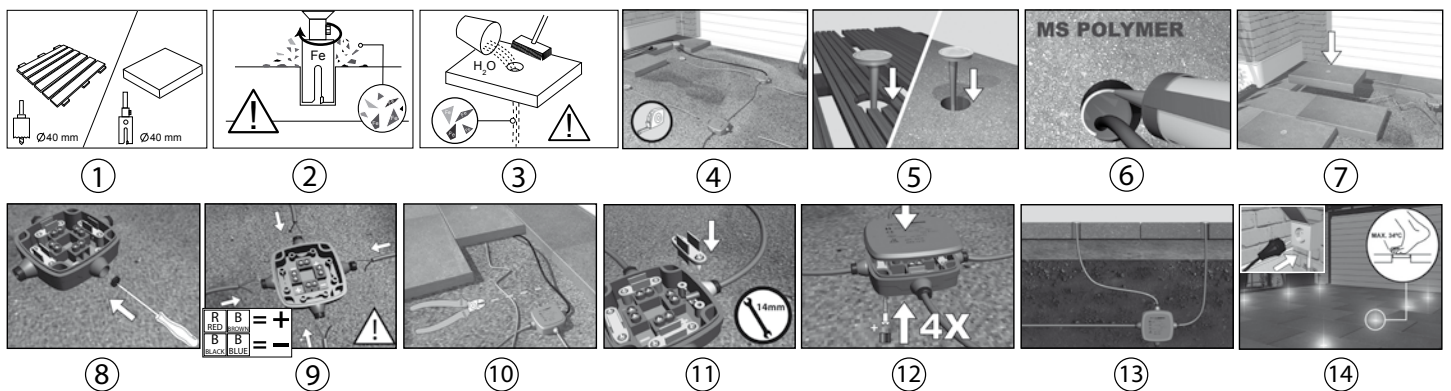

## Example Connection Diagram

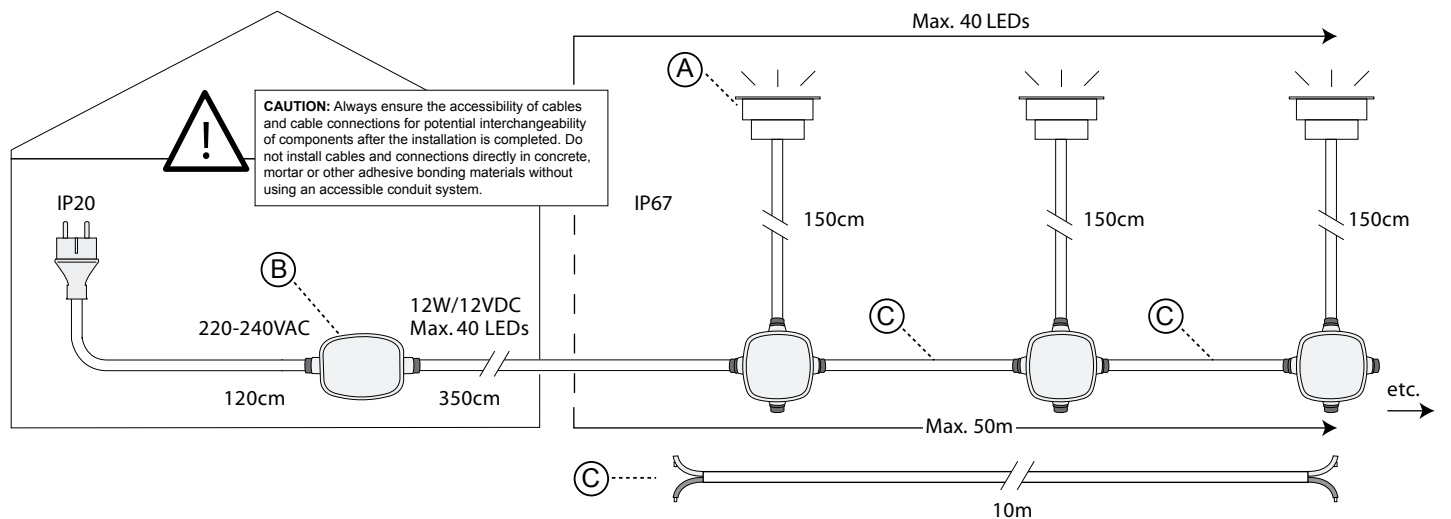

## Ordering Information

Product	Finish / LED Colour	Item Code	Accessory	#	Item Code
LED Unit + Connection Box (A)	Brushed Stainless Steel / Cool White LED	175.019.0U.03509	Power Supply EU 12V / 12W	(B)	AZ.16.00.05U
LED Unit + Connection Box (A)	Brushed Stainless Steel / Warm White LED	175.019.0U.40809	Power Supply UK 12V / 12W		AZ.88.00.05U
LED Unit + Connection Box (A)	Brushed Stainless Steel / Blue LED	175.019.0U.21609	Power Supply CH 12V / 12W		AZ.87.00.05U
LED Unit + Connection Box (A)	Brushed Stainless Steel / Amber LED	175.019.0U.04109	Connection Cable (10m)	(C)	AZ.20.00.05U