

NOTES:

1. ELECTRICAL SPECIFICATIONS:


CENTER FREQUENCY = 1621.400 MHz
 DEFINITION OF CENTER FREQ: MIDPOINT OF -10 dB S11 BANDWIDTH
 BANDWIDTH AT -10 dB S11: 25 MHz
 RETURN LOSS: -14 dB MIN. @ CENTER FREQUENCY
 BORE SIGHT AXIAL RATIO: 3 dB AT CENTER FREQUENCY
 GAIN: 4.0 dBiC AT CENTER FREQUENCY
 RIGHT HAND CIRCULAR POLARIZATION
 IMPEDANCE: 50 OHMS

2. SPECIFICATIONS ARE FOR UNPACKAGED ANTENNA.

3. FOOTPRINT AND ELECTRICAL SPECIFICATIONS ARE SUBJECT TO CHANGE.
CONSULT SPECTRUM CONTROL FOR SPECIFIC APPLICATIONS.

4. TESTING TO BE PERFORMED ON AN ALUMINUM GROUND PLANE, 2.362 [60MM] X 2.362 [60MM] INCHES, IN FREE SPACE.

5. DIMENSIONS IN BRACKETS IN MILLIMETERS.

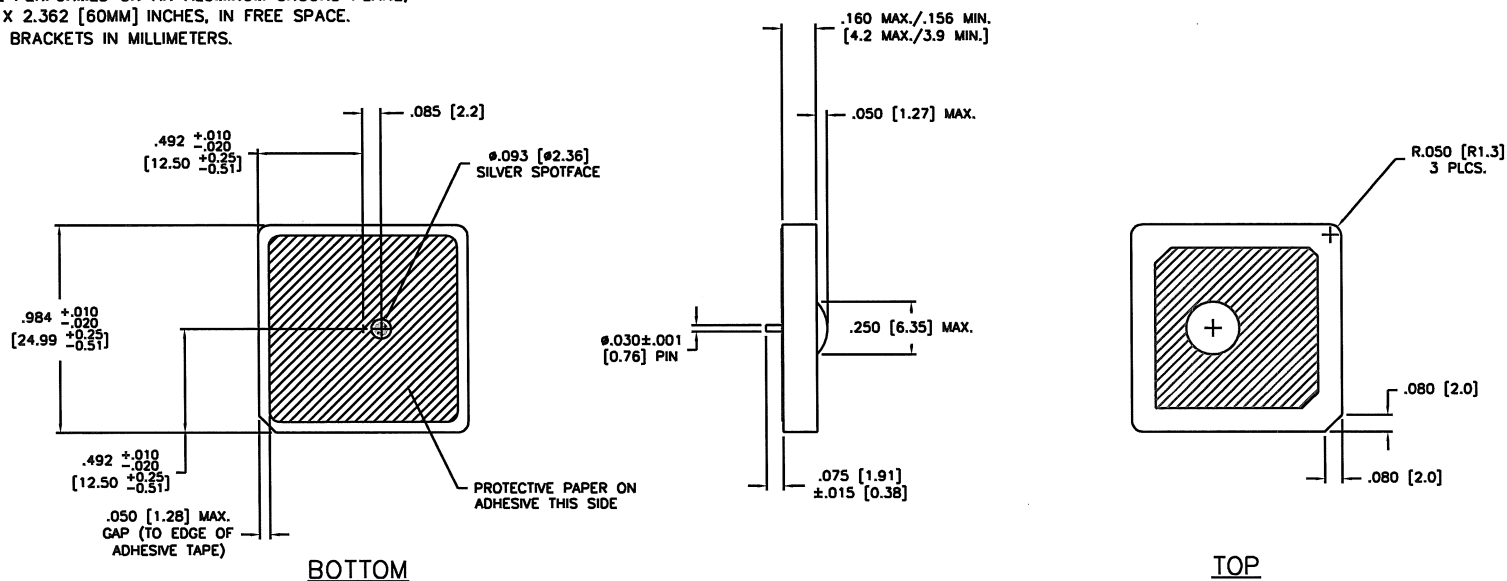

RoHS
COMPLIANT

[illegible]

Quality Products From The Specialists In Electro-Magnetic Compatibility