

Coaxial Adapter *SMA-F to 3.5mm-M*

50Ω DC to 26.5 GHz

SF-35M50+



CASE STYLE: DJ1735

Maximum Ratings

Operating Temperature -55°C to 85°C

Storage Temperature -55°C to 85°C

Permanent damage may occur if any of these limits are exceeded.

Features

- flat response
- excellent VSWR, 1.08 typ
- low cost adapters, available from stock
- rugged stainless steel body, passivated

Applications

- connector saver
- cable extender

Connectors	Model	Price	Qty.
Conn1 SMA-F	Conn2 3.5mm-M SF-35M50+	\$59.95 ea.	(1-9)


+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications at 25°C

Parameter	Condition (GHz)	Min.	Typ.	Max.	Units
Frequency Range		DC		26.5	GHz
Insertion Loss	DC - 26.5	—	0.1	—	dB
VSWR	DC - 8	—	1.04	1.25	:1
	DC - 18	—	1.08	1.25	
	DC - 26.5	—	1.10	1.26	

Outline Drawing


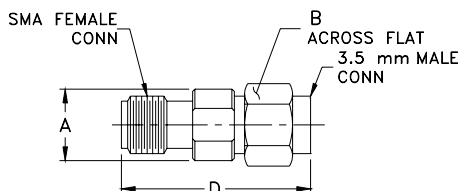


Outline Dimensions (inch mm)

A	B	C	D	E	wt
.311	.31	—	.83	—	grams
7.90	8	—	21	—	3.0

Typical Performance Data

Frequency (GHz)	Insertion Loss (dB)	VSWR (:1)	
		SMA-F	3.5mm-M
0.05	0.01	1.00	1.00
0.1	0.01	1.00	1.00
0.5	0.00	1.01	1.00
1	0.01	1.01	1.01
2	0.02	1.03	1.01
3	0.03	1.02	1.02
4	0.04	1.02	1.04
5	0.04	1.04	1.07
10	0.08	1.11	1.08
15	0.10	1.01	1.04
16	0.09	1.06	1.09
18	0.14	1.18	1.20
20	0.09	1.06	1.15
22	0.13	1.07	1.05
24	0.12	1.04	1.04
25	0.14	1.09	1.07
26	0.16	1.10	1.11
26.5	0.34	1.16	1.17

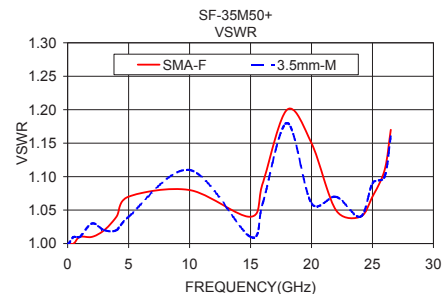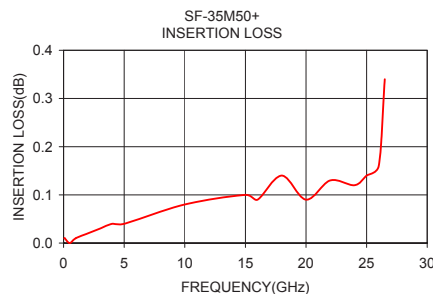

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.

C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 35166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. OR
M139937
SF-35M50+
RS/TD/CP/AM
130913
Page 1 of 1