

Coaxial Amplifier

50Ω Low Power 20 to 3000 MHz

ZJL-3G+



Features

- wideband, 20 to 3000 MHz
- compact rugged case, 1.07"x0.61" (including mounting bracket)
- low noise figure, 3.8 dB typ.
- protected by US Patent, 6,943,629

Applications

- communication systems
- radar
- instrumentation
- laboratory use

CASE STYLE: BW459			
Connectors	Model	Price	Qty.
SMA	ZJL-3G+	\$114.95 ea.	(1-9)

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Amplifier Electrical Specifications

MODEL NO.	FREQUENCY (MHz)		GAIN (dB)			MAXIMUM POWER (dBm)			DYNAMIC RANGE		VSWR (:1) Typ.		DC POWER	
	f_L	f_U	Typ.	Min.	Flatness ¹ Typ.	Output (1 dB Compr.) L	U	Input (no damage)	NF (dB) Typ.	IP3 (dBm) Typ.	In	Out	Volt (V) Nom.	Current (mA) Max.
ZJL-3G+	20	3000	19	14	±2.2	+8	+8	+13	3.8	+22	1.4	1.6	12	45

1. Flatness specified to 0.75 fU, dynamic range at 2 GHz.

Open load is not recommended, potentially can cause damage.

With no load derate max input power by 20 dB

L= low range (f_L to $f_U/2$)

U= upper range ($f_U/2$ to f_U)

Maximum Ratings


Operating Temperature -40°C to 75°C

Storage Temperature -55°C to 100°C

DC Voltage +13V Max.

Permanent damage may occur if any of these limits are exceeded.

Outline Drawing

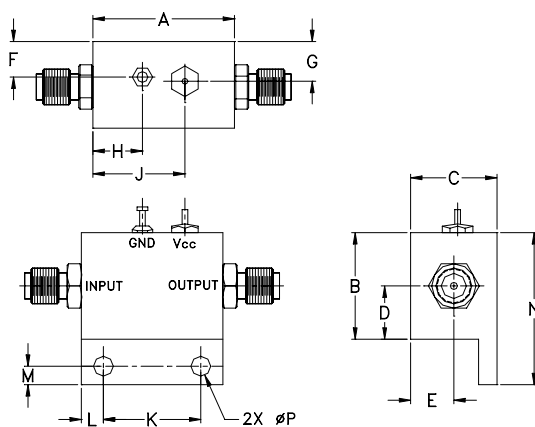

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	wt
1.00	.75	.61	.38	.29	.25	.26	.35	.65	.688	.156	.13	1.07	.140	grams
25.40	19.05	15.49	9.65	7.37	6.35	6.60	8.89	16.51	17.48	3.96	3.30	27.18	3.56	25

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.

C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp








www.minicircuits.com P.O. Box 35166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. B
M113397
ZJL-3G+
131009
Page 1 of 2

Typical Performance Data/Curves

ZJL-3G+

FREQUENCY (MHz)	GAIN (dB)			DIRECTIVITY (dB)			VSWR (:1)		NOISE FIGURE (dB)	POUT at 1 dB COMPR. (dBm)
	9V	12V	13V	9V	12V	13V	IN	OUT		
20.00	18.93	21.93	22.31	3.78	3.28	3.36	1.51	1.85	2.73	9.67
220.00	18.95	21.93	22.30	3.78	3.25	3.33	1.48	1.80	2.68	9.96
420.00	18.87	21.75	22.10	3.81	3.28	3.32	1.46	1.77	2.81	9.86
820.00	18.58	21.13	21.42	4.04	3.54	3.57	1.42	1.68	2.84	10.18
1020.00	18.38	20.75	21.02	4.13	3.65	3.63	1.37	1.59	2.78	9.98
1120.00	18.31	20.64	20.90	4.12	3.55	3.53	1.36	1.57	2.82	10.04
1320.00	18.16	20.40	20.67	4.21	3.49	3.43	1.34	1.52	2.79	9.92
1520.00	17.92	19.93	20.16	4.36	3.70	3.66	1.33	1.46	2.90	9.72
1920.00	17.38	19.21	19.41	4.78	3.87	3.75	1.32	1.36	2.94	9.58
2120.00	17.18	18.92	19.11	4.74	3.86	3.79	1.33	1.32	2.93	9.71
2220.00	17.06	18.77	18.95	4.83	3.90	3.79	1.34	1.31	2.90	9.89
2420.00	16.76	18.25	18.42	5.11	4.37	4.25	1.37	1.30	2.90	9.98
2620.00	16.58	17.94	18.08	4.97	4.35	4.34	1.40	1.30	2.91	10.01
2820.00	16.26	17.50	17.63	5.37	4.83	4.73	1.42	1.31	3.01	10.21
3000.00	15.94	16.95	17.06	5.88	5.54	5.45	1.44	1.32	3.09	10.45

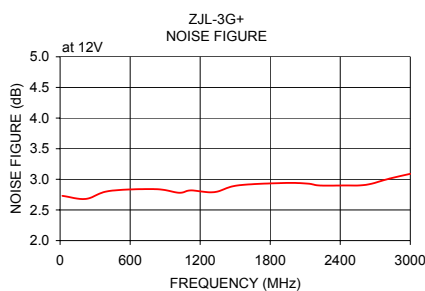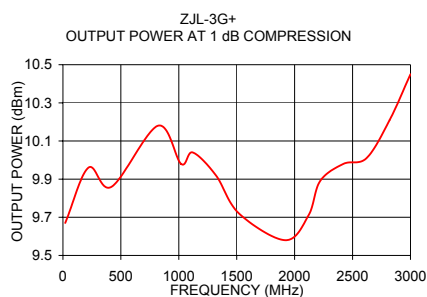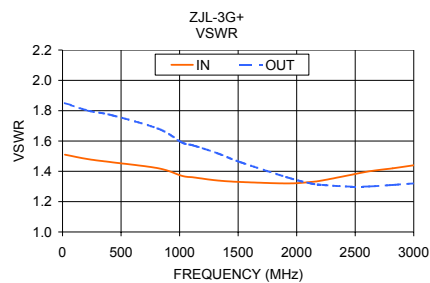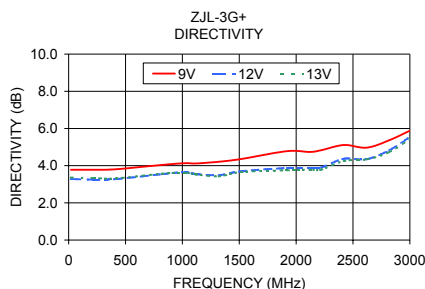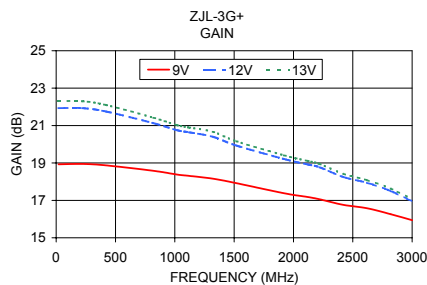

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

