

Coaxial High Power Amplifier

50Ω 5W 60 to 300 MHz

Features

- High power, +39dBm typ.
- Low noise figure, 3 dB typ.
- High IP3, +49 dBm typ.
- Class A amplifier
- Available with built-in fan with thermal shut-off

Applications

- VHF transmitters
- instrumentation
- test equipment



Model No.	ZHL-03-5WF(+)	▲ ZHL-03-5WFX(+)
Case Style	CP641	
Connectors	SMA	
Price (Qty.)	\$495.00 ea. (1-9)	\$445.00 ea. (1-9)

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


Electrical Specifications

Parameter	ZHL-03-5WF(+) ▲ ZHL-03-5WFX(+)			Units
	Min.	Typ.	Max.	
Frequency Range	60	—	300	MHz
Gain	30	—	—	dB
Gain Flatness	—	—	±1.0	dB
Output Power at 1dB compression	+36	—	—	dBm
Noise Figure	—	3.0	—	dB
Output third order intercept point	—	+49	—	dBm
Input VSWR	—	1.4	—	:1
Output VSWR	—	1.5	—	:1
DC Supply Voltage	—	24	—	V
Supply Current	—	—	2.8	A

Open load is not recommended, potentially can cause damage.
With no load derate max. input power by 20dB.

▲ Heat sink and fan not included. Alternative heat sinking and heat removal must be provided by the user to limit maximum base-plate temperature to 85°C, in order to ensure proper performance. For reference, this requires thermal resistance of user's external heat sink to be 0.08°C/W max.

Outline Drawing

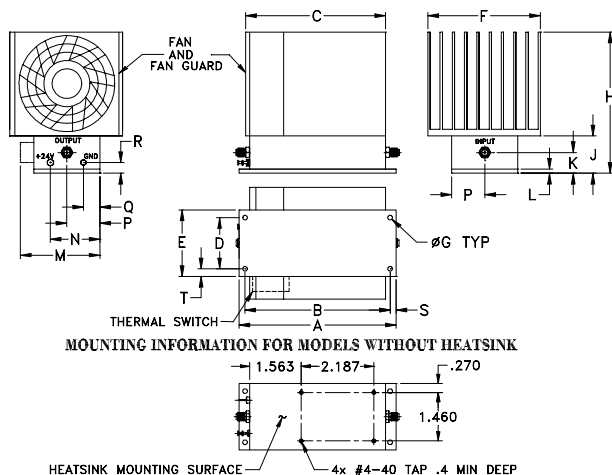

Maximum Ratings

Parameter	Ratings
Operating Temperature	-20°C to 65°C
Storage Temperature	-55°C to 100°C
Base Plate Temperature	85°C
DC Voltage	28V
Input RF Power (no damage)	+10 dBm

Permanent damage may occur if any of these limits are exceeded.

Outline Dimensions (inch mm)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	wt
4.75	4.375	4.18	1.540	2.00	3.36	.144	4.24	1.12	.58	.125	2.38	1.50	1.00	.50	.34	.19	.23	grams*
120.65	111.13	106.17	39.12	50.80	85.34	3.66	107.70	28.45	14.73	3.18	60.45	38.10	25.40	12.70	8.64	4.83	5.84	750

*290 grams without heatsink



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

For detailed performance specs
& shopping online see web site







Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. E
M138659
ZHL-03-5WF
120910
Page 1 of 2

Typical Performance Data/Curves

ZHL-03-5WF+ ZHL-03-5WF

FREQUENCY (MHz)	GAIN (dB)	DIRECTIVITY (dB)	VSWR (:1)		NOISE FIGURE (dB)	POUT at 1 dB COMPR. (dBm)	IP3 (dBm)
	24V	24V	IN	OUT	24V	24V	24V
60.00	35.21	9.38	1.18	1.74	3.85	38.73	48.61
80.00	35.31	8.95	1.24	1.57	3.51	39.38	49.22
100.00	35.38	8.91	1.28	1.50	3.40	39.53	49.62
140.00	35.46	9.08	1.32	1.44	3.14	39.35	49.47
160.00	35.52	9.02	1.33	1.41	3.05	39.26	49.45
180.00	35.56	9.03	1.34	1.39	3.02	39.79	49.57
200.00	35.58	9.04	1.37	1.38	2.99	40.07	49.47
240.00	35.61	9.39	1.50	1.45	3.00	39.99	49.24
260.00	35.59	9.71	1.59	1.54	3.00	39.72	49.16
300.00	35.46	10.32	1.81	1.78	3.05	39.40	48.87

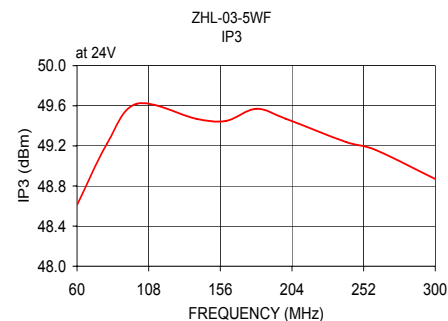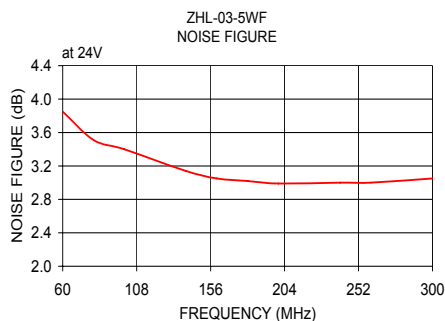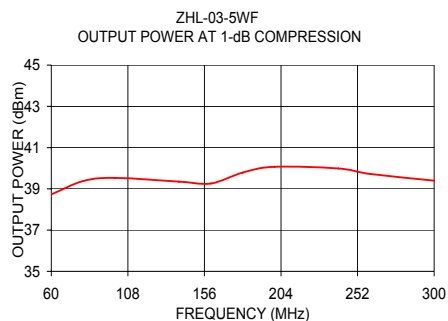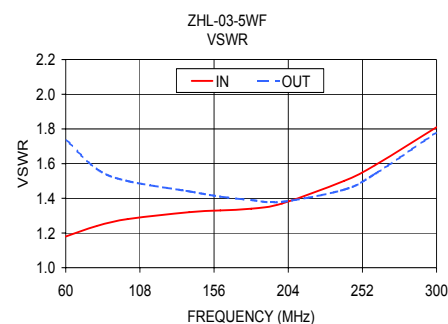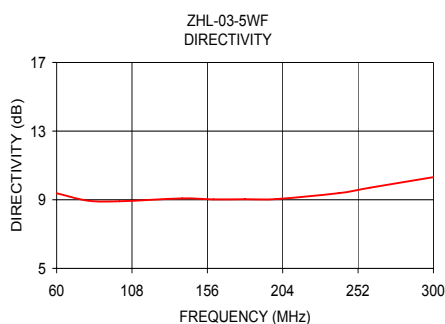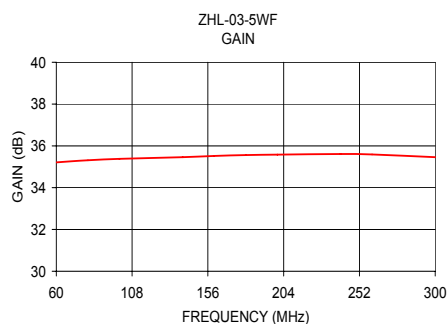

For detailed performance specs
& shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine minicircuits.com Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.