

Miniature Surface Mount Fixed Attenuator

LAT-10+ LAT-10

50Ω 0.5W 10dB DC to 2500 MHz



Maximum Ratings

Operating Temperature	-55°C to 85°C
Storage Temperature	-55°C to 100°C

Pin Connections

INPUT	4
OUTPUT	2
GROUND	1,3

Features

- wideband, DC to 2500 MHz
- excellent VSWR, through entire band
- miniature size, SOT143 package
- aqueous washable

CASE STYLE: MMM168
PRICE: \$1.95 ea. QTY (10-49)

**+ RoHS compliant in accordance
with EU Directive (2002/95/EC)**

*The +Suffix identifies RoHS Compliance. See our web site
for RoHS Compliance methodologies and qualifications.*

Applications


- cellular
- PCS
- ISM
- VHF/UHF

Electrical Specifications at 25°C

FREQ. RANGE (MHz)	ATTENUATION (dB) Flatness, Max.	VSWR (:1) Max.			MAX. INPUT POWER ¹ (W)
		DC-0.5 GHz	DC-1 GHz	DC-2.5 GHz	
f_L - f_U	Norm.	DC-0.5 GHz	DC-1 GHz	DC-2.5 GHz	
DC-2500	10±0.5	0.3	0.5	0.8	1.3
					1.4
					1.5
					0.5

1. RF power at 25°C case temperature: ½Watt. Derate linearly to 0.2 Watt at 85°C.
2. Flatness= variation over band divided by 2

Outline Drawing


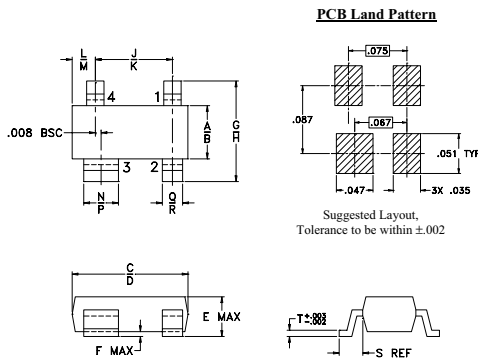


Outline Dimensions (inch)

A	B	C	D	E	F	G	H	J	K
.045	.055	.105	.120	.047	.005	.083	.104	.070	.080
1.14	1.40	2.67	3.05	1.19	0.13	2.11	2.64	1.78	2.03
L	M	N	P	Q	R	S	T	wt	
.018	.24	.030	.036	.015	.021	.023	.005	grams	
0.46	6.10	0.76	0.91	0.38	0.53	0.58	0.13	0.01	

Typical Performance Data

Frequency (MHz)	Attenuation (dB)	VSWR (:1)
1.00	10.15	1.13
10.00	10.16	1.13
50.00	10.18	1.13
100.00	10.21	1.13
500.00	10.26	1.13
1000.00	10.31	1.14
1600.00	10.37	1.17
2000.00	10.45	1.19
2250.00	10.54	1.20
2500.00	10.63	1.22

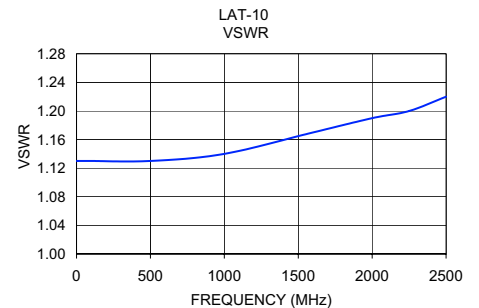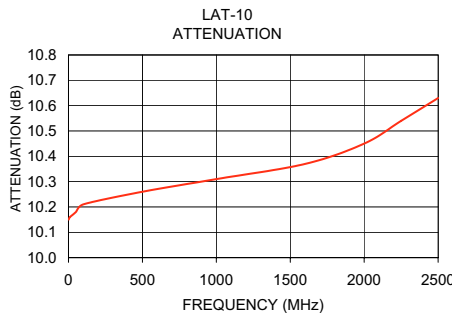

designers kit available

Kit No.	No. of Units in Kit	Description	Price \$ per Kit
K1-LAT	36	4 of ea. LAT-3(+), 6(+), 10(+), 15(+), 20(+) 2 of ea. LAT-1(+), 2(+), 4(+), 5(+), 7(+), 8(+), 9(+), 12(+)	59.95

Mini-Circuits®

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified



REV. D
M104321
LAT-10
060828