

Surface Mount Voltage Variable Attenuator

RVA-800+

50Ω 50 to 800 MHz


Maximum Ratings

Operating Temperature	-55°C to 85°C
Storage Temperature	-55°C to 85°C
Absolute Max. Supply Voltage(V+)	7V
Absolute Max. Control Voltage(Vctrl)	7V
Absolute Max. RF Input Level	+18 dBm
Permanent damage may occur if any of these limits are exceeded.	

Pin Connections

RF IN	2
RF OUT	10
V CONTROL	6
V+	14
GROUND	1,3,4,5,7,8,9,11,12,13,15,16


Outline Drawing

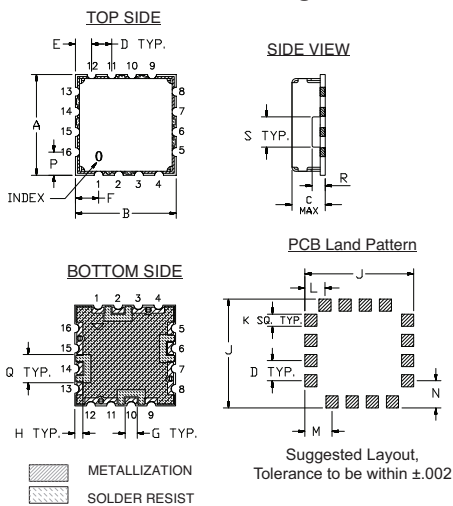

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J
.500	.500	.195	.100	.080	.115	.060	.040	.540
12.70	12.70	4.95	2.54	2.03	2.92	1.52	1.02	13.72
K	L	M	N	P	Q	R	S	Wt.
.060	.100	.135	.135	.115	.140	.070	.150	grams
1.52	2.54	3.43	3.43	2.92	3.56	1.78	3.81	1.0

Demo Board MCL P/N: TB-163 Suggested PCB Layout (PL-040)

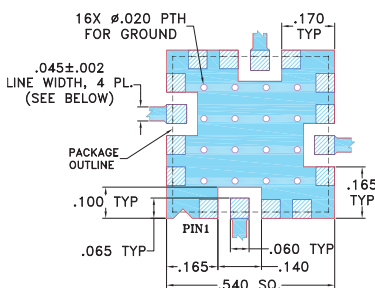

NOTE:
 1. TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS 0.025" ± 0.0025"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
 DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- Frequency range, 50-800 MHz
- Low Insertion Loss, 1.5dB Typ.
- IP3, +45 dBm Typ.
- Minimal phase deviation over attenuation range
- No external bias and RF matching network required
- Shielded case
- Aqueous washable



CASE STYLE: DV874
 PRICE: \$ 11.95 ea. QTY (10-49)

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Applications


- Video Modulator
- Power level control
- Feed forward amplifiers
- CATV

Electrical Specifications (T_{AMB} = 25°C)


FREQ. (MHz)	MIN. INSERTION LOSS, dB (+5V)		MAX. ATTENUATION dB (0V)		INPUT POWER (dBm)	CONTROL Voltage Current (V) (mA)		IP3 (dBm)	RETURN LOSS (dB)	POWER SUPPLY Voltage Current (V) (mA)	
	Min.	Max.	Typ.	Max.		Max.	Max.			Typ.	Typ.
50 - 800	1.5	3.0	9	7.5	+18	0 - 5	17	45	23	+5	4

Notes:
 Rise/Fall time: 10μSec / 20 μSec Typ.
 Switching Time, turn on/off: 25 μSec. Typ.


Equivalent Schematic

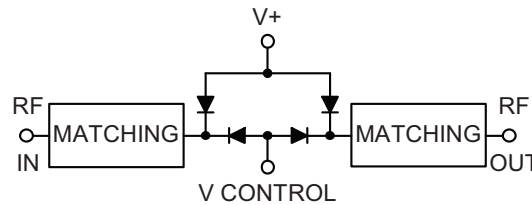


RVA-800+ TYPICAL ATTENUATION AT 500MHz

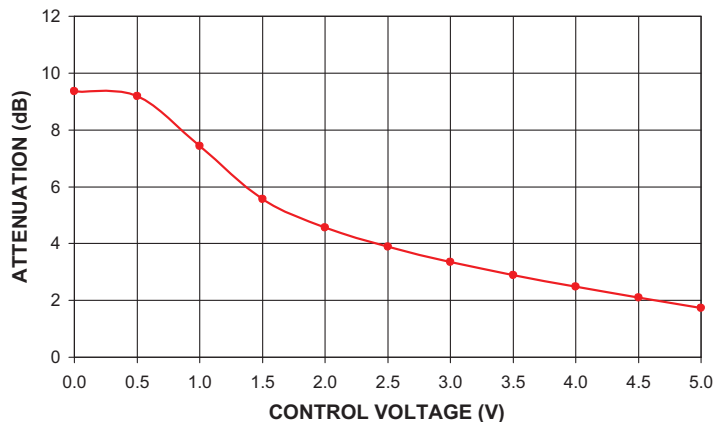


**RVA-800+
ATTENUATION Vs. FREQUENCY
OVER CONTROL VOLTAGES**

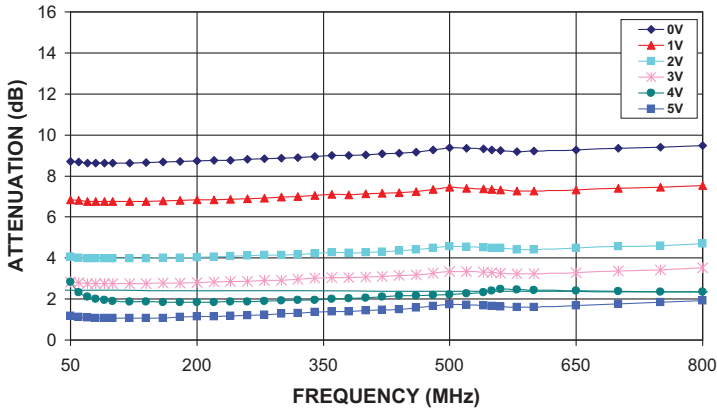


**RVA-800+
ATTENUATION Vs. INPUT POWER
OVER CONTROL VOLTAGES AT 500MHz**

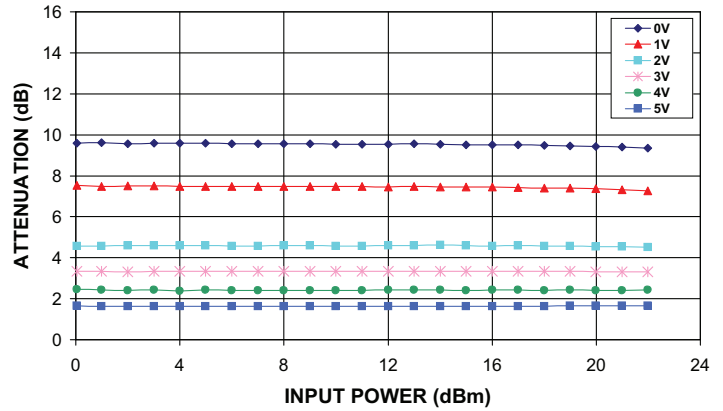


**RVA-800+
INPUT RETURN LOSS Vs. FREQUENCY
OVER CONTROL VOLTAGES**

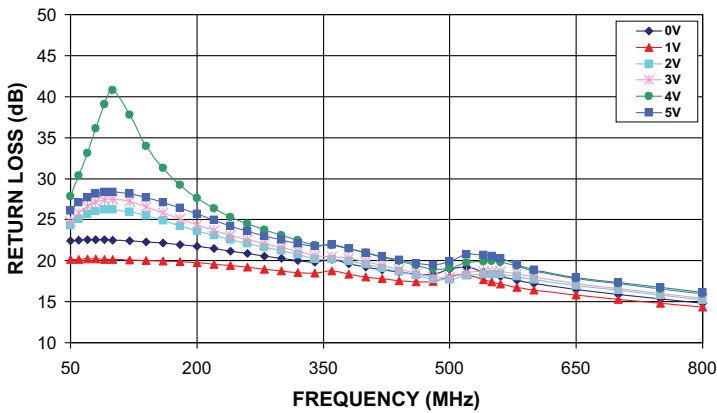

**RVA-800+
OUTPUT RETURN LOSS Vs. FREQUENCY
OVER CONTROL VOLTAGES**

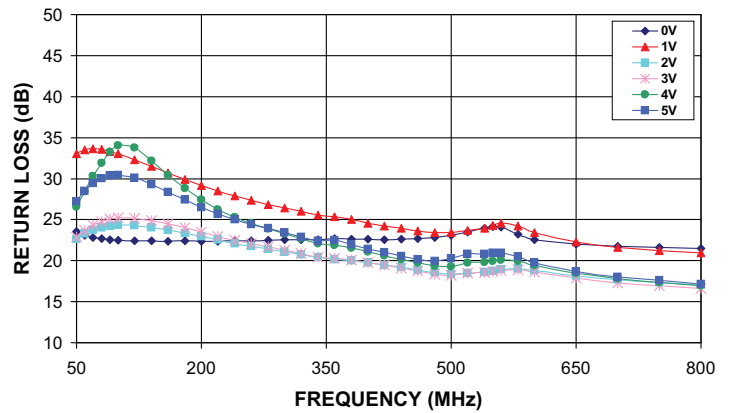

**RVA-800+
IP3 Vs. FREQUENCY
OVER CONTROL VOLTAGES**

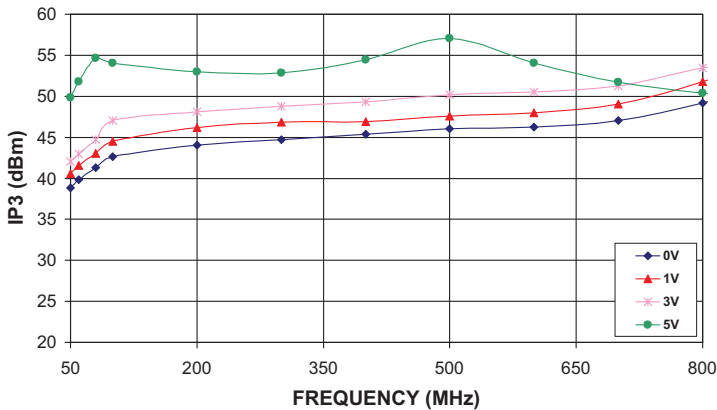

**RVA-800+
PHASE SHIFT Vs. FREQUENCY
OVER CONTROL VOLTAGES**

