

Surface Mount Directional Coupler

50Ω

10 to 750 MHz

TCD-10-1WX+



Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C

* Case temperature is defined as temperature on ground leads.
Permanent damage may occur if any of these limits are exceeded.


Pin Connections

INPUT	3
OUTPUT	4
COUPLED	1
GROUND	2
50Ω TERM EXTERNAL	6
NOT USED	5

Outline Drawing

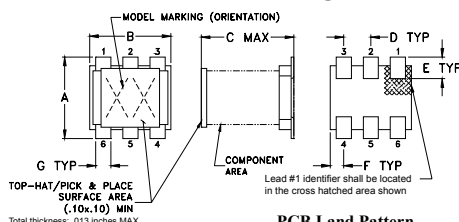


PCB Land Pattern



Outline Dimensions (inch)

A	B	C	D	E	F
.160	.150	.160	.050	.040	.025
4.06	3.81	4.06	1.27	1.02	0.64
G	H	J	K		wt
.028	.065	.190	.030		grams
0.71	1.65	4.83	0.76		0.15

Demo Board MCL P/N: TB-71 Suggested PCB Layout (PL-009)

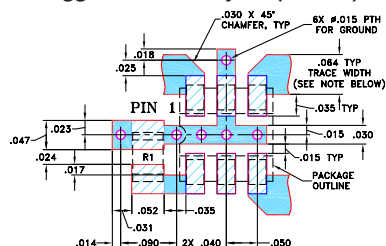

RESISTOR R1: 49.9 ± 1% 0hm, 0805 SIZE

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.030" ± 0.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.

2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

■ DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

■ DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Features

- wideband, 10 to 750 MHz
- low mainline loss, 1.2 dB typ.
- aqueous washable
- leads for excellent solderability
- protected by US Patent 6,140,887

Applications

- VHF/UHF
- signal sampling
- communications

CASE STYLE: DB1627
PRICE: \$1.49 ea. QTY (25)

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Reel Size	Available Tape and Reel at no extra cost
7"	20, 50, 100, 200, 500
13"	1000, 2000

Directional Coupler Electrical Specifications




FREQ. RANGE (MHz)	COUPLING (dB)		MAINLINE LOSS¹ (dB)						DIRECTIVITY (dB)						VSWR (:1)	POWER INPUT, W	
			L		M		U		L		M		U				
			Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Min.	Typ.	Min.	Typ.	Min.			
f _L -f _U	Nom.	Flatness															
10-750	10.3±0.5	+0.8	1.3	2.1	1.2	1.6	1.4	2.0	22	17	18	14	15	—	1.30	0.5	1.0

L = low range [f_L to 10 f_L] M = mid range [10 f_L to f_U/2] U = upper range [f_U/2 to f_U]


1. Mainline loss includes theoretical power loss at coupled port.

Typical Performance Data

Frequency (MHz)	Mainline Loss (dB) In-Out	Coupling (dB) In-Cpl	Directivity (dB)	Return Loss (dB)		
				In	Out	Cpl
9.00	1.18	10.17	22.87	17.95	27.94	17.96
15.00	1.18	10.14	22.85	18.48	30.46	18.53
24.00	1.18	10.13	22.75	18.67	31.68	18.74
30.00	1.18	10.14	22.68	18.71	31.90	18.79
50.00	1.20	10.16	22.53	18.77	31.89	18.87
70.00	1.21	10.16	22.38	18.78	31.59	18.90
100.00	1.21	10.17	22.13	18.78	30.97	18.93
300.00	1.25	10.31	19.54	18.13	26.04	18.34
500.00	1.32	10.49	16.70	17.08	22.79	17.34
800.00	1.47	10.73	13.13	15.61	19.73	15.58

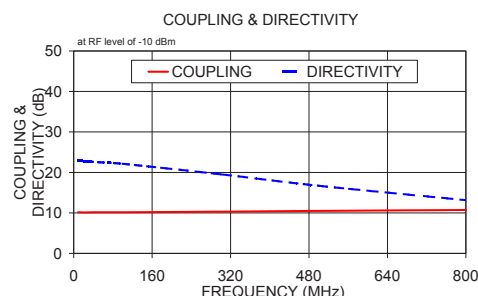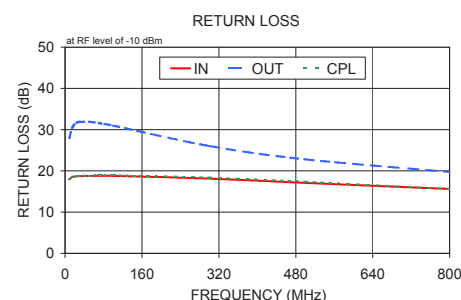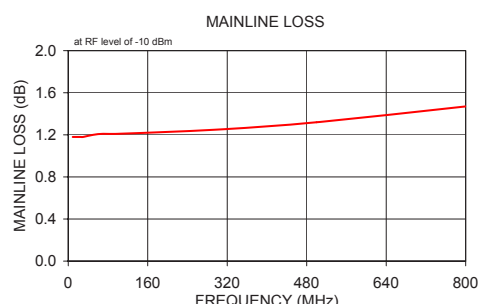

Electrical Schematic

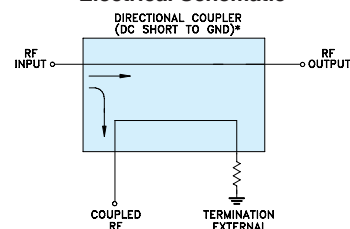

* ELECTRICAL SCHEMATIC IS FOR DIRECTIONAL COUPLER WITH INTERNAL TRANSFORMER(S) AND EXTERNAL TERMINATION.

Mini-Circuits®

www.minicircuits.com P.O. Box 35166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. OR
M13748
ED-8551
TCD-10-1WX+
WZ/TD/CP/AM
120105