

High Power

Bi-Directional Coupler

50Ω 14 dB Coupling DC Pass 1700 to 3400 MHz

BDCN-14-342+




Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
DC Current	0.5A
Permanent damage may occur if any of these limits are exceeded.	


Pin Connections

INPUT	1
OUTPUT	4
COUPLED (forward)	6
COUPLED (reverse)	3
GROUND	2,5

Outline Drawing



PCB Land Pattern




Suggested Layout,
Tolerance to be within ±.002

Outline Dimensions (inch/mm)

A	B	C	D	E	F
.126	.063	.035	.024	.022	.011
3.20	1.60	0.89	0.61	0.56	0.28
G	H	J	K		wt
.039	.024	.042	.123		grams
0.99	0.61	1.07	3.12		.020

Demo Board MCL P/N: TB-255+ Suggested PCB Layout (PL-131)

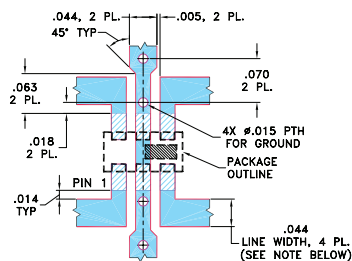

- TES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.020" ± 0.0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
3. DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
4. DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- four-port coupler
- wideband, 1700 to 3400 MHz
- excellent return loss, all ports
- ultra small size, hermetically sealed
- minimal variation with temperature variation
- protected by US Patent 7,049,905
- DC current through input to output 0.5A Max. at 1.0 watt RF input power

Applications

- UMTS • CDMA
- PCS • ISM
- GPS • DCS
- TDMA

CASE STYLE: FV1206-1

PRICE: \$2.99. ea. QTY (20)

\$2.11 ea. QTY (1000)

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications



Available Tape and Reel
at no extra cost

Reel Size	Devices/Reel
7"	20, 50, 100, 200, 500, 1000, 3000




Electrical Specifications at 25°C

Parameter	Condition (MHz)	Min.	Typ.	Max.	Unit
Frequency Range		1700	—	3400	MHz
Mainline Loss	1700-2100 2100-2700 2700-3400	— — —	0.4 0.45 0.4	0.55 0.6 0.55	dB
Nominal Coupling	1700-2100 2100-2700 2700-3400	— — —	14 13 15.5	— — —	dB
Coupling Flatness(±)	1700-2100 2100-2700 2700-3400	— — —	0.4 0.4 2.1	— — —	dB
Directivity	1700-2100 2100-2700 2700-3400	8 8 6	15 20 15	— — —	dB
Return Loss (Input)	1700-3400	—	20	—	dB
Return Loss (Output)	1700-3400	—	20	—	dB
Return Loss (Coupling)	1700-3400	—	20	—	dB
Input Power ¹	1700-3400	—	—	16	W


1. Derate linearly 8W at 100°C

Typical Performance Data

Frequency (MHz)	Mainline Loss (dB)	Coupling (dB)		Directivity (dB)		Return Loss (dB)			
	In-Out	In-Cpl Fwd	Out-Cpl Rev	Out-Cpl Fwd	In-Cpl Rev	In	Out	Cpl Fwd	Cpl Rev
1700.0	0.38	14.0	14.0	31.7	31.6	26.5	26.8	33.6	31.9
1900.0	0.41	13.6	13.6	33.4	33.1	26.9	27.8	35.4	33.5
2100.0	0.42	13.4	13.4	36.0	35.1	27.8	29.3	39.0	37.0
2300.0	0.43	13.3	13.3	40.2	37.9	28.4	30.6	41.2	45.0
2500.0	0.43	13.4	13.4	48.1	41.7	28.3	31.1	37.1	47.7
2700.0	0.42	13.7	13.7	52.6	46.1	27.7	30.6	34.7	41.8
2900.0	0.41	14.2	14.2	41.1	43.3	26.5	29.4	35.6	42.5
3100.0	0.40	14.9	14.9	36.1	37.9	25.2	27.7	38.9	43.7
3300.0	0.39	15.9	15.9	32.5	33.8	23.7	25.7	41.1	37.9
3400.0	0.38	16.6	16.5	31.1	32.2	23.0	24.8	36.5	34.0

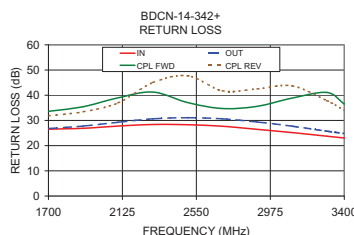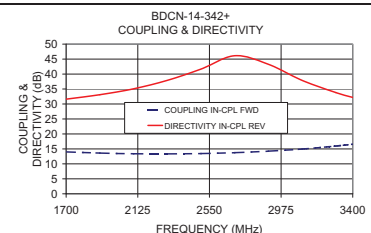

Electrical Schematic



A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.

C. The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 35166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. A
M139715
BDCN-14-342+
AD/CP/AM
130226