

25 dB DC Pass

High Power Directional Tap

ZARC-25-63+

50Ω 100W 2500 to 6000 MHz

The Big Deal

- High Power Handling, 100 W
- Excellent Mainline Loss, 0.27 dB typ.
- Very good VSWR, 1.2:1 typ.



CASE STYLE: AW1564

Product Overview

The ZARC-25-63+ high power directional tap is ideal for signal monitoring up to 100 W RF signals in microwave S- and C-band applications. The heavy-duty stripline module is housed in a rugged aluminum alloy case, with anodized aluminum heat sink and gold-plated SMA connectors. Overall dimensions are 3.00" x 2.81" x 2.03" high.

Feature	Advantages
0.25 dB typ. Mainline Loss	Extremely low internal power dissipation, reducing mainline loss and internal temperature for high reliability
VSWR 1.2:1 typ	Very good 50Ω impedance matching minimizes interference with signal integrity
DC Pass up to 1.5A	Suitable for applications using remote antenna control or other remote motorized requirements
100 W Input Power max.	High power capacity, combined with excellent insertion loss, supports operation in transmitters and base stations for radar, satellite, ISM, maritime, PMR, and line-of-sight communications

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp




25 dB DC Pass

High Power Directional Tap

ZARC-25-63+

50Ω 100W 2500 to 6000 MHz



CASE STYLE: AW1564

Connectors	Model	Price	Qty.
SMA	ZARC-25-63-S+	\$89.95	(1-9)

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input	100W max.
DC Current (IN-OUT)	1.5A

Permanent damage may occur if any of these limits are exceeded.

Coaxial Connections

INPUT	1
OUTPUT	2
COUPLED	3

Features

- excellent mainline loss, 0.27 dB typ.
- good VSWR, 1.2 typ.

Applications


- cellular
- PCS
- ISM
- instrumentation

Electrical Specifications at 25°C

Parameter	Condition (MHz)	Min.	Typ.	Max.	Unit
Frequency Range		2500		6000	MHz
Mainline Loss (above theoretical 0.014 dB)	2500	—	0.23	0.4	dB
	4500	—	0.27	0.4	
	6000	—	0.27	0.5	
Coupling* (IN-CPL)	2500 - 6000		25.3		dB
	2500	25.0	26.0	27.2	
	4500	22.3	23.5	24.7	
Coupling Flatness (±)	2500 - 4500	—	1.3	1.6	dB
	4500 - 6000	—	1.1	1.4	
Return Loss (Input)	2500	16	19	—	dB
	4500	16	20	—	
	6000	16	23	—	
Return Loss (Output)	2500	16	19	—	dB
	4500	16	20	—	
	6000	16	23	—	
Return Loss (Coupling)	2500	16	20	—	dB
	4500	16	20	—	
	6000	12	14	—	
Input Power	2500 - 6000	—	—	100	W

* Coupling can be used for forward direction only.


Outline Drawing

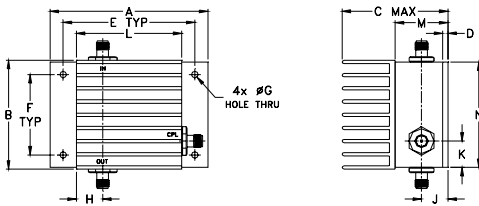

Outline Dimensions (inch mm)




A	B	C	D	E	F	G
3.00	2.06	2.03	.10	2.500	1.525	.125
76.20	52.32	51.56	2.54	63.50	38.74	3.18
H	J	K	L	M	N	wt
.50	.50	.50	2.00	1.00	2.00	grams
12.70	12.70	12.70	50.80	25.40	50.80	230

Electrical Schematic



Typical Performance Data

Frequency (MHz)	Mainline Loss (dB)		Coupling (dB)		Return Loss (dB)		Cpl
	In-Out	In-Cpl	Out-Cpl	In	Out		
2500.00	0.22	26.10	23.96	19.97	19.79	20.36	
3000.00	0.28	25.09	26.62	17.69	17.65	22.87	
3500.00	0.29	24.35	20.14	17.33	17.06	19.52	
4000.00	0.29	23.90	15.99	18.17	17.80	22.65	
4500.00	0.28	23.62	13.83	20.41	20.67	22.28	
5000.00	0.28	23.78	12.17	23.17	23.00	16.57	
5500.00	0.25	24.28	11.96	32.48	35.10	22.94	
5600.00	0.24	24.40	12.05	34.25	37.03	28.03	
5800.00	0.24	24.73	12.33	28.31	28.74	24.44	
6000.00	0.25	25.45	14.63	23.71	23.58	18.07	

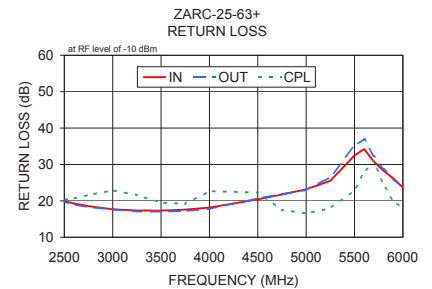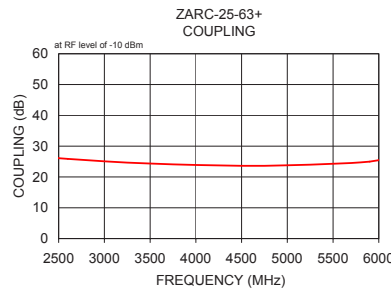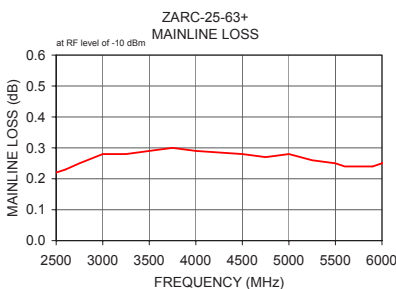

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 35166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. OR
M129555
ED-14168/1
ZARC-25-63+
CH/CP/AM
131017
Page 2 of 2