


# Plug-In Directional Coupler

## PDC-10-6+ PDC-10-6

50Ω 0.005 to 20 MHz



CASE STYLE: A01  
PRICE: \$31.20 ea. QTY. (1-9)

### Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Permanent damage may occur if any of these limits are exceeded.	

### Pin Connections

INPUT	1
OUTPUT	4
COUPLED	3
GROUND	2,5,7,8
CASE GROUND	2,5,7,8
NOT USED	6

### Features

- excellent directivity, 40 dB typ.
- low mainline loss, 0.4 dB typ.
- rugged welded construction, hermetically sealed

### Applications

- HF
- amateur radio
- instrumentation

**+RoHS Compliant**  
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

### Directional Coupler Electrical Specifications


FREQ. (MHz)	COUPLING (dB)		MAINLINE LOSS <sup>1</sup> (dB)						DIRECTIVITY (dB)						VSWR (:1)	POWER INPUT, W		
	Nom.	Flatness	L		M		U		L		M		U			Typ.	L	MU
			Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Min.	Typ.	Min.	Typ.	Min.				
$f_L$ - $f_U$																		
0.005-20	11.0±0.5	±0.5	0.4	1.2	0.4	0.8	0.4	1.0	40	30	40	30	35	25	1.3	1.5	3.0	

L = low range [ $f_L$  to 10  $f_L$ ] M = mid range [10  $f_L$  to  $f_U/2$ ] U = upper range [ $f_U/2$  to  $f_U$ ]  
1. Mainline loss includes theoretical power loss at coupled port.

### Typical Performance Data




Frequency (MHz)	Mainline Loss (dB) In-Out	Coupling (dB) In-Cpl	Directivity (dB)	Return Loss (dB)		
				In	Out	Cpl
0.005	0.47	11.60	38.37	17.44	17.44	17.05
0.04	0.36	11.47	38.70	26.71	28.77	27.26
0.10	0.35	11.46	39.03	27.29	29.80	28.07
0.50	0.36	11.47	39.15	27.43	29.88	28.13
1.00	0.36	11.47	39.21	27.29	30.04	28.19
6.00	0.38	11.50	39.42	26.42	29.96	28.19
11.00	0.39	11.53	38.41	25.67	28.62	26.90
16.00	0.41	11.56	35.76	24.84	27.12	25.30
19.00	0.42	11.59	33.75	24.34	26.19	24.33
20.00	0.42	11.60	33.02	24.21	25.92	23.97

### Outline Drawing

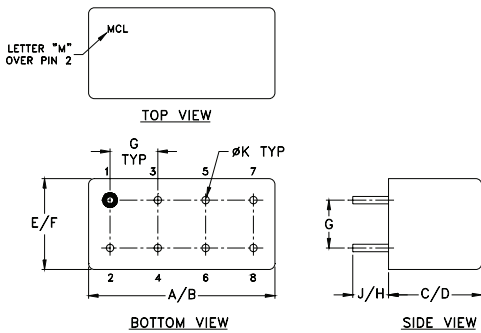


### Outline Dimensions (inch/mm)

A	B	C	D	E	F
.770	.800	.385	.400	.370	.400
19.56	20.32	9.78	10.16	9.40	10.16
G	H	J	K	wt	
.200	.20	.14	.031	grams	
5.08	5.08	3.56	0.79	5.2	

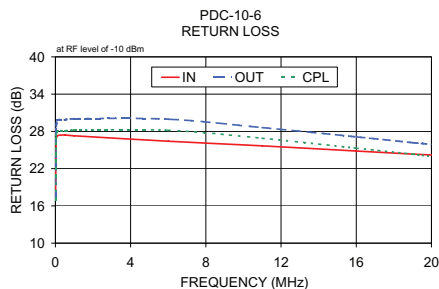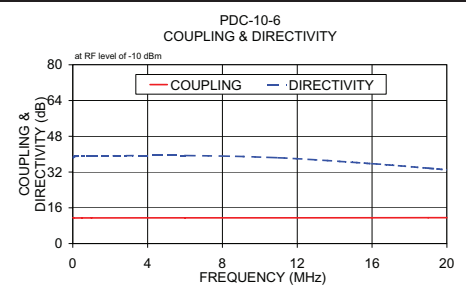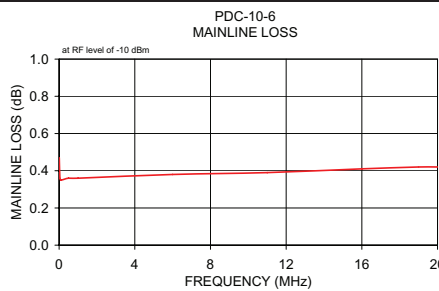

### Electrical Schematic

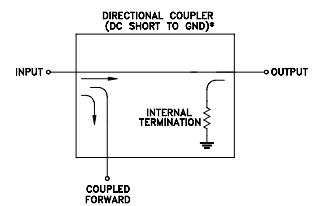

\* ELECTRICAL SCHEMATIC IS FOR DIRECTIONAL COUPLER WITH INTERNAL TRANSFORMER(S) THAT ROUTES DC FROM RF PORTS TO GROUND.

### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

