

Ceramic Bandpass Filter

BFCN-2850+

50Ω 2750 to 2950 MHz



CASE STYLE: FV1206
PRICE: \$3.95 ea. QTY (20)

Maximum Ratings


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power Input*	1.5W at 25°C

*Passband rating, derate linearly to 0.25W at 100°C ambient
Permanent damage may occur if any of these limits are exceeded.

Pin Connections

RF IN	1
RF OUT	3
GROUND	2,4


Outline Drawing

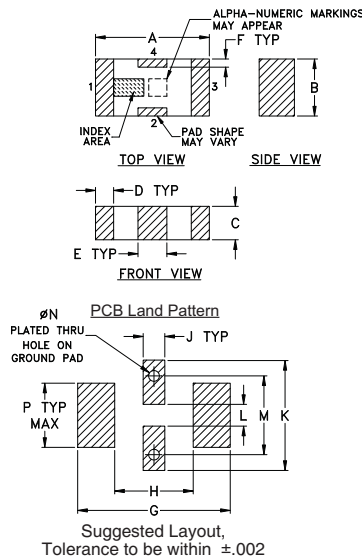

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	
.126	.063	.037	.020	.032	.009	.169	
3.20	1.60	0.94	0.51	0.81	0.23	4.29	
H	J	K	L	M	N	P	wt
.087	.024	.122	.024	.087	.012	.071	grams
2.21	0.61	3.10	0.61	2.21	0.30	1.80	.020

Demo Board MCL P/N: TB-270 Suggested PCB Layout (PL-137)

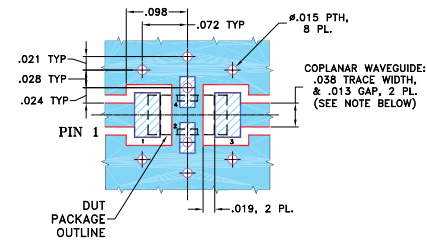

- COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS RO4350B WITH THICKNESS .020" ± .0015". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH & GAP MAY NEED TO BE MODIFIED.
- BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- Denotes PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- Denotes COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp

Features

- Good VSWR, 1.3:1 typ @ passband
- Small size
- Temperature stable
- LTCC construction

Applications


- Harmonic Rejection
- Transmitters / Receivers
- WiMAX

Electrical Specifications¹ at 25°C


Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit
Pass Band	Center Frequency	—	—	2850	—	MHz
	Insertion Loss	F1-F2	2750-2950	—	4	dB
	VSWR	F1-F2	2750-2950	—	1.3	:1
Stop Band, Lower	Insertion Loss	DC-F5	DC-1450	—	25	dB
		DC-F3	DC-1500	20	—	dB
	VSWR	DC-F3	DC-1500	—	20	:1
Stop Band, Upper	Insertion Loss	F4-F6	4300-4350	—	25	dB
		F6-F7	4350-5900	—	25	dB
	VSWR	F4-F7	4300-5900	—	20	:1

1. Measured on Mini-Circuits Characterization Test Board TB-270.

Typical Frequency Response

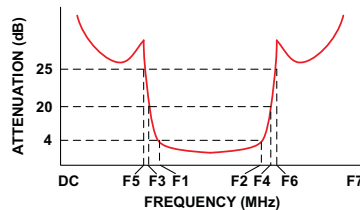

Functional Schematic

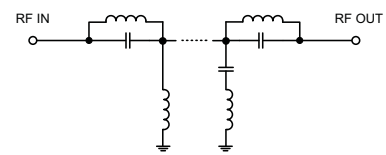

Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
50	81.00	217.15
500	44.96	82.73
1450	25.58	48.26
1500	24.93	45.72
2510	13.15	6.97
2580	6.47	3.61
2650	3.32	2.03
2750	2.02	1.46
2800	1.86	1.42
2850	1.81	1.43
2900	1.83	1.43
2950	1.90	1.41
3100	3.66	2.05
3150	6.24	3.38
3230	13.76	7.11
4300	31.72	27.16
4350	31.19	28.03
5900	20.36	30.49

