

LTCC Bandpass Filter

BFCN-3085A+

50Ω 2800 to 3400 MHz

The Big Deal

- Small size 3.2mm x 1.6mm
- Pass band (2800-3400 MHz)
- Low Insertion Loss (1.5 dB typical)
- Over 50 dB rejection up to 500 MHz



CASE STYLE: FV1206

Product Overview

The BFCN-3085A+ LTCC Band Pass Filter is constructed with multiple layers in order to achieve a miniature size and high repeatability of performance. Wrap-around terminations minimize variations in performance due to parasitics. Covering 600 MHz passband, these units offer low insertion loss and good rejection.

Key Features

Feature	Advantages
Small Size (3.20mm x1.6 mm)	Allows for high layout density of circuit boards, while minimizing affects of parasitics.
Wrap around termination	Provides excellent solderability and easy visual inspection capability.
LTCC construction	Provides a rugged package that is well suited for tough environments including high humidity and high temperature extremes.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Bandpass Filter

BFCN-3085A+

50Ω 2800 to 3400 MHz


Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power Input*	1.5W max. at 25°C
*Passband rating, derate linearly to 0.25W at 100°C ambient Permanent damage may occur if any of these limits are exceeded.	

Pad Connections

RF IN	1
RF OUT	3
GROUND	2,4

Outline Drawing

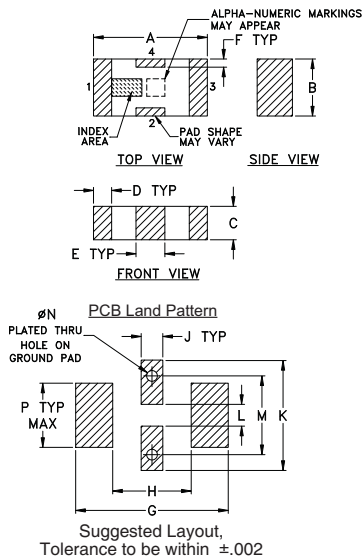


Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.126	.063	.037	.020	.032	.009	.169
3.20	1.60	0.94	0.51	0.81	0.23	4.29

H	J	K	L	M	N	P	wt
.087	.024	.122	.024	.087	.012	.071	grams
2.21	0.61	3.10	0.61	2.21	0.30	1.80	.020

Demo Board MCL P/N: TB-270 Suggested PCB Layout (PL-137)

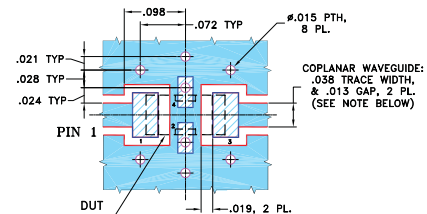

- NOTES: 1. COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS RO4350B WITH THICKNESS .020" ± .0015". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH & GAP MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp

Features

- Small size (0.126"x0.063"x0.037")
- Temperature stable
- Hermetically sealed
- LTCC construction

Applications

- Harmonic Rejection
- Transmitters / Receivers
- Military and Avionics



CASE STYLE: FV1206
PRICE: \$4.70 ea. QTY (10-49)

+RoHS Compliant


The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications¹ at 25°C


Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit
Pass Band	Center Frequency	—	—	3085	—	MHz
	Insertion Loss	F1-F2	—	1.5	2.5	dB
	VSWR	F1'-F2'	—	1.85	3.0	:1
Stop Band, Lower	Insertion Loss	DC-F5	50	68	—	dB
		DC-F7	20	49	—	
	VSWR	DC-F3	12	—	—	:1
Stop Band, Upper	Insertion Loss	F6-F8	20	34	—	dB
		F4-F8	12	—	—	
	VSWR	F6-F8	—	24	—	:1

1. Measured on Mini-Circuit's Characterization Test Board TB-270.

Typical Frequency Response

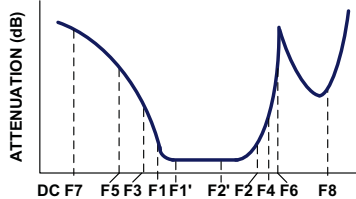

Functional Schematic

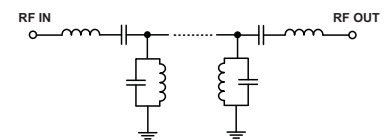

Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
10.00	60.29	347.44
100.00	74.29	434.30
500.00	59.20	579.06
1750.00	25.22	43.44
2000.00	18.63	35.46
2350.00	8.81	11.85
2550.00	3.46	3.73
2800.00	1.11	1.19
2900.00	1.31	1.65
3050.00	1.60	2.13
3085.00	1.63	2.15
3350.00	1.40	1.63
3400.00	1.35	1.44
3650.00	3.06	2.69
4000.00	17.57	17.93
4210.00	36.88	22.87
5300.00	56.71	30.49
7800.00	25.70	16.56

