

Surface Mount Bandpass Filter

SXBP-404+

50Ω 398 to 410 MHz

The Big Deal

- Flat group delay (3ns typical)
- Narrow band (<3% fractional Bandwidth)
- High rejection (50dB typical)
- Fast roll-off
- Miniature shielded package



CASE STYLE: HF1139

Product Overview

The SXBP-404+ is a narrow-band bandpass filter fabricated using SMT technology. Covering 404 MHz \pm 6 MHz, these units offer good matching within the passband and high rejection. This unit uses a miniature high Q capacitors and wire welded inductors for high reliability. It has repeatable performance across production lots and consistent performance across temperature.

Key Features

Feature	Advantages
Narrow bandwidth filter (fractional bandwidth of < 3%)	This enables the filter to reject adjacent channels with increased selectivity.
More than 40dB rejection up to 2400MHz	This enables the filter to attenuate spurious signals and reject harmonics for broad band of frequency.
Flat group delay (3 ns typical)	This model has flat group delay of 3nsec which helps in reducing the signal distortion.
Small size, 0.44" x 0.74" x 0.27"	The surface mount package enables the SXBP-404+ to be used in compact designs.

 **Mini-Circuits**[®]
ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine  Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

For detailed performance specs
& shopping online see web site

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

Surface Mount Bandpass Filter

SXBP-404+

50Ω 398 to 410 MHz



CASE STYLE: HF1139
PRICE: \$17.95 ea. QTY (1-9)

Features

- Flat group delay over passband
- High rejection, (50 dB typical)
- Shielded case
- Aqueous washable

Applications

- Test equipments
- Receivers / transmitters
- Harmonic rejection
- Military

Electrical Specifications at 25°C


Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit	
Pass Band	Center Frequency	—	—	404	—	MHz	
	Insertion Loss	F1-F2	398-410	—	4.1	5.5	dB
	VSWR	F1-F2	398-410	—	1.5	2.0	:1
Stop Band, Lower	Insertion Loss	DC-F3	DC-370	20	31	—	dB
	VSWR	DC-F3	DC-370	—	24	—	:1
Stop Band, Upper	Insertion Loss	F4-F5	445-4500	20	32	—	dB
	VSWR	F4-F5	445-4500	—	19	—	:1

Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	0.25W max.

Permanent damage may occur if any of these limits are exceeded.

Functional Schematic

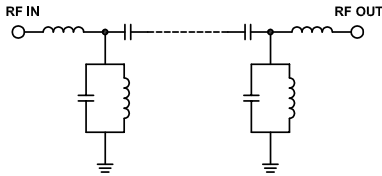

Typical Frequency Response







Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)	Frequency (MHz)	Group Delay (nsec)
1.0	83.12	133.63	398.00	28.98
326.0	67.26	108.58	399.00	28.55
350.0	50.91	66.82	400.00	28.22
370.0	32.52	25.94	401.00	27.95
379.0	20.75	10.25	402.00	27.73
386.0	9.82	2.50	402.50	27.64
393.0	4.96	1.58	403.00	27.56
398.0	4.12	1.50	403.50	27.48
404.0	3.69	1.16	404.00	27.42
410.0	3.84	1.09	404.50	27.36
420.0	6.24	2.26	405.00	27.31
426.0	12.13	5.66	405.50	27.29
445.0	32.95	25.94	406.00	27.27
500.0	62.04	78.97	406.50	27.26
700.0	85.57	124.09	407.00	27.27
1000.0	79.97	86.86	407.50	27.29
2000.0	64.54	59.91	408.00	27.33
3000.0	41.90	40.41	408.50	27.39
4000.0	44.13	26.74	409.00	27.46
4500.0	45.71	24.48	410.00	27.66

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

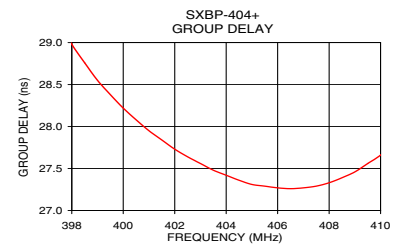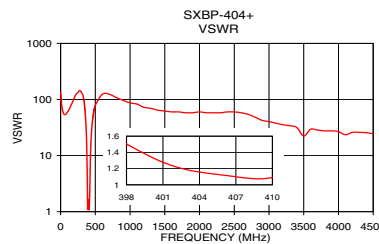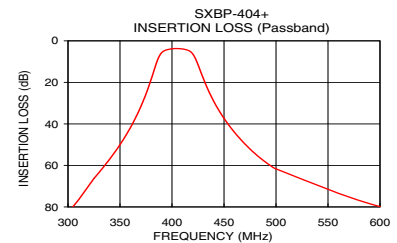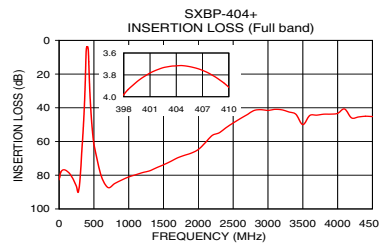

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED



The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

IFIRF MICROWAVE COMPONENTS


Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

For detailed performance specs & shipping online see web site

Pad Connections

INPUT	1
OUTPUT	8
GROUND	2,3,4,5,6,7

Demo Board MCL P/N: TB-368 Suggested PCB Layout (PL-230)

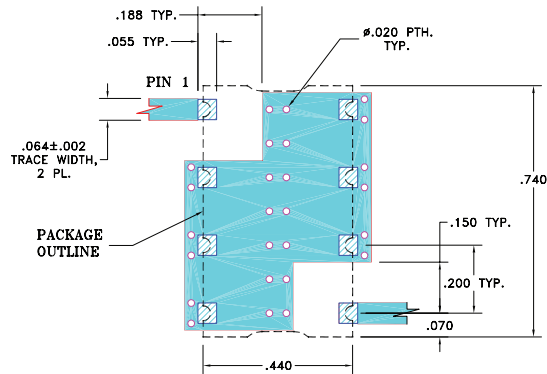


NOTE:


- TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS: .025"±.002". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
- BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Outline Drawing

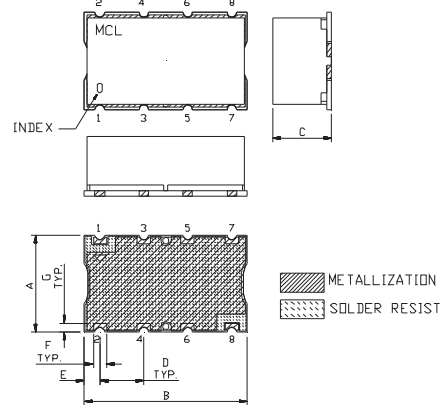

PCB Land Pattern



Outline Dimensions (inch / mm)

A	B	C	D	E	F	G
.44	.74	.27	.200	.07	.060	.040
11.18	18.80	6.86	5.08	1.78	1.52	1.02
H	J	K	L	M	wt	
.660	.200	.470	.055	.060	grams	
16.76	5.08	11.94	1.40	1.52	3.0	