

Bandpass Filter

50Ω 2500 to 2780 MHz

SYBP-2640+



CASE STYLE: TT1423

PRICE: \$9.95 ea. QTY (10)

Features

- High power handling
- Small size
- Temperature stable
- Excellent rejection

Applications

- Satellite
- Mobile
- Lab use

Electrical Specifications at 25°C

Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit
Pass Band	Center Frequency	—	—	2640	—	MHz
	Insertion Loss	F1-F2	—	2.3	2.9	dB
	VSWR	F1-F2	—	2.0	2.5	:1
Stop Band, Lower	Insertion Loss	DC-F3	20	23	—	dB
	VSWR	DC-F3	—	15	—	:1
Stop Band, Upper	Insertion Loss	F4-F5	20	30	—	dB
	VSWR	F4-F5	—	10	—	:1


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	7W* max. at 25°C


*Passband rating, derate linearly to 3W at 85°C ambient

Permanent damage may occur if any of these limits are exceeded.

Functional Schematic

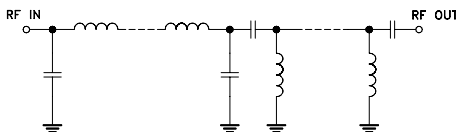

Typical Frequency Response






+ RoHS compliant in accordance
with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance.
See our web site for RoHS Compliance methodologies and qualifications.

Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
10.00	71.24	66.50
100.00	54.17	47.56
500.00	44.39	34.98
1000.00	58.56	34.73
1520.00	36.11	28.34
1600.00	33.17	26.66
1780.00	24.59	21.89
2000.00	12.23	11.50
2500.00	2.33	1.87
2780.00	2.29	1.80
3000.00	3.22	2.54
3720.00	26.76	8.04
4000.00	31.36	8.73
5000.00	27.09	11.73
6040.00	35.70	7.78

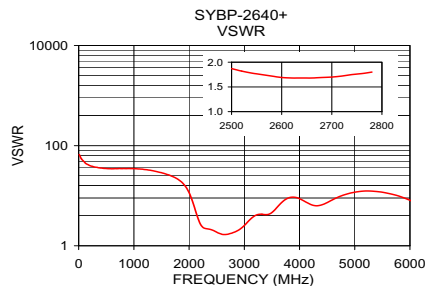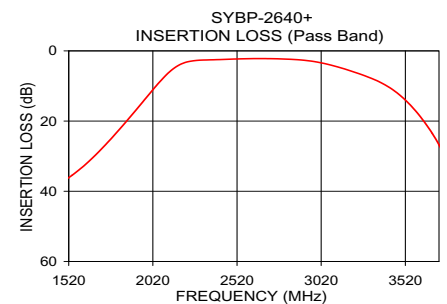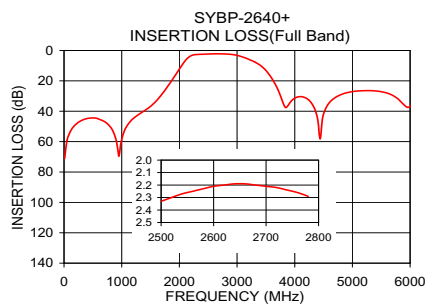

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine www.minicircuits.com Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.


For detailed performance specs
& shopping online see web site

REV. OR
M128407
ED-13680/18
SYBP-2640+
AD/CP/AM
110322
Page 2 of 3

Pin Connections

RF IN	4
RF OUT	6
GROUND	1,2,3,5

Demo Board MCL P/N: TB-517+
Suggested PCB Layout (PL-308)

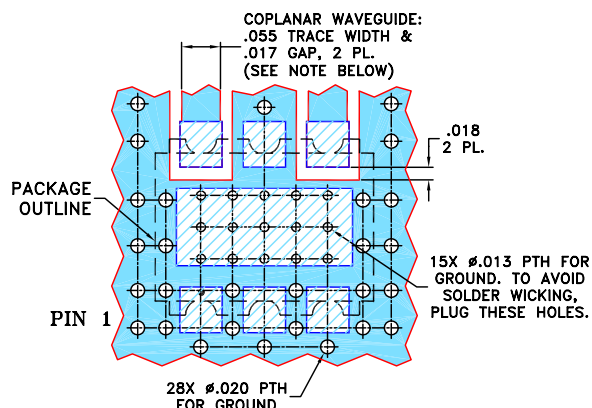


NOTES:


1. COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS RO4350B WITH THICKNESS .030" $\pm$.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Outline Drawing

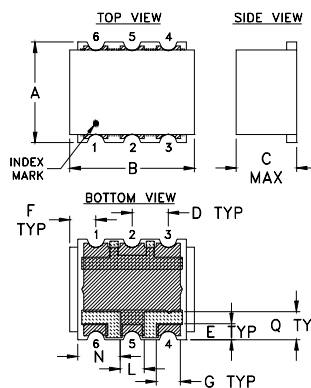

PCB Land Pattern



Suggested Layout,
Tolerance to be within $\pm .002$

- METALLIZATION
- SOLDER RESIST

Outline Dimensions (inch)

A	B	C	D	E	F	G	H
.25	.31	.15	.090	.040	.065	.060	.065
6.35	7.87	3.81	2.29	1.02	1.65	1.52	1.65
J	K	L	N	Q			wt.
.300	.060	.060	.105	.070			grams
7.62	1.52	1.52	2.67	1.78			0.50