


Ceramic

Low Pass Filter

50Ω

DC to 3300 MHz

LFTC-3300+




Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 125°C
Permanent damage may occur if any of these limits are exceeded.	


Pin Connections

RF IN	2
RF OUT	5
GROUND	1,3,4,6

Outline Drawing

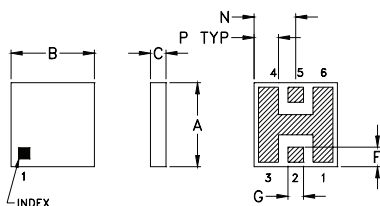

PCB Land Pattern




Suggested Layout,
Tolerance to be within ±0.002

Outline Dimensions (inch)

A	B	C	D	E	F	G	H
.150	.150	.034	--	--	.035	.028	--
3.81	3.81	0.86	--	--	0.89	0.71	--
J	K	L	M	N	P		wt
.060	.030	.184	.050	.075	.044		grams
1.52	0.76	4.67	1.27	1.91	1.12		0.15

Demo Board MCL P/N: TB-233 Suggested PCB Layout (PL-112)



NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.020" ± 0.0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.

2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

■ DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

■ DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- miniature size, 0.15"X0.15"X0.028"
- low profile, 0.028" height
- excellent power handling, 10W
- hermetically sealed

Applications

- harmonic rejection
- internal rejection
- receivers & transmitters

CASE STYLE: FR933

PRICE: \$3.75 ea. QTY. (20)

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications



Available Tape and Reel
at no extra cost

Reel Size	Devices/Reel
7"	20, 50, 100, 200, 500, 1000
13"	2000, 4000


Electrical Specifications¹ (T_{AMB}=25°C)

PASSBAND (MHz)	f _{co} , MHz Nom.	STOP BAND (MHz)	fr20 dB	VSWR (:1) Passband	POWER INPUT* (W)	MARKING	NO. OF SECTIONS
(loss < 1 dB)	(loss 3 dB)	(> 20 dB)	Typ.	Typ.			
DC-3300	4100	5600	10000	1.2	10	LF9	7

* Derate linearly to 4W at 100°C ambient.

1. Measured on Mini-Circuits Characterization Test Board TB-233.

typical frequency response





electrical schematic



Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
100.00	0.08	1.05
1000.00	0.29	1.24
1600.00	0.34	1.10
2000.00	0.44	1.15
2600.00	0.60	1.21
3200.00	0.76	1.15
3500.00	0.95	1.14
4100.00	2.83	3.16
4600.00	10.72	16.69
5000.00	16.54	44.51
5600.00	24.07	118.44
7000.00	36.57	38.64
8000.00	27.88	23.45
9000.00	22.32	22.03
10000.00	19.50	21.00

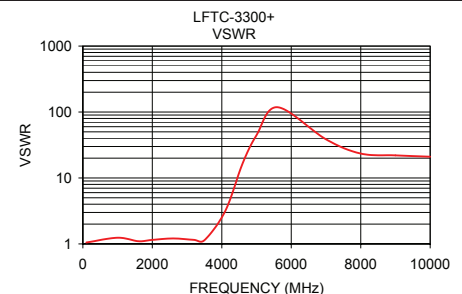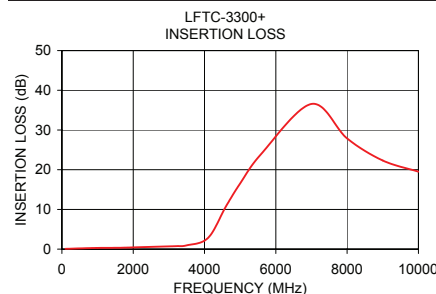

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.

C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 35166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. K
M121640
LFTC-3300+
EDB-020617
AD/YB/CP/AM
131111