

Surface Mount Low Pass Filter

50Ω DC to 8 MHz


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input	0.5W max.
Permanent damage may occur if any of these limits are exceeded.	


Pin Connections

INPUT	1
OUTPUT	8
GROUND	2,3,4,5,6,7

Outline Drawing

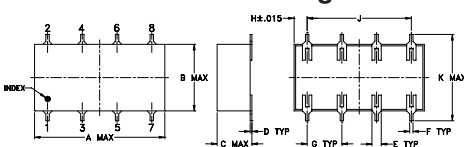


PCB Land Pattern






Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
0.75	0.38	0.28	0.01	0.05	0.02	0.2
19.05	9.65	7.11	0.25	1.27	0.51	5.08
H	J	K	M	N	P	wt
0.075	0.6	0.45	0.47	0.1	0.15	grams
1.91	15.24	11.43	11.94	2.54	3.81	1.60

Demo Board MCL P/N: TB-187+ Suggested PCB Layout (PL-049)

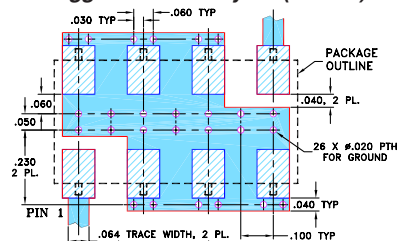

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
3. DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
4. DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

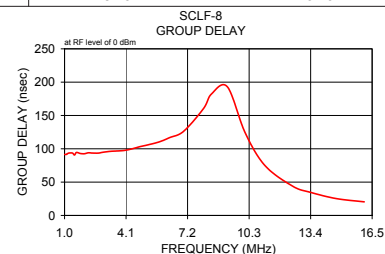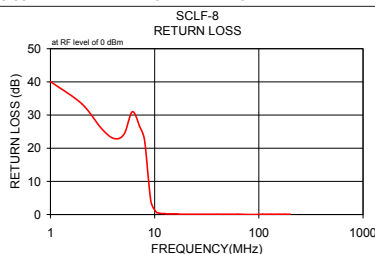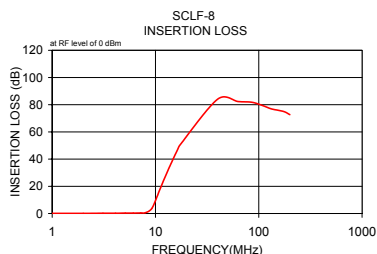

Features

- wide selection of cut-off frequencies
- excellent rejection
- custom models available


Applications

- defense communications
- receivers/transmitters
- harmonic rejection of VCOs


Electrical Specifications

Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit
Pass Band	Insertion Loss	DC-F1	—	—	1.0	dB
	Freq. Cut-Off	F2	—	3.0	—	dB
	VSWR	DC-F1	—	1.7	—	:1
Stop Band	Rejection Loss	F3-F4	20	—	—	dB
		F4-F5	40	—	—	dB
	VSWR	F3-F5	—	18	—	:1

Typical Frequency Response



Electrical Schematic



Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)	Frequency (MHz)	Group Delay (nsec)
1.00	0.10	40.10	1.00	91.50
2.00	0.10	33.40	1.10	91.70
3.10	0.20	25.90	1.20	93.50
4.10	0.20	22.90	1.40	93.60
5.10	0.30	24.30	1.50	90.70
6.10	0.30	31.00	1.60	94.50
7.20	0.40	26.50	1.80	92.90
8.00	0.60	22.40	2.00	92.60
9.20	3.60	4.00	2.20	94.00
10.40	12.70	0.70	2.40	93.60
10.80	15.90	0.50	2.70	93.50
11.20	18.90	0.40	2.90	94.60
11.70	22.40	0.30	3.30	96.10
12.10	25.00	0.30	3.60	96.70
12.50	27.50	0.30	4.00	97.50
12.90	29.90	0.20	4.40	99.90
13.60	33.90	0.20	4.80	103.20
14.30	37.50	0.20	5.20	105.90
15.10	41.40	0.20	5.80	110.60
15.80	44.50	0.20	6.30	116.80
16.50	47.50	0.20	7.00	126.30
17.20	50.20	0.10	8.00	160.20
40.10	84.10	0.10	8.40	182.20
62.90	82.30	0.10	9.20	193.10
85.80	81.80	0.00	10.10	124.10
108.60	79.40	0.10	11.10	74.80
131.50	77.00	0.10	12.50	43.80
154.30	75.90	0.10	13.40	34.60
177.20	74.80	0.10	14.70	25.30
200.00	72.70	0.10	16.10	20.40

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp.

REV. D
M111708
SCLF-8
100114