

Surface Mount High Pass Filter

SCHF-17+ SCHF-17

50Ω 18 to 200 MHz



CASE STYLE: YY161
PRICE: \$15.95 ea. QTY. (1-9)

+ RoHS compliant in accordance
with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site
for RoHS Compliance methodologies and qualifications.

Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C

Permanent damage may occur if any of these limits are exceeded.

Pin Connections

RF IN	1
OUTPUT	8
GROUND	2,3,4,5,6,7

Features

- low pass band insertion loss
- custom models available


Applications

- HF/VHF
- lab use
- transmitters/receivers


High Pass Filter Electrical Specifications

STOP BAND (MHz)	f _{co} , MHz Nom.	PASSBAND (MHz)	VSWR (:1)		POWER INPUT (W)
			Stopband Typ.	Passband Typ.	
(loss > 40 dB)	(loss > 20 dB)	(loss < 1 dB)	Typ.	Typ.	0.5
DC-9	9-13	16.5	18	1.25	0.5

Outline Drawing

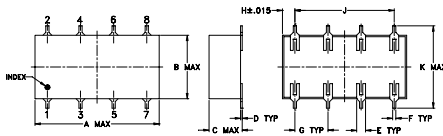

PCB Land Pattern




Suggested Layout,
Tolerance to be within ±.002

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
0.75	0.38	0.28	0.01	0.05	0.02	0.2
19.05	9.65	7.11	0.25	1.27	0.51	5.08

H	J	K	M	N	P	wt
0.075	0.6	0.45	0.47	0.1	0.15	grams
1.91	15.24	11.43	11.94	2.54	3.81	1.60


Demo Board MCL P/N: TB-187+ Suggested PCB Layout (PL-049)

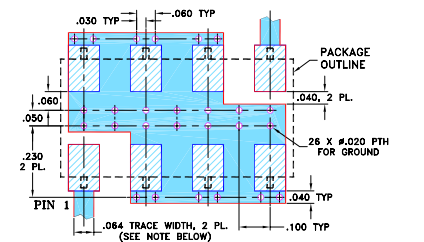


NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

typical frequency response





electrical schematic

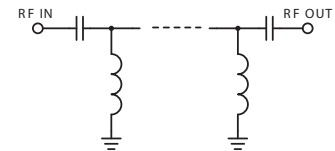

Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
0.99	85.38	1737.18
8.96	50.79	217.15
10.00	43.91	124.09
12.01	30.33	69.49
13.00	23.71	48.26
14.96	11.00	16.11
15.96	4.97	55.54
17.04	1.38	1.76
17.46	0.92	1.30
18.00	0.70	1.11
24.96	0.35	1.09
30.10	0.33	1.26
40.00	0.26	1.17
60.06	0.21	1.03
70.09	0.21	1.06
90.17	0.22	1.10
100.22	0.22	1.11
119.85	0.23	1.12
160.59	0.25	1.13
200.00	0.26	1.14

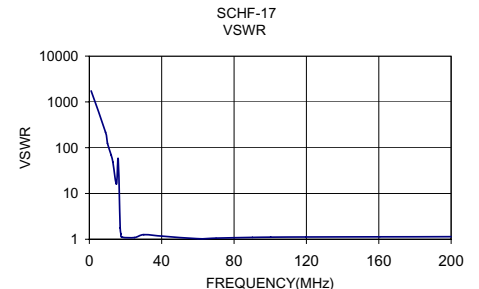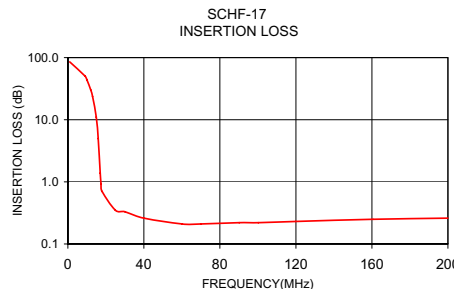

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED
The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com
IF/RF MICROWAVE COMPONENTS

For detailed performance specs
& shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. A
M122594
SCHF-17
RAV
100427