

Surface Mount

# Diplexer

## TDP-122-75+

75Ω DC to 1200 MHz  
(DC-120, 160-1200 MHz)



CASE STYLE: HR1176

### The Big Deal

- Low insertion loss
- High rejection
- 75Ω Impedance
- Miniature shielded package

### Product Overview

TDP-122-75+ is a low-pass + high-pass combination device. Low pass port is designed for DC to 120 MHz and high pass port is designed for 160 to 1200 MHz. This diplexer can be used in satellite systems, communication test sets and other multiband radio systems.

### Key Features

Feature	Advantages
Low passband insertion loss	Suitable for high performance application
Excellent stopband rejection	Spurious rejection and avoids using additional filters
Miniature shielded package	Reduced interference with the surrounding components.



ISO 9001 ISO 14001 AS 9100 CERTIFIED



Provides ACTUAL Data Instantly at [minicircuits.com](http://minicircuits.com)

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

IF/RF MICROWAVE COMPONENTS

For detailed performance specs & shopping online see web site

**Notes:** 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).

# Surface Mount Diplexer

## TDP-122-75+

75Ω DC to 1200 MHz (DC-120, 160-1200 MHz)



CASE STYLE: HR1176  
PRICE: \$14.95 ea. QTY (10)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

### Maximum Ratings


Operating Temperature	-40° to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	250mW at 25°C

Permanent damage may occur if any of these limits are exceeded. These ratings are not intended for continuous normal operation

### Pin Connections

HIGH PASS PORT	7
LOW PASS PORT	9
COMMON PORT	18
GROUND	1-6,8,10-17,19,20


### Outline Drawing

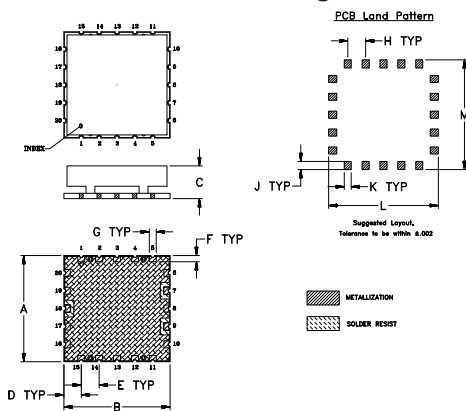

### Outline Dimensions (inch/mm)

A	B	C	D	E	F	
1.200 (30.48)	1.200 (30.48)	.370 (9.40)	.196 (4.98)	.202 (5.13)	.071 (1.80)	
G	H	J	K	L	M	wt
.079 (2.01)	.202 (5.13)	.091 (2.31)	.079 (2.01)	1.240 (31.50)	1.240 (31.50)	8.5 grams

### Demo Board MCL P/N: TB-563+ Suggested PCB Layout (PL-228)

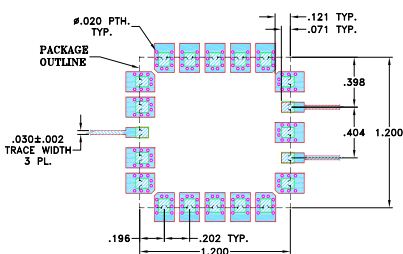

### Features

- Low insertion loss
- 75Ω Impedance
- Combination of Low pass and High pass filters
- Miniature shielded package
- Aqueous washable

### Applications

- Satellite systems
- Multiband radio systems


### Electrical Specifications at 25°C

Parameter	Port	Frequency (MHz)	Min.	Typ.	Max.	Unit	
Pass Band	Insertion Loss	Low Pass	DC-120	-	0.9	2.0	dB
	High Pass	160-1200	-	0.9	2.0		
	Return Loss	Low Pass	DC-120	14	19	-	dB
High Pass	160-1200	10	12	-			
Common	DC-120	14	18	-			
Stop Band Isolation	Low Pass	160-1200	20	48	-	dB	
	High Pass	DC-120	25	50	-		

### Typical Performance Data at 25°C

FREQUENCY (MHz)	INSERTION LOSS (dB)			RETURN LOSS (dB)	
	Low Pass Port	High Pass Port	Common Port	Low Pass Port	High Pass Port
1	0.04	76.15	34.98	41.72	0.05
15	0.08	54.17	36.84	38.58	0.00
40	0.16	50.24	32.35	42.91	0.02
80	0.33	55.01	22.76	22.61	0.20
120	0.87	58.72	32.30	25.89	0.64
126	1.15	39.79	20.87	21.66	0.76
134	2.44	24.93	13.76	10.62	1.06
136	3.44	19.61	12.83	7.83	1.27
138	5.60	13.24	10.51	4.96	1.77
140	9.59	8.33	8.11	2.81	2.75
142	15.45	5.41	7.15	1.70	4.16
144	22.19	3.79	7.50	1.24	5.75
148	32.08	2.16	10.10	0.88	9.28
150	34.91	1.73	11.94	0.78	11.22
154	40.95	1.23	16.38	0.63	15.36
160	51.57	0.89	25.19	0.49	21.71
225	56.18	0.40	22.09	0.25	23.19
300	59.91	0.31	31.58	0.29	33.03
500	54.25	0.47	14.18	0.32	14.27
700	55.47	0.71	12.18	0.14	12.26
1000	55.65	0.43	19.14	0.03	20.36
1200	61.82	0.51	25.29	0.16	23.23

### Functional Schematic

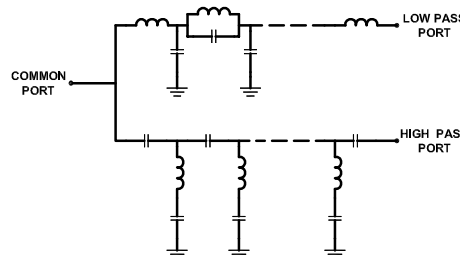

**Mini-Circuits®**  
ISO 9001 ISO 14001 AS 9100 CERTIFIED

For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at [minicircuits.com](http://minicircuits.com)

IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).

REV.0R  
M134453  
EDU1439  
TDP-122-75+  
URJ  
111230  
Page 2 of 3

