

Coaxial Bandpass Filter

ZX75-12+


50Ω 9 to 15 MHz

Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	0.25 W at 25°C

Permanent damage may occur if any of these limits are exceeded.

Outline Drawing (HY1239)

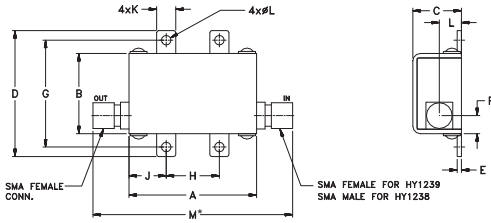

Outline Dimensions (inch/mm)

A	B	C	D	E	F	
1.20	.75	.46	1.18	.04	.17	
30.48	19.05	11.68	29.97	1.02	4.32	
G	H	J	K	L	M	wt.
1.00	.50	.35	.18	.106	1.88	grams
25.40	12.70	8.89	4.57	2.69	47.75	35.0

Note:
* M dimension is 2.05 inch (52.07 mm) for HY1238 Case Style.

Features

- High Rejection
- Sharp Insertion Loss roll off
- Shielded case

Applications

- High rejection applications
- Image rejection
- IF signal processing
- Receivers / Transmitters
- Test Lab



MALE FEMALE SMA shown

SMA Connectors	Model	Price	Qty.	Case
INPUT FEMALE	OUTPUT FEMALE	ZX75-12-S+	\$45.95	(1-9) HY1239
MALE	FEMALE	ZX75-12M-S+	\$45.95	(1-9) HY1238


+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


Bandpass Filter Electrical Specifications (T_{AMB} = 25°C)

CENTER FREQ. (MHz)	PASSBAND (MHz) (Loss < 3.5dB)	STOPBANDS (MHz)				VSWR (:1)		
		Loss > 20dB		Loss > 40dB		Passband		Stopband
Fc	F1 - F2	F3	F4	F5	F6	Typ.	Max.	Typ.
12	9 - 15	7.5	18	7	20 - 3000	1.5	2.2	30

Typical Frequency Response




Functional Schematic

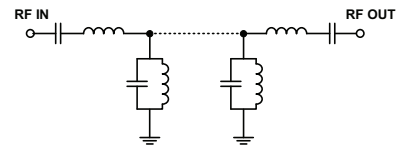

Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
0.3	100.39	1737.18
7.0	53.30	62.05
7.5	36.73	35.46
8.0	14.55	9.74
8.2	5.51	2.37
8.5	3.45	2.36
9.0	1.85	1.22
11.0	1.31	1.40
12.0	1.26	1.37
13.0	1.59	1.77
15.0	2.09	1.75
15.7	4.10	2.81
16.0	6.58	4.66
16.6	15.51	11.77
18.0	37.07	30.49
20.0	60.12	59.91
100.0	94.22	248.17
1000.0	67.12	23.49
3000.0	59.03	6.19

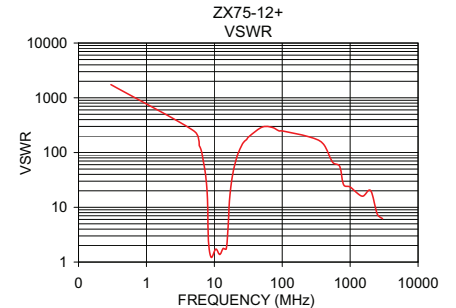

Mini-Circuits
ISO 9001 ISO 14001 AS 9100 CERTIFIED
The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com
I/F/R/ MICROWAVE COMPONENTS

For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuits' applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. OR
M119635
EDR-8735AUF1
ZX75-12+
URJ/RAV
121017
Page 1 of 1