

Coaxial Low Pass Filter

50Ω DC to 700 MHz

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power Input	0.5W max.

Permanent damage may occur if any of these limits are exceeded.

Features

- good attenuation rate, 1.35 typ. 20dB/ 3dB BW ratio
- rugged shielded case
- other SLP models available with wide selection of cut-off frequencies

Applications

- lab use
- test equipment
- video equipment

SLP-750+
SLP-750



CASE STYLE: FF99

Connectors	Model	Price	Qty.
SMA	SLP-750(+)	\$34.95 ea.	(1-9)


+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Low Pass Filter Electrical Specifications

PASSBAND (MHz)	fco (MHz) Nom.	STOPBAND (MHz)	VSWR (:1)
(loss < 1 dB)	(loss 3 dB)	(loss > 20 dB) (loss > 40 dB)	Passband Typ. Stopband Typ.
DC-700	770	1000-1300 1300-2000	1.7 18


Outline Drawing

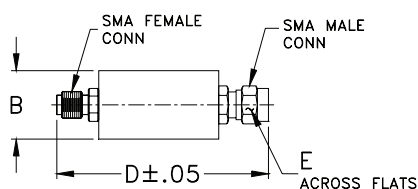


Outline Dimensions (inch/mm)

B	D	E	wt
.67	1.98	.312	grams
17.02	50.29	7.92	42.0

typical frequency response





electrical schematic



Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)	Frequency (MHz)	Group Delay (nsec)
$\bar{x}$	σ			
10.00	0.02	0.00	10.00	1.29
131.00	0.15	0.01	131.00	1.27
213.00	0.20	0.01	213.00	1.28
294.00	0.21	0.01	294.00	1.33
375.00	0.23	0.01	375.00	1.40
456.00	0.28	0.01	456.00	1.49
537.00	0.35	0.01	537.00	1.62
619.00	0.43	0.01	619.00	1.84
700.00	0.64	0.04	700.00	2.34
732.00	0.99	0.17	732.00	2.68
741.00	1.18	0.24	741.00	2.79
746.00	1.31	0.28	746.00	2.83
781.00	2.95	0.71	781.00	2.97
799.00	4.36	0.93	799.00	2.82
862.00	11.17	1.19	862.00	1.86
903.00	15.89	1.11	903.00	1.41
944.00	20.34	1.01	944.00	1.12
959.00	21.89	0.97	959.00	1.05
1020.00	27.86	0.85	1020.00	0.85
1100.00	34.87	0.76	1100.00	0.67
1220.00	44.18	0.74	1220.00	0.53
1300.00	49.74	0.87	1300.00	0.48
1470.00	60.03	1.66	1470.00	0.54
1550.00	64.14	2.28	1550.00	0.27
1630.00	67.42	2.85	1630.00	0.35
1710.00	70.05	3.30	1710.00	0.17
1750.00	71.00	3.31	1750.00	0.49
1830.00	72.16	3.29	1830.00	0.79
1950.00	72.55	2.75	1950.00	1.22
2000.00	72.63	2.29	2000.00	0.33

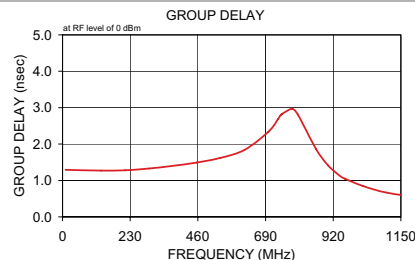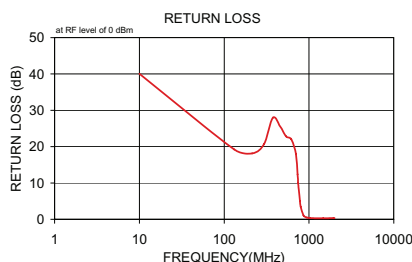

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

For detailed performance specs & shipping online see web site

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MC/Store/terms.jsp.

REV. A
M98898
SLP-750
090821