

Ultra-Reliable Low Pass Filter

50Ω DC to 4000 MHz

VLP-54

Maximum Ratings

Operating Temperature -55°C to 100°C

Storage Temperature -55°C to 100°C

RF Power Input* 10W max. at 25°C

* Passband rating, derate linearly to 0.4xPmax at 100°C ambient. Permanent damage may occur if any of these limits are exceeded.

Features

- rugged unibody construction
- low insertion loss passband, less than 1 dB typ.
- excellent power handling, 10W
- low cost

Applications


- harmonic rejection
- transmitters/receivers
- lab use



CASE STYLE: FF704

Connectors	Model	Price	Qty.
SMA	VLP-54	\$24.95 ea.	(1-9)

Outline Drawing

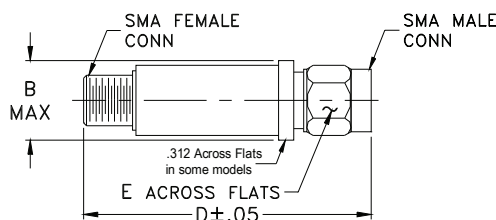


Outline Dimensions (inch/mm)

B	D	E	wt
.410	1.43	.312	grams
10.41	36.32	7.92	10.0

Electrical Specifications (T_{AMB}=25°C)

PASSBAND (MHz) (loss < 1 dB)	f _{co} , MHz Nom. (loss 3 dB)	STOP BAND (MHz) (loss > 20 dB)	VSWR (:1) Passband
Typ.	Typ.	f _{r20} dB Typ.	Typ.
DC-4000	5400	7100	9500
			1.2

typical frequency response





electrical schematic



Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
100.00	0.06	1.04
1000.00	0.27	1.19
2000.00	0.39	1.15
2600.00	0.49	1.16
3000.00	0.56	1.18
3400.00	0.59	1.15
4000.00	0.69	1.05
5400.00	3.23	3.69
7100.00	22.84	48.68
8000.00	41.39	35.82
9500.00	27.16	32.31

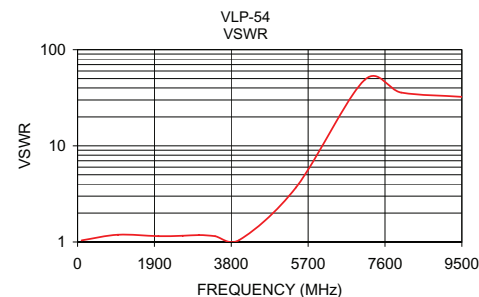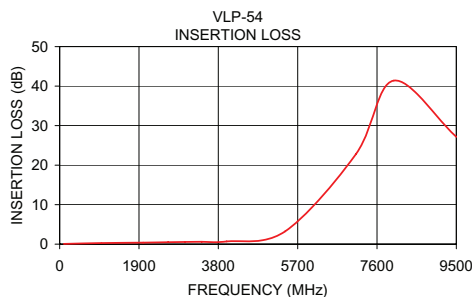

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine [minicircuits.com](http://www.minicircuits.com) Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

For detailed performance specs
& shopping online see web site

REV. B
M129173
VLP-54
ED-10545B/10
WZ/AD/CP/AM
101102