

Coaxial High Pass Filter

50Ω

2000 to 5200 MHz

VHF-1910+
VHF-1910

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power Input*	7W max. at 25°C

* Passband rating, derate linearly to 3W at 100°C ambient.
Permanent damage may occur if any of these limits are exceeded.

Features

- rugged unibody construction, small size
- 7 sections
- temperature stable
- excellent power handling, 7W
- low cost

Applications

- sub-harmonic rejection and dc blocking
- transmitters/receivers
- lab use




CASE STYLE: FF704

Connectors	Model	Price	Qty.
SMA	VHF-1910(+)	\$24.95 ea.	(1-9)

+ RoHS compliant in accordance
with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site
for RoHS Compliance methodologies and qualifications.

Outline Drawing

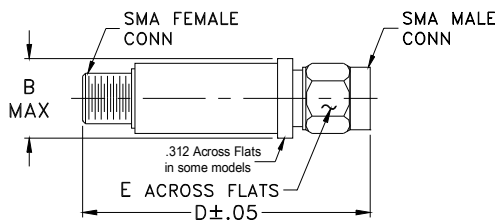


Outline Dimensions (inch/mm)

B	D	E	wt
.410	1.43	.312	grams
10.41	36.32	7.92	10.0


Electrical Specifications (T_{AMB}=25°C)

STOP BAND (MHz)	f _{co} , MHz	PASSBAND (MHz)	VSWR (:1)	NO. OF SECTIONS
Min.	Nom.	Typ.	Typ.	
(loss > 40 dB)	(loss 3 dB)	(loss < 1.3 dB)	Frequency (MHz)	
(loss > 20 dB)	Typ.	(loss < 2 dB)	Stopband	
1075	1910	2200-4400	20:1	7
1400		2000-5200	2100-4500	

typical frequency response


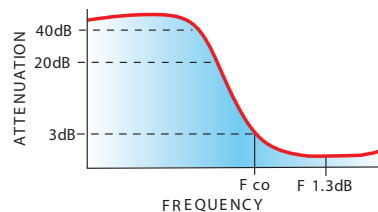


electrical schematic



Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
1	90.73	1737.18
100	76.02	1737.18
1075	42.24	64.35
1400	25.59	37.77
1630	13.07	17.75
1750	6.95	7.66
1850	3.37	3.43
1910	2.20	2.35
2000	1.44	1.71
2100	1.12	1.49
2200	0.95	1.38
4400	0.84	1.81
4500	0.96	1.93
5200	1.89	3.07
7000	4.33	6.58

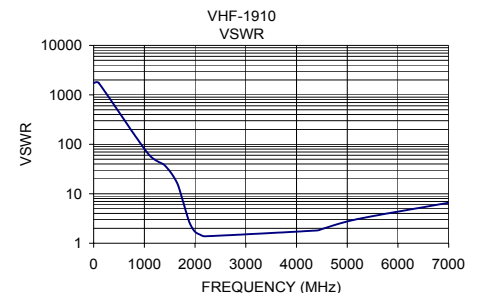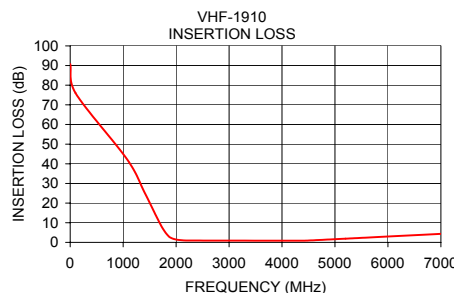

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. F
M129173
VHF-1910
EDR-6437/4
RVN/AD/AM
101029