

Ceramic Active Mixer

Level 0 (LO Power 0 dBm) 2000 to 6000 MHz


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	100mW
IF Current	40mA
LO Power	10mW
Permanent damage may occur if any of these limits are exceeded.	


Pin Connections

LO	10
RF	5
IF	3
DC	7
GROUND	1,2,4,6,8,9

Outline Drawing

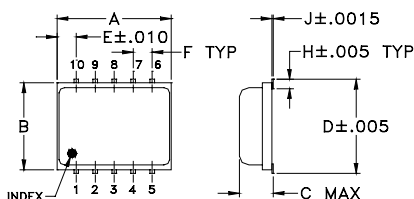


PCB Land Pattern



Outline Dimensions (inch mm)

A	B	C	D	E	F	G
.30	.250	.105	.266	.050	.050	.012
7.62	6.35	2.67	6.76	1.27	1.27	0.30
H	J	K	L	M	wt	
.029	.004	.085	.296	.030	grams	
0.74	0.10	2.16	7.52	0.76	0.3	

Demo Board MCL P/N: TB-404 Suggested PCB Layout (PL-283)

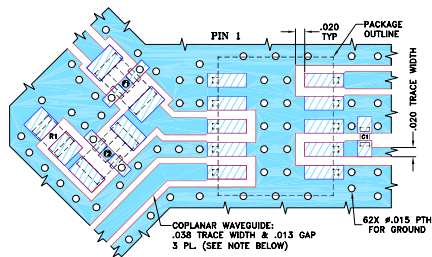

CAPACITOR C1: 1000 pF, 0402 SIZE
RESISTOR R1: 49.9 Ohm, 0805 SIZE
FILTER F1: LFCN-1400+, FY1206 CASE STYLE
FILTER F2: HFCN-1810+, FY1206 CASE STYLE
NOTE: 1. COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.020" ± 0.0015". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- low conversion loss, 6.9 dB typ.
- wide bandwidth, 2000 to 6000 MHz
- LTCC double balanced mixer with LO amplifier
- aqueous washable
- low profile
- low cost
- protected by US patent 7,027,795

Applications

- PCN
- defense & weather radar
- WCDMA
- defense communications

Electrical Specifications

FREQUENCY (MHz)		CONVERSION LOSS* (dB)			LO-RF ISOLATION (dB)		LO-IF ISOLATION (dB)		DC POWER		IP3 at center band (dBm)
		$\bar{X}$	σ	Max.	Typ.	Min.	Typ.	Min.	Volt	Current (mA) Max.	
2000-3500	DC-1000	6.9	0.1	8.9	16	10	35	23	5	110	20
	DC-1000	6.9	0.1	8.9	8	3	35	27	5	110	19


1 dB Compr. +10 dBm typ.

* Conversion loss at 30 MHz IF.

Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO 0dBm	LO 0dBm	LO 0dBm	LO 0dBm	LO 0dBm
2005.10	1975.10	6.41	22.93	35.96	2.40	5.17
2205.10	2175.10	6.50	20.61	45.55	2.42	5.83
2405.10	2375.10	5.80	21.34	33.28	2.11	3.80
2605.10	2575.10	5.89	18.60	33.35	1.87	3.21
2805.10	2775.10	6.96	17.66	35.62	3.43	3.09
3005.10	2975.10	6.65	14.13	36.97	2.95	3.10
3205.10	3175.10	7.25	12.80	36.60	3.12	3.17
3405.10	3375.10	7.25	15.03	34.47	3.15	2.97
3605.10	3575.10	7.95	14.75	33.49	3.73	2.39
3805.10	3775.10	7.78	18.55	31.52	3.26	1.82
4005.10	3975.10	7.16	18.19	32.59	2.66	1.44
4405.10	4375.10	6.15	8.68	37.37	1.40	1.48
4605.10	4575.10	6.67	8.24	37.63	1.63	1.56
4805.10	4775.10	7.06	8.76	37.81	1.58	1.62
5005.10	4975.10	6.81	6.77	36.56	1.17	1.67
5205.10	5175.10	6.40	6.01	35.48	1.61	1.60
5405.10	5375.10	6.46	6.05	34.71	1.65	1.47
5605.10	5575.10	6.95	7.12	33.12	2.21	1.36
5805.10	5775.10	7.27	7.91	33.45	2.57	1.35
6005.10	5975.10	7.48	8.62	33.08	2.82	1.43

Electrical Schematic

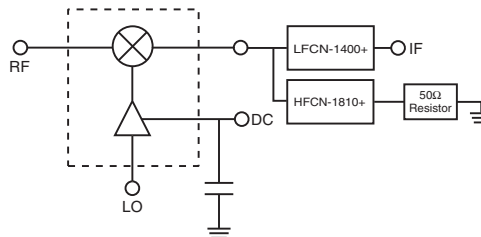

LFCN-1400+ & HFCN-1810+ are added to improve isolations.

MACA-63H+



CASE STYLE: DZ1034
PRICE: \$12.95 ea. QTY (10)

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications



Available Tape and Reel
at no extra cost

Reel Size	Devices/Reel
7"	10, 20, 50, 100, 200, 500
13"	1000

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED
The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com
IF/RF MICROWAVE COMPONENTS

For detailed performance specs
& shopping online see web site

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. A
M115874
ED-10457/10
MACA-63H+
DJ/CP/AM/QL
120725
Page 1 of 2

