

High IP3

Frequency Mixer

Level13 (LO Power +13dBm) 100 to 150 MHz

HJK-151MH+



CASE STYLE: TTT881

PRICE: \$8.95 ea. QTY (10)


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
LO Power	+19 dBm
RF Power	+20 dBm
Permanent damage may occur if any of these limits are exceeded.	

Pin Connections

LO	2
RF	1
IF	3
GROUND	4,5,6


Outline Drawing

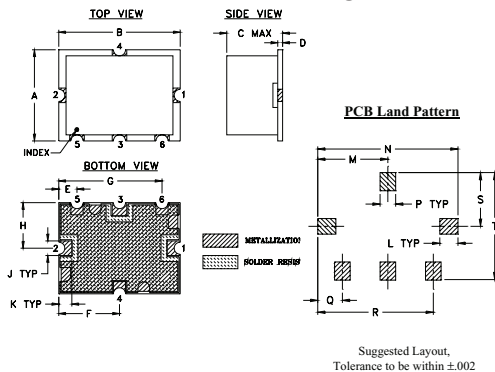

Outline Dimensions (inch)

A	B	C	D	E	F	G	H	J	K
.38	.50	.23	.020	.075	.250	.425	.187	.050	.050
9.65	12.70	5.84	0.51	1.91	6.35	10.80	4.75	1.27	1.27
L	M	N	P	Q	R	S	T	wt.	
.070	.270	.540	.060	.095	.445	.208	.415	grams	
1.78	6.86	13.72	1.52	2.41	11.30	5.28	10.54	0.8	

Demo Board MCL P/N: TB-12 Suggested PCB Layout (PL-079)

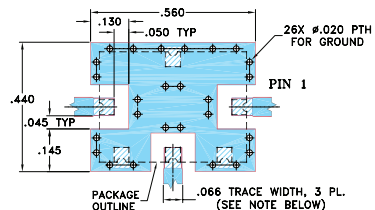

- TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
- THE USE OF SOLDER MASK OVER THE GROUND AREA UNDER THE UNIT AS SHOWN IS RECOMMENDED TO PREVENT POTENTIAL SHORTING. IF USER CHOOSES TO EXPOSE METAL UNDER THE ENTIRE UNIT GROUND PAD FOR IMPROVED GROUNDING, IT IS RECOMMENDED A SOLDER MASK DAM BE APPLIED AROUND EACH GROUND PAD TO ENSURE FILLET AND CONNECTION AT GROUND PADS.
- BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

■ DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER), SEE NOTE 2.

Features

- high IP2, 60 dBm typ.
- high IP3, 30 dBm typ.
- excellent L-R isolation, 55 dB typ.; L-I isolation, 50 dB typ.
- compression, 3 dB higher than LO power
- protected by US Patent 6,807,407

Applications

- amateur radio
- mobile radio
- paging
- non-geostationary mobile


Electrical Specifications at 25°C

Parameter	Min.	Typ.	Max.	Unit
Frequency Range, RF	100		150	MHz
Frequency Range, LO	130	—	180	MHz
Frequency Range, IF	10	—	100	MHz
Conversion Loss	—	6.8	8.2	dB
LO to RF Isolation	40	55	—	dB
LO to IF Isolation	38	50	—	dB
IP2	—	60	—	dBm
IP3	—	30	—	dBm
RF Input at 1 dB Compression	—	+16	—	dBm

Typical Performance Data

Frequency		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)	IP3 (dBm)	IP2 (dBm)
RF MHz	LO MHz	LO +13dBm	LO +13dBm	LO +13dBm	LO +13dBm	LO +13dBm	LO +13dBm	LO +13dBm
100.1	130.10	6.60	57.67	52.33	2.21	4.01	27.33	59.95
102.1	132.10	6.62	58.25	51.94	2.23	4.02	27.87	64.91
104.1	134.10	6.65	58.68	51.53	2.25	4.03	28.85	69.94
106.1	136.10	6.67	58.85	51.19	2.27	4.04	30.40	77.94
108.1	138.10	6.68	58.74	50.92	2.29	4.05	31.56	69.41
110.1	140.10	6.68	58.53	50.67	2.32	4.07	31.78	65.32
112.1	142.10	6.68	58.27	50.44	2.33	4.08	31.29	64.56
114.1	144.10	6.68	57.93	50.25	2.34	4.09	30.75	62.36
116.1	146.10	6.67	57.61	50.14	2.35	4.10	31.49	61.91
118.1	148.10	6.66	57.21	50.06	2.36	4.11	31.50	61.34
120.1	150.10	6.65	56.81	50.03	2.38	4.13	32.71	60.17
122.1	152.10	6.65	56.37	50.02	2.39	4.14	32.78	58.77
124.1	154.10	6.64	55.90	50.02	2.40	4.16	33.52	58.73
126.1	156.10	6.66	55.45	49.99	2.42	4.17	32.93	58.21
128.1	158.10	6.67	55.05	49.96	2.43	4.18	32.57	57.27
130.1	160.10	6.68	54.66	49.90	2.44	4.20	32.42	56.94
132.1	162.10	6.68	54.28	49.82	2.46	4.23	31.57	56.93
134.1	164.10	6.68	53.93	49.75	2.49	4.23	31.71	56.29
146.1	176.10	6.78	51.22	49.35	2.70	4.32	30.33	55.60
150.1	180.10	6.87	50.19	49.43	2.79	4.34	30.82	54.33

Electrical Schematic

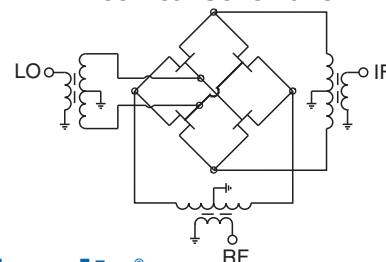

For detailed performance specs & shopping online see web site

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine www.minicircuits.com Provides ACTUAL Data Instantly at [minicircuits.com](http://www.minicircuits.com)

IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. OR
M135819
HJK-151MH+
ED-14378/1
WL/CP/AM
130327
Page 2 of 3

