

High IP3

Frequency Mixer

Level 13 LO Power+13 dBm 2960 to 3060 MHz

MCA-30FMH+



CASE STYLE: DZ883

PRICE: \$10.95 ea. QTY.(1-9)

Maximum Ratings

Operating Temperature -55°C to 100°C

Storage Temperature -55°C to 100°C

LO & RF Power 16 dBm

Permanent damage may occur if any of these limits are exceeded.

Pin Connections

LO	10
RF	5
IF	3
GROUND	1,2,4,6,7,8,9

Features

- excellent IP3, 30 dBm typ.
- good L-R isolation, 35 dB typ.
- excellent 1dB compression, RF>LO power
- industry standard foot print
- LTCC design for excellent temperature stability performance repeatability and small size
- low price
- protected by US Patent 6,959,180



Applications

- line of sight links
- satellite communications

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Outline Drawing

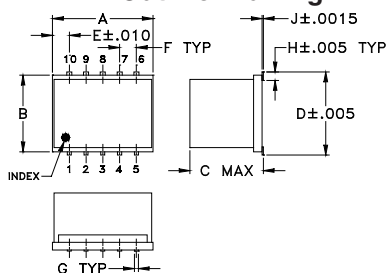

Suggested Layout, Tolerance to be within ±.002

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.30	.250	.190	.266	.050	.050	.012
7.62	6.35	4.83	6.76	1.27	1.27	0.30
H	J	K	L	M	N	O
.029	.004	.085	.296	.030		
0.74	0.10	2.16	7.52	0.76		
					wt	grams
						0.5


Electrical Specifications (T_{AMB}=-55°C to 100°C)

FREQUENCY (MHz)			IP3 (dBm)	RF in at 1 dB compr. (dBm)	CONVERSION LOSS (dB)		LO-RF ISOLATION (dB)		LO-IF ISOLATION (dB)	
RF	LO	IF	Typ.	Min.	Typ.	Max.	Typ.	Min.	Typ.	Min.
2960-3060	2780-2880	130-230	30	13	7.4	8.9	35	20	27	15


Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)	IP3 (dBm)
RF	LO	LO +13dBm	LO +13dBm	LO +13dBm	LO +13dBm	LO +13dBm	LO +13dBm
2960.00	2780.00	7.47	36.27	30.78	1.73	2.80	31.48
2970.00	2790.00	7.44	36.32	30.86	1.75	2.64	31.59
2980.00	2800.00	7.38	36.41	30.91	1.77	2.66	31.76
2990.00	2810.00	7.36	36.32	30.97	1.82	2.75	31.82
3000.00	2820.00	7.37	36.23	31.00	1.88	2.80	31.72
3010.00	2830.00	7.39	36.23	31.16	1.94	2.73	31.76
3020.00	2840.00	7.42	36.35	31.34	1.97	2.57	31.94
3030.00	2850.00	7.46	36.54	31.54	2.00	2.40	32.25
3040.00	2860.00	7.47	36.62	31.69	2.02	2.29	32.56
3050.00	2870.00	7.47	36.76	31.83	2.03	2.32	32.86
3060.00	2880.00	7.47	37.07	31.90	2.05	2.48	33.20

Demo Board MCL P/N: TB-144 Suggested PCB Layout (PL-045)

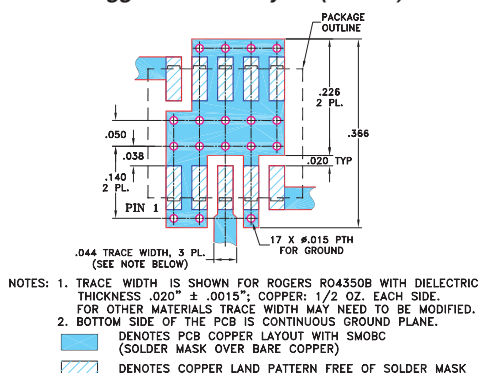

Electrical Schematic

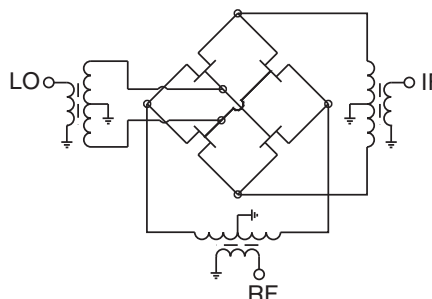

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp.

REV. E
M121747
MCA-30FMH+
DJ/TD/CP/AM
090610
Page 1 of 2

