

High IP3

Frequency Mixer WIDE BAND

MCA-35H+

Level 17 (LO Power+17 dBm) 500 to 3500 MHz



CASE STYLE: DZ883

PRICE: \$8.95 ea. QTY.(10-49)

Maximum Ratings

Operating Temperature -55°C to 100°C

Storage Temperature -55°C to 100°C

RF Power 200 mW


IF Current 40 mA

Permanent damage may occur if any of these limits are exceeded.


Pin Connections

LO	10
RF	5
IF	3
GROUND	1,2,4,6,7,8,9

Outline Drawing

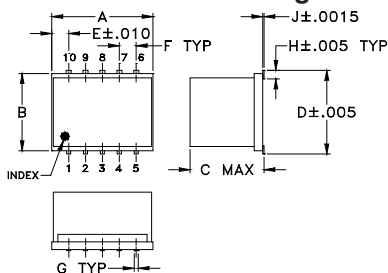

PCB Land Pattern


Suggested Layout,
Tolerance to be within ±.002

Outline Dimensions (inch mm)

A	B	C	D	E	F	G
.30	.250	.190	.266	.050	.050	.012
7.62	6.35	4.83	6.76	1.27	1.27	0.30
H	J	K	L	M	wt	
.029	.004	.085	.296	.030	grams	
0.74	0.10	2.16	7.52	0.76	0.5	

Demo Board MCL P/N: TB-144

Suggested PCB Layout (PL-045)



NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .020" ± .0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

■ DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
■ DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- wide bandwidth, 500 to 3500 MHz
- excellent isolation, 30 dB typ. (1800-2500 MHz)
- good matching 2:1 VSWR typ. (over 1800-2800 MHz)
- small size 0.25"x0.3"x0.2"
- aqueous washable
- triple balanced mixer
- protected by US Patent 6,917,796

Applications

- cellular
- PHS
- PCN
- WiMAX
- PDC
- DECT

Electrical Specifications (T_{AMB}= -55°C to 100°C)

FREQUENCY (MHz)		CONVERSION LOSS (dB)			LO-RF ISOLATION (dB)		LO-IF ISOLATION (dB)		IP3 at center band (dBm)
LO/RF f _i -f _o	IF	$\bar{X}$	σ	Max.	Typ.	Min.	Typ.	Min.	
500-3500	10-1500	6.9	0.1	8.9					
500-800	10-300	6.3	0.1	7.7	18	11	32	20	26
800-1000	10-200	6.4	0.1	7.6	24	17	27	20	26
1000-1800	10-800	6.6	0.1	8.6	29	20	26	20	24
1800-2000	10-200	6.0	0.1	7.6	30	22	26	20	24
1800-2500	10-700	5.8	0.1	7.6	30	22	27	19	22
2000-3500	10-1500	6.5	0.1	8.6	29	17	22	14	23


1 dB COMPR. +14 dBm typ.

• see individual band specs

Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +17dBm	LO +17dBm	LO +17dBm	LO +17dBm	LO +17dBm
501.00	531.00	6.02	16.19	33.30	1.67	1.57
601.00	631.00	5.93	17.94	31.90	1.93	1.39
701.00	731.00	5.87	20.08	31.13	2.33	1.24
801.00	831.00	6.50	22.69	29.81	3.04	1.25
901.00	931.00	6.28	26.16	29.31	3.47	1.26
1101.00	1131.00	6.48	32.24	27.89	4.32	1.39
1301.00	1331.00	6.62	30.73	26.48	2.63	1.45
1501.00	1531.00	7.32	27.40	26.27	1.85	1.50
1701.00	1731.00	6.32	27.63	29.18	1.95	1.44
1901.00	1931.00	6.07	30.06	30.97	1.84	1.58
2101.00	2131.00	5.88	31.94	29.21	1.44	1.63
2301.00	2331.00	5.99	30.11	27.83	1.61	1.82
2501.00	2531.00	6.00	29.06	26.52	2.15	1.80
2701.00	2731.00	6.73	30.39	25.95	2.70	1.64
2901.00	2931.00	6.88	30.46	24.83	3.11	1.79
3100.00	3130.00	6.88	31.18	25.70	4.03	2.13
3200.00	3230.00	6.61	30.89	25.41	3.89	2.09
3300.00	3330.00	6.50	31.82	27.53	3.47	1.95
3400.00	3430.00	6.27	31.14	26.35	3.13	1.78
3500.00	3530.00	6.05	28.30	27.50	2.70	1.75

Electrical Schematic

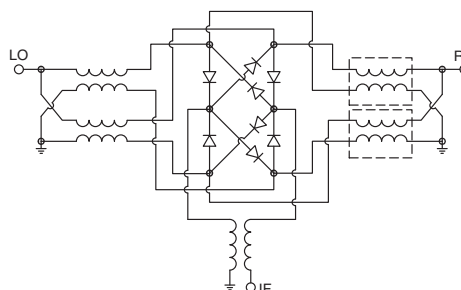

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine www.minicircuits.com Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

For detailed performance specs
& shopping online see web site

REV. E
M108294
ED-9595C/1
MCA-35H+
DJ/TD/CP/AM
100221
Page 1 of 2

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuits' applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

