

Surface Mount

High Reliability Mixer

Level 10 (LO Power +10 dBm) 1750 to 3500 MHz

ADE-R18WLH+



Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	50mW
IF Current	40mA

Permanent damage may occur if any of these limits are exceeded.


Pin Connections

LO	4
RF	6
IF	3
GROUND	1,2,5

Outline Drawing

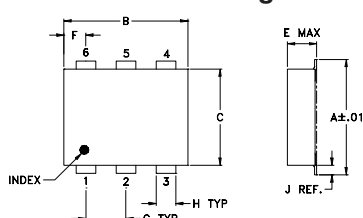

PCB Land Pattern




Suggested Layout,
Tolerance to be within ±.002

Outline Dimensions (inch)

A	B	C	D	E	F	G
.272	.310	.220	.100	.112	.055	.100
6.91	7.87	5.59	2.54	2.84	1.40	2.54

H	J	K	L	wt
.030	.026	.065	.300	grams
0.76	0.66	1.65	7.62	0.20

Demo Board MCL P/N: TB-02 Suggested PCB Layout (PL-051)

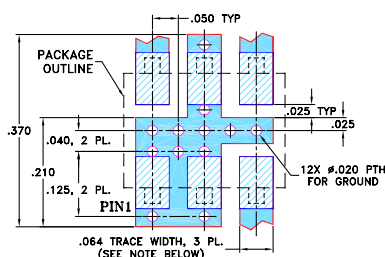

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- hermetically sealed ceramic quad
- low conversion loss, 5.4 dB typ.
- good L-R isolation, 33 dB typ.
- low profile package
- aqueous washable
- protected by US Patent 6,133,525

Applications

- PCS
- MMDS
- ISM

CASE STYLE: CD542
PRICE: \$4.35 ea. QTY. (20)

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications



Available Tape and Reel
at no extra cost

Reel Size	Devices/Reel
7"	20, 50, 100, 200, 500
13"	500, 1000

Electrical Specifications


FREQUENCY (MHz)	CONVERSION LOSS (dB)	LO-RF ISOLATION (dB)	LO-IF ISOLATION (dB)	IP3 at center band (dBm)
LO/RF f_L-f_U	$\bar{X}$ σ Total Range Max.	Typ. Min.	Typ. Min.	Typ.
1750-3500 DC-700	5.4 0.30 8.9	33 22	12 7	11

1 dB COMP.: +5 dBm typ.

Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +10dBm	LO +10dBm	LO +10dBm	LO +10dBm	LO +10dBm
1770.00	1800.00	6.09	29.98	20.02	4.01	4.74
1850.00	1880.00	5.67	30.43	18.09	3.26	4.51
1930.00	1960.00	5.44	30.83	16.42	2.63	4.33
2010.00	2040.00	5.29	30.53	14.85	2.07	4.20
2170.00	2200.00	5.26	29.61	12.43	1.29	3.95
2250.00	2280.00	5.24	29.05	11.80	1.10	3.80
2330.00	2360.00	5.21	29.58	11.39	1.08	3.72
2410.00	2440.00	5.15	30.43	11.22	1.15	3.63
2570.00	2600.00	5.28	32.05	11.59	1.52	3.37
2650.00	2680.00	5.22	33.90	12.03	1.65	3.30
2730.00	2760.00	5.14	35.97	12.38	1.76	3.26
2810.00	2840.00	5.13	37.60	12.42	1.85	3.15
2970.00	3000.00	5.44	37.23	12.94	2.05	2.98
3050.00	3080.00	5.50	39.39	13.16	2.06	3.07
3130.00	3160.00	5.54	41.93	13.56	2.04	3.02
3210.00	3240.00	5.59	41.54	14.09	2.02	2.98
3290.00	3320.00	5.88	40.92	14.59	2.15	3.01
3370.00	3400.00	6.23	40.74	15.02	2.42	2.94
3450.00	3480.00	6.54	42.04	15.36	2.74	2.93
3530.00	3560.00	6.75	44.44	15.68	3.00	2.84

Electrical Schematic

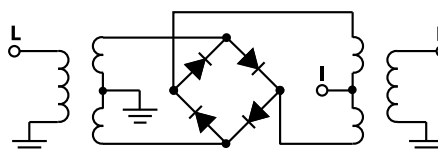

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuits' applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

For detailed performance specs
& shipping online see web site

REV. OR
M109914
ADE-R18WLH+
ED-12873/1
WL/TD/CP
1206287
Page 1 of 2

