

Ceramic

Frequency Mixer WIDE BAND

MCA1T-85L+

Level 4 (LO Power+4 dBm) 2800 to 8500 MHz


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-40°C to 85°C
RF Power	50 mW
IF Current	40 mA
Permanent damage may occur if any of these limits are exceeded.	

Pin Connections

LO	10
RF	5
IF	3
GROUND	1,2,4,6,7,8,9


Outline Drawing

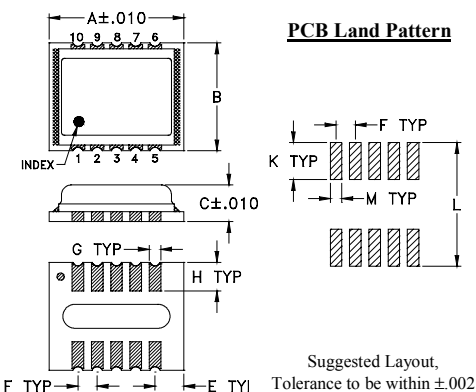

Outline Dimensions (inch/mm)

A	B	C	E	F	G
.350	.280	.095	.075	.050	.030
8.89	7.11	2.41	1.91	1.27	0.76
H	K	L	M	wt	
.074	.096	.321	.030	grams	
1.88	2.44	8.15	0.76	0.21	

Demo Board MCL P/N: TB-493+ Suggested PCB Layout (PL-288)

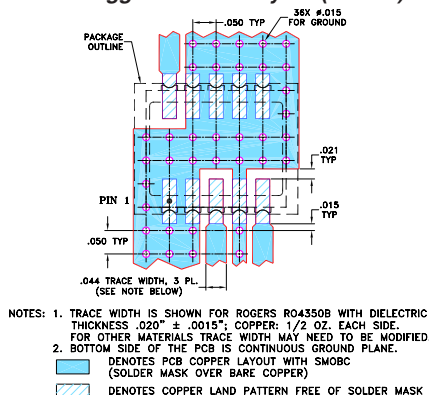

Features

- wide bandwidth, 2800 to 8500 MHz
- high L-R isolation, 35 dB typ.
- IF, DC to 1200 MHz
- LTCC double balanced mixer
- aqueous washable
- low cost
- low profile, 0.095"
- protected by US Patent 7,027,795
- additional patent pending

Applications

- satellite up and down converters
- line of sight links
- defense radar
- defense communication

Electrical Specifications (T_{AMB}=-40°C to 85°C)

FREQUENCY (MHz)		CONVERSION LOSS (dB)			LO-RF ISOLATION (dB)		LO-IF ISOLATION (dB)		IP3 at center band (dBm)
LO/RF f _L -f _U	IF	$\bar{X}$	σ	Max.	Typ.	Min.	Typ.	Min.	
2800-8500	DC-1200								
2800-5000	DC-1200	5.7	0.2	8.4*	35	20	13	7	11
5000-7500	DC-1200	6.0	0.3	8.4*	35	20	38	20	7
7500-8500	DC-1200	7.0	0.3	—	31	—	32	—	8


1 dB COMPR. 0 dBm typ.

* Conversion loss at 30 MHz IF, increases with IF frequency.

Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +4dBm	LO +4dBm	LO +4dBm	LO +4dBm	LO +4dBm
2800.00	2770.10	6.57	35.68	11.51	2.96	2.36
3028.00	2998.10	6.02	35.94	13.02	2.53	2.01
3514.00	3484.10	5.36	36.84	13.44	1.60	2.34
4000.00	3970.10	6.20	27.71	11.19	2.09	2.43
4567.00	4537.10	6.88	26.37	18.64	1.76	2.49
5030.00	5000.10	6.65	30.49	25.08	2.34	2.87
5530.00	5500.10	6.49	36.99	30.26	2.22	3.70
6108.00	6078.10	6.98	50.37	37.40	3.10	3.61
6345.00	6315.10	6.64	39.24	41.03	2.90	3.58
6582.00	6552.10	6.46	40.54	44.77	2.57	3.38
6819.00	6789.10	6.25	37.96	43.02	2.52	3.48
7056.00	7026.10	6.25	37.74	39.02	2.45	3.19
7293.00	7263.10	6.30	34.97	35.49	2.32	3.22
7530.00	7500.10	6.44	32.69	35.99	2.26	3.00
7767.00	7737.10	6.58	30.94	29.06	2.27	2.91
8004.00	7974.10	6.46	28.52	22.33	2.02	2.80
8050.00	8020.10	6.38	28.47	21.82	1.99	2.74
8150.00	8120.10	6.24	27.46	21.67	1.87	2.46
8500.00	8470.10	6.07	24.98	23.26	1.49	1.77
8550.00	8520.10	6.26	24.71	23.44	1.46	2.13

Electrical Schematic

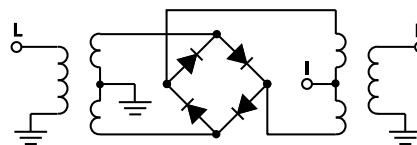

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

For detailed performance specs & shopping online see web site www.minicircuits.com

IF/RF MICROWAVE COMPONENTS









P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine www.minicircuits.com Provides ACTUAL Data Instantly at www.minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp.

REV. A
M128524
MCA1T-85L+
DJ/RS/CP/AM
100816
Page 1 of 2

Performance Charts

MCA1T-85L+

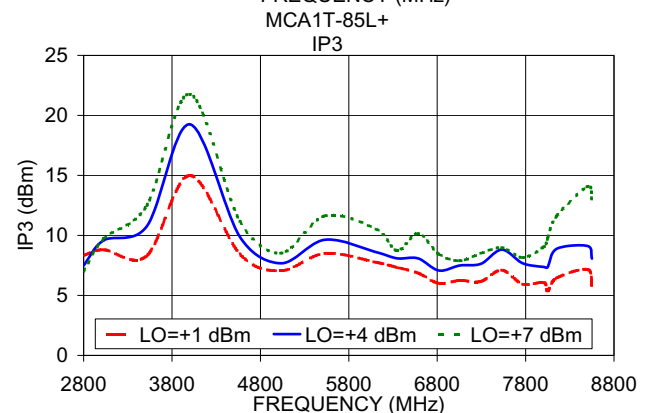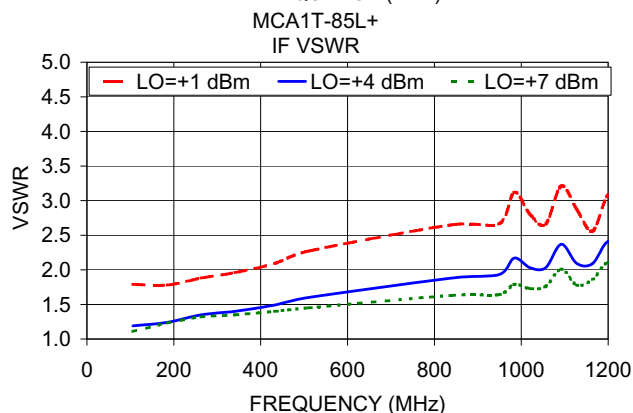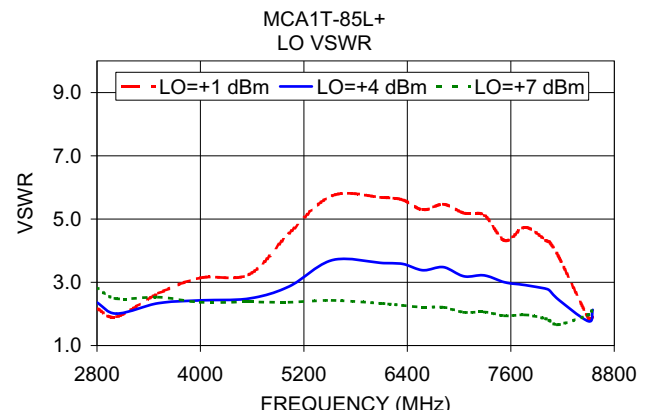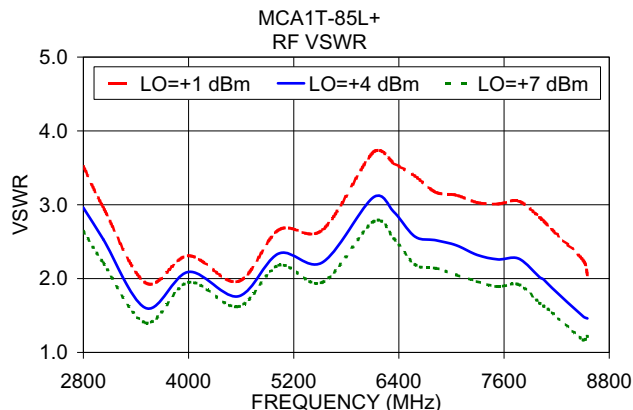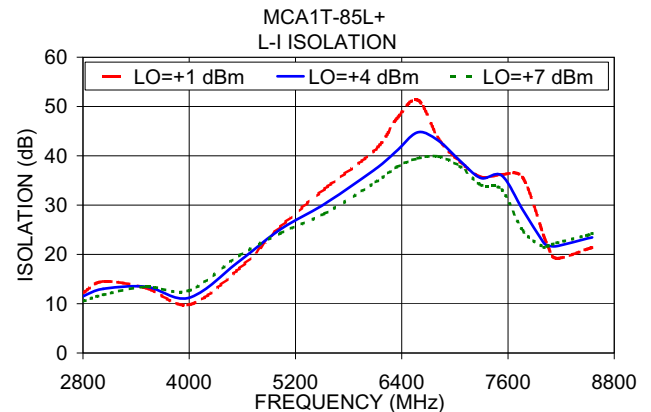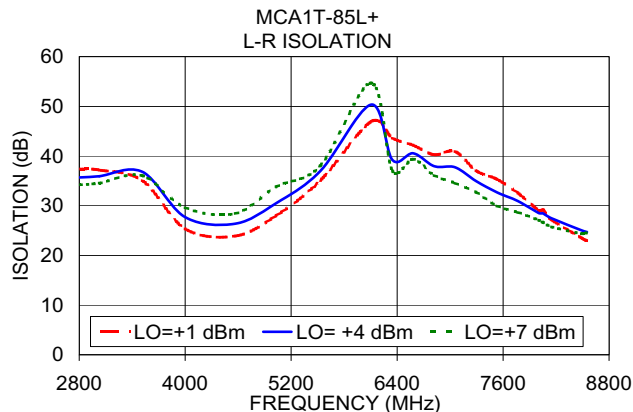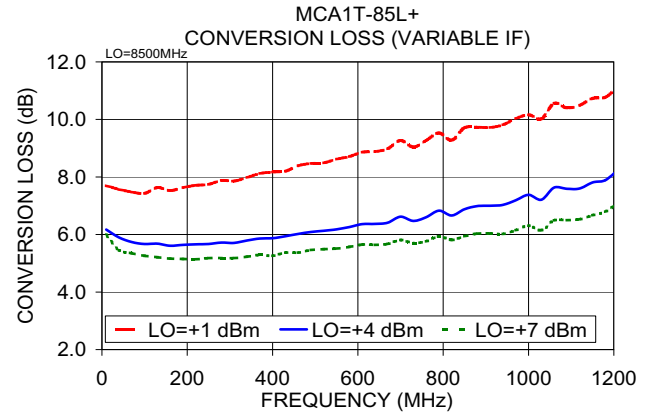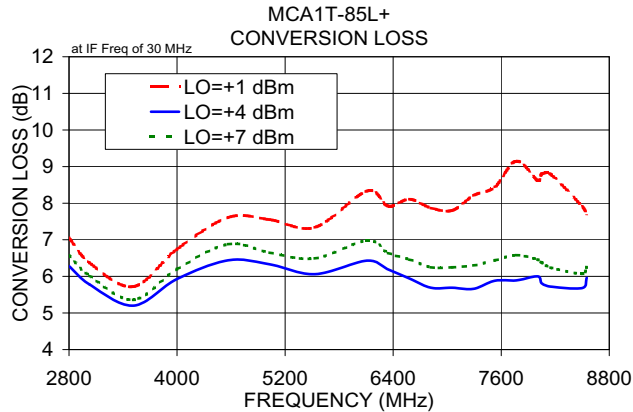

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine www.minicircuits.com Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

For detailed performance specs
& shopping online see web site