


Ceramic

Frequency Mixer WIDE BAND

Level 7 (LO Power+7 dBm) 2800 to 8500 MHz

MCA1T-85+



CASE STYLE: DZ885-2

PRICE: \$7.45 ea. QTY (10-49)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Maximum Ratings

Operating Temperature -40°C to 85°C

Storage Temperature -40°C to 85°C

RF Power 50 mW

IF Current 40 mA

Permanent damage may occur if any of these limits are exceeded.

Pin Connections

LO 10

RF 5

IF 3

GROUND 1,2,4,6,7,8,9

Features

- wide bandwidth, 2800 to 8500 MHz
- low conversion loss, 5.6 dB typ.
- high L-R isolation, 35 dB typ.
- IF, DC to 1250 MHz
- LTCC double balanced mixer
- aqueous washable
- low cost
- low profile, 0.095"
- protected by US Patent 7,027,795
- additional patent pending

Applications

- satellite up and down converters
- line of sight links
- defense radar
- defense communication


Electrical Specifications (T_{AMB}=-40°C to 85°C)

FREQUENCY (MHz)		CONVERSION LOSS (dB)			LO-RF ISOLATION (dB)		LO-IF ISOLATION (dB)		IP3 at center band (dBm)
LO/RF f _L -f _U	IF	$\bar{X}$	σ	Max.	Typ.	Min.	Typ.	Min.	
2800-8500	DC-1250								
2800-5000	DC-1250	5.5	0.2	8.1*	40	20	13	9	13
5000-8500	DC-1250	5.7	0.2	8.2*	35	20	40	20	8

1 dB COMPR. 1 dBm typ.

* Conversion loss at 30 MHz IF, increases with IF frequency.


Outline Drawing

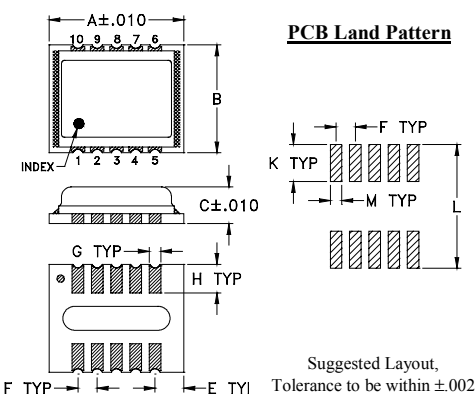

Outline Dimensions (inch/mm)

A	B	C	E	F	G
.350	.280	.095	.075	.050	.030
8.89	7.11	2.41	1.91	1.27	0.76
H	K	L	M	wt	
.074	.096	.321	.030	grams	
1.88	2.44	8.15	0.76	0.21	


Demo Board MCL P/N: TB-493+ Suggested PCB Layout (PL-288)

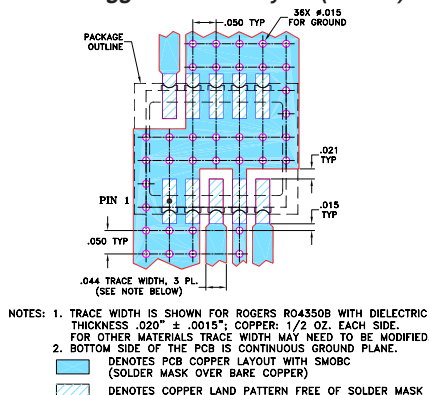

Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm
2800.00	2770.10	6.35	35.65	10.55	2.59	2.68
3028.00	2998.10	5.90	37.21	12.14	2.18	2.70
3271.00	3241.10	5.58	44.37	13.05	1.90	2.72
3514.00	3484.10	5.33	35.45	13.77	1.42	2.61
3757.00	3727.10	5.14	31.26	13.95	1.44	2.47
4000.00	3970.10	5.86	30.23	13.20	1.99	2.52
4567.00	4537.10	6.56	28.89	20.26	1.79	2.62
5030.00	5000.10	6.27	33.31	24.63	2.27	2.34
5130.00	5100.10	6.09	35.41	25.37	2.15	2.36
5230.00	5200.10	5.93	38.03	26.19	2.15	2.37
5380.00	5350.10	5.87	42.25	27.30	1.95	2.31
5530.00	5500.10	6.06	38.43	28.68	1.92	2.11
6074.00	6044.10	6.51	45.52	35.91	3.06	2.28
6548.00	6518.10	6.03	42.46	41.49	2.36	2.33
7022.00	6992.10	5.74	32.74	37.94	2.13	2.39
7496.00	7466.10	5.73	29.86	34.25	1.74	2.37
8000.00	7970.10	5.81	26.56	22.16	1.42	2.77
8200.00	8170.10	5.50	24.77	22.74	1.27	2.77
8400.00	8370.10	5.49	23.62	23.64	1.07	2.46
8500.00	8470.10	5.58	23.65	24.05	1.10	2.36

Electrical Schematic

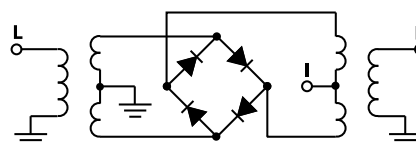

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

IF/RF MICROWAVE COMPONENTS

For detailed performance specs & shopping online see web site








P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp.

REV. A
M130861
MCA1T-85+
DJ/RS/CP/AM
110304
Page 1 of 2

Performance Charts

MCA1T-85+

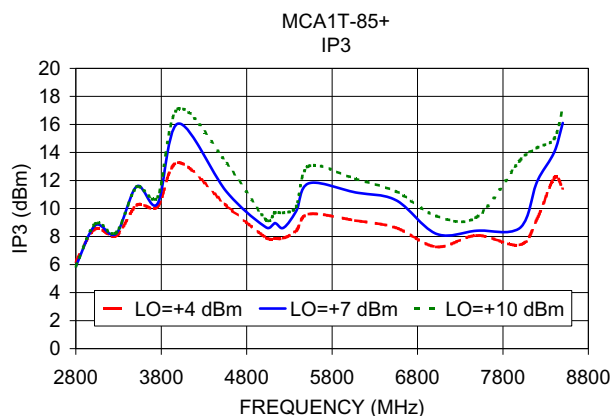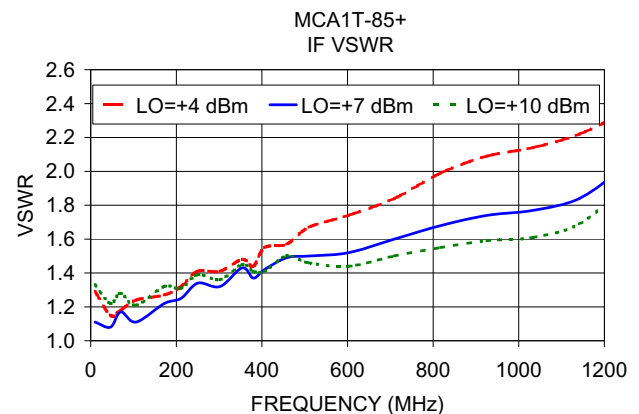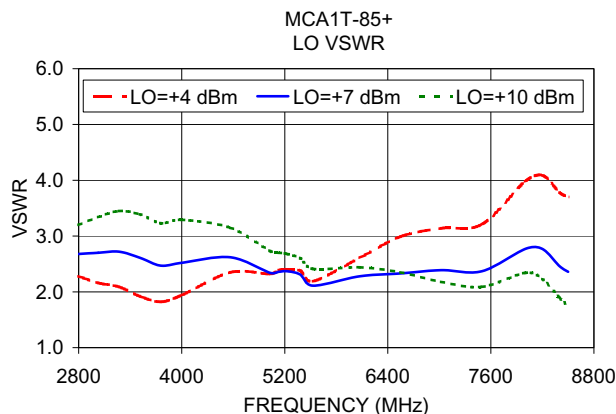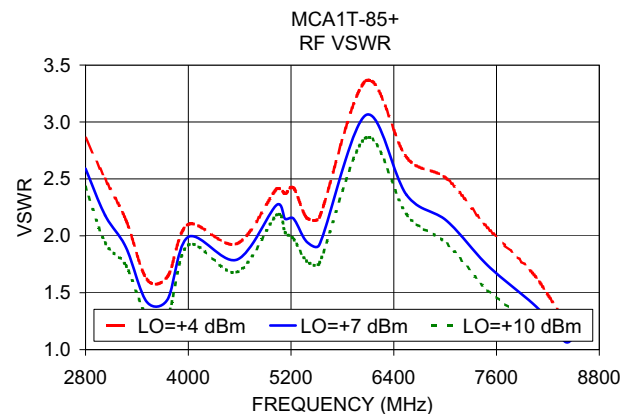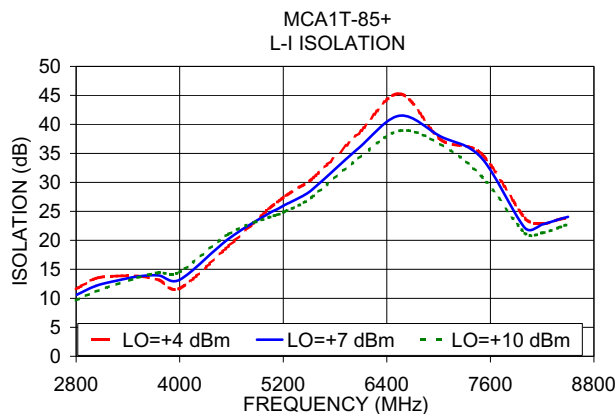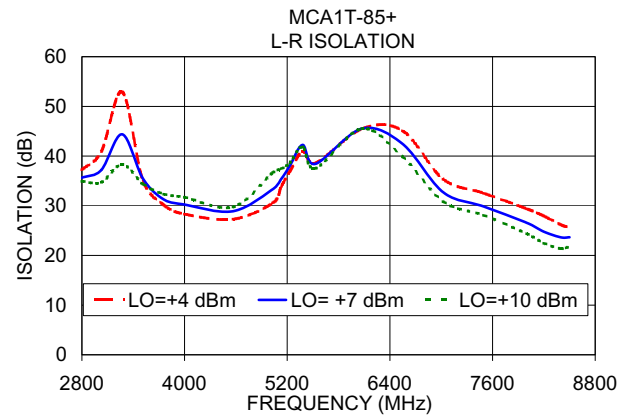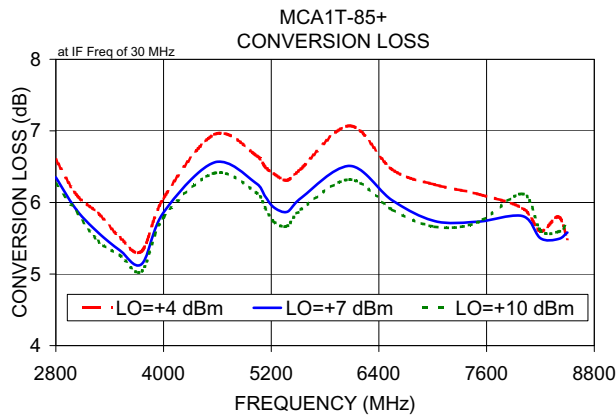

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine www.minicircuits.com Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp.

For detailed performance specs
& shopping online see web site