

Frequency Mixer WIDE BAND

SIM-43MH+

Level 13 (LO Power +13 dBm) 824 to 4200 MHz

Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	50mW

For extended temperature range, consult factory.
Permanent damage may occur if any of these limits are exceeded.


Pin Connections

LO	8
RF	4
IF	2
GROUND	1,3,5,6,7

Outline Drawing

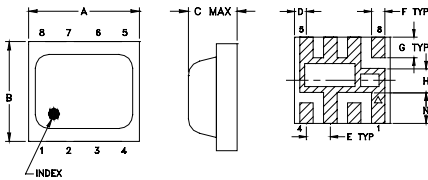

PCB Land Pattern




Suggested Layout,
Tolerance to be within ±0.02

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.200	.180	.087	.025	.050	.028	.043
5.08	4.57	2.21	0.64	1.27	0.71	1.09
H	J	K	L	M	N	wt
.050	.030	.060	0.238	0.144	0.065	grams
1.27	0.76	1.52	6.05	3.66	1.65	0.08

Demo Board MCL P/N: TB-382 Suggested PCB Layout (PL-239)

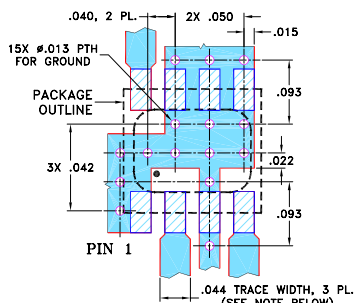

NOTES:

- TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .020" ± .0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 - BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- wide bandwidth, 824 to 4200 MHz
- low conversion loss, 6.1 dB typ.
- excellent L-R isolation, 35 dB typ.
- LTCC double balanced mixer
- tiny size, low profile, 0.08"
- useable as up and down converter
- aqueous washable
- protected by US patent 7,027,795

Applications

- cellular
- defense & weather radar
- defense communications
- PCN
- WCDMA
- WIFI
- blue tooth
- VSAT
- ISM

Electrical Specifications

FREQUENCY (MHz)	CONVERSION LOSS* (dB)	LO-RF ISOLATION (dB)		LO-IF ISOLATION (dB)		IP3 at center band (dBm)			
		Typ.	σ	Max.	Typ.		Min.		
LO/RF $f_c - f_u$	IF	Typ.	σ	Max.	Typ.	Min.	Typ.		
824-4200	DC-1500	6.3	0.1	8.3	37	26	24	10	20
824-2500		5.7	0.1	9.8	30	22	20	14	22


1 dB Compression: +9 dBm typ.

* Conversion loss at 30 MHz IF. σ is a measure of repeatability from unit to unit.

Typical Performance Data

Frequency (MHz)	Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)	
						LO +13dBm
RF	LO	+13dBm	+13dBm	+13dBm	+13dBm	
750.00	780.00	7.46	39.30	22.20	2.30	8.86
825.00	855.00	6.69	35.94	23.10	1.81	4.77
900.00	930.00	6.56	35.28	23.61	1.86	3.65
975.00	1005.00	6.87	37.48	24.51	2.51	2.65
1050.00	1080.00	6.25	41.33	27.47	2.83	2.12
1125.00	1155.00	5.97	45.94	29.67	3.08	1.81
1200.00	1230.00	5.82	52.76	31.04	3.25	1.53
1275.00	1305.00	6.05	46.72	31.39	3.41	1.29
1350.00	1380.00	6.05	42.28	35.10	3.60	1.13
1425.00	1455.00	5.78	39.40	38.15	3.29	1.19
1500.00	1530.00	5.68	37.98	39.15	2.91	1.37
1800.00	1830.00	5.78	37.32	21.79	2.22	1.67
2100.00	2130.00	5.75	34.21	14.00	2.30	1.88
2400.00	2430.00	5.36	31.94	17.74	1.93	2.36
2700.00	2730.00	5.77	30.66	23.65	2.44	2.04
3000.00	3030.00	5.61	29.22	29.71	2.26	1.72
3360.00	3390.00	5.94	28.61	24.35	2.37	1.80
3540.00	3570.00	6.60	26.65	22.73	3.15	2.36
4080.00	4110.00	7.87	26.87	19.22	4.15	4.21
4260.00	4290.00	8.69	27.67	19.60	5.02	5.88

Electrical Schematic

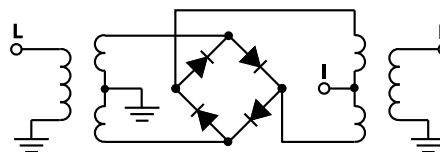

CASE STYLE: HV1195
PRICE: \$7.45 ea. QTY (10)

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications









Available Tape and Reel at no extra cost

Reel Size	Devices/Reel
7"	10, 20, 50, 100, 200, 500

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuits' applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. OR
M109118
SIM-43MH+
ED-12399/13
DJ/RS/CP/QL
120822

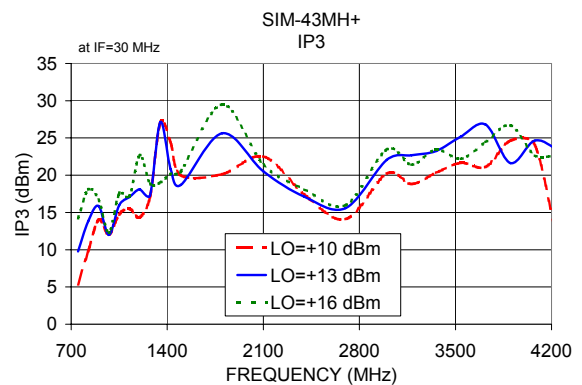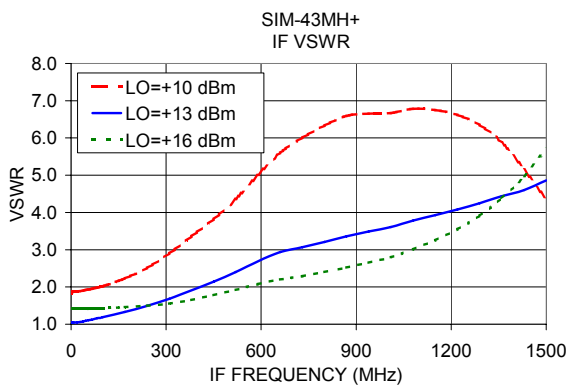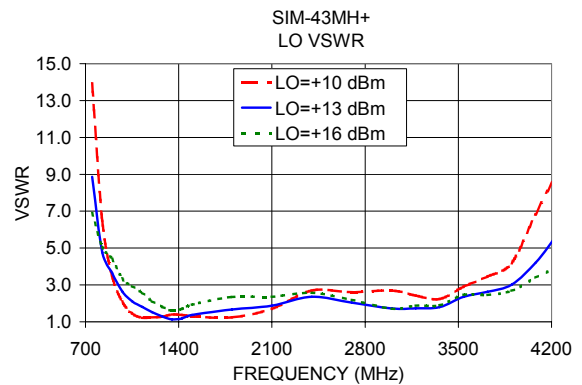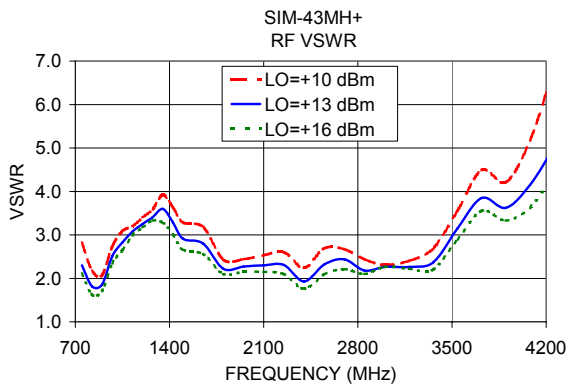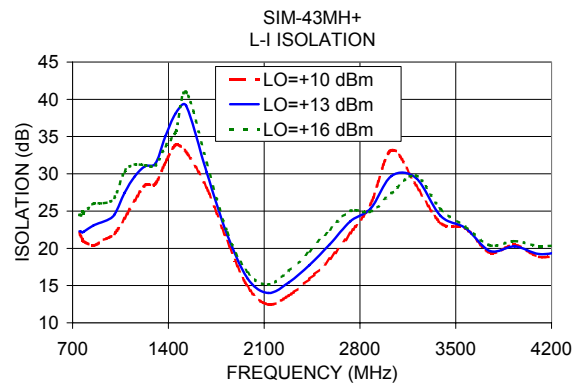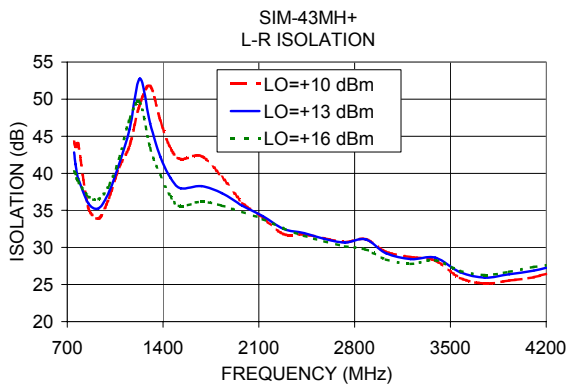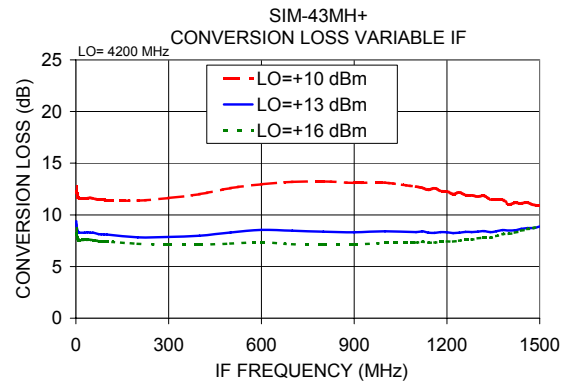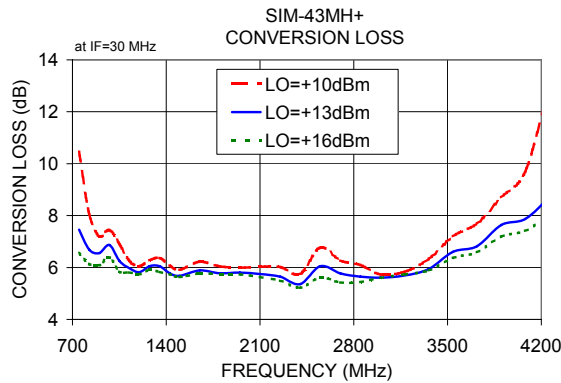

For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuits' applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.